

ISSN 1726-5479

# SENSORS & TRANSDUCERS

vol. 17  
Special  
**1**/13



**Sensor Devices  
and Wireless Sensor Networks**

International Frequency Sensor Association Publishing



Copyright © 2013 IFSA Publishing. All rights reserved.

This journal and the individual contributions in it are protected under copyright by IFSA Publishing, and the following terms and conditions apply to their use:

*Photocopying:* Single photocopies of single articles may be made for personal use as allowed by national copyright laws. Permission of the Publisher and payment of a fee is required for all other photocopying, including multiple or systematic copyright, copyright for advertising or promotional purposes, resale, and all forms of document delivery.

*Derivative Works:* Subscribers may reproduce tables of contents or prepare list of articles including abstract for internal circulation within their institutions. Permission of the Publisher is required for resale or distribution outside the institution.

Permission of the Publisher is required for all other derivative works, including compilations and translations.

Authors' copies of Sensors & Transducers journal and articles published in it are for personal use only.

Address permissions requests to: IFSA Publisher by e-mail: [editor@sensorsportal.com](mailto:editor@sensorsportal.com)

Notice: No responsibility is assumed by the Publisher for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions or ideas contained in the material herein.

Printed in the USA.



# Sensors & Transducers

Volume 18, Special Issue  
January 2013

[www.sensorsportal.com](http://www.sensorsportal.com)

ISSN 1726-5479

**Editors-in-Chief:** professor Sergey Y. Yurish,  
Tel.: +34 696067716, e-mail: [editor@sensorsportal.com](mailto:editor@sensorsportal.com)

## Editors for Western Europe

Meijer, Gerard C.M., Delft Univ. of Technology, The Netherlands  
Ferrari, Vittorio, Università di Brescia, Italy

## Editor for Eastern Europe

Sachenko, Anatoly, Ternopil National Economic University, Ukraine

## Editors for North America

Katz, Evgeny, Clarkson University, USA  
Datskos, Panos G., Oak Ridge National Laboratory, USA  
Fabien, J. Josse, Marquette University, USA

## Editor South America

Costa-Felix, Rodrigo, Inmetro, Brazil

## Editor for Asia

Ohyama, Shinji, Tokyo Institute of Technology, Japan  
Zhengbing, Hu, Huazhong Univ. of Science and Technol., China

## Editor for Asia-Pacific

Mukhopadhyay, Subhas, Massey University, New Zealand

## Editor for Africa

Maki K.Habib, American University in Cairo, Egypt

## Editorial Board

Abdul Rahim, Ruzairi, Universiti Teknologi, Malaysia  
Abramchuk, George, Measur. Tech. & Advanced Applications, Canada  
Ascoli, Giorgio, George Mason University, USA  
Atalay, Selcuk, Inonu University, Turkey  
Atghiaee, Ahmad, University of Tehran, Iran  
Ayesh, Aladdin, De Montfort University, UK  
Baliga, Shankar, B., General Motors, USA  
Basu, Sukumar, Jadavpur University, India  
Bouvet, Marcel, University of Burgundy, France  
Campanella, Luigi, University La Sapienza, Italy  
Carvalho, Vitor, Minho University, Portugal  
Changhai, Ru, Harbin Engineering University, China  
Chen, Wei, Hefei University of Technology, China  
Cheng-Ta, Chiang, National Chia-Yi University, Taiwan  
Chung, Wen-Yaw, Chung Yuan Christian University, Taiwan  
Cortes, Camilo A., Universidad Nacional de Colombia, Colombia  
D'Amico, Arnaldo, Università di Tor Vergata, Italy  
De Stefano, Luca, Institute for Microelectronics and Microsystem, Italy  
Ding, Jianing, Changzhou University, China  
Djordjevic, Alexandar, City University of Hong Kong, Hong Kong  
Donato, Nicola, University of Messina, Italy  
Dong, Feng, Tianjin University, China  
Erkmen, Aydan M., Middle East Technical University, Turkey  
Gaura, Elena, Coventry University, UK  
Gole, James, Georgia Institute of Technology, USA  
Gong, Hao, National University of Singapore, Singapore  
Gonzalez de la Rosa, Juan Jose, University of Cadiz, Spain  
Guillet, Bruno, University of Caen, France  
Hadjilucas, Sillas, The University of Reading, UK  
Hui, David, University of New Orleans, USA  
Jaffrezic-Renault, Nicole, Ecole Centrale de Lyon, France  
Jamil, Mohammad, Qatar University, Qatar  
Kaniusas, Eugenijus, Vienna University of Technology, Austria  
Kim, Min Young, Kyungpook National University, Korea  
Kumar, Arun, University of Delaware, USA  
Lay-Ekuakille, Aime, University of Lecce, Italy  
Lin, Paul, Cleveland State University, USA  
Liu, Aihua, Chinese Academy of Sciences, China

Mansor, Muhammad Naufal, University Malaysia Perlis, Malaysia  
Marquez, Alfredo, Centro de Investigacion en Materiales Avanzados, Mexico  
Mishra, Vivekanand, National Institute of Technology, India  
Moghavvemi, Mahmoud, University of Malaya, Malaysia  
Morello, Rosario, University "Mediterranea" of Reggio Calabria, Italy  
Mulla, Imtiaz Sirajuddin, National Chemical Laboratory, Pune, India  
Nabok, Aleksey, Sheffield Hallam University, UK  
Neshkova, Milka, Bulgarian Academy of Sciences, Bulgaria  
Passaro, Vittorio M. N., Politecnico di Bari, Italy  
Penza, Michele, ENEA, Italy  
Pereira, Jose Miguel, Instituto Politecnico de Seteбал, Portugal  
Pogacnik, Lea, University of Ljubljana, Slovenia  
Pullini, Daniele, Centro Ricerche FIAT, Italy  
Reig, Candid, University of Valencia, Spain  
Restivo, Maria Teresa, University of Porto, Portugal  
Rodríguez Martínez, Angel, Universidad Politécnica de Cataluña, Spain  
Sadana, Ajit, University of Mississippi, USA  
Sadeghian Marnani, Hamed, TU Delft, The Netherlands  
Sapozhnikova, Ksenia, D. I. Mendeleyev Institute for Metrology, Russia  
Singhal, Subodh Kumar, National Physical Laboratory, India  
Shah, Kriyang, La Trobe University, Australia  
Shi, Wendian, California Institute of Technology, USA  
Shmaliy, Yuriy, Guanajuato University, Mexico  
Song, Xu, An Yang Normal University, China  
Srivastava, Arvind K., LightField, Corp, USA  
Stefanescu, Dan Mihai, Romanian Measurement Society, Romania  
Sumriddetchkajorn, Sarun, Nat. Electr. & Comp. Tech. Center, Thailand  
Sun, Zhiqiang, Central South University, China  
Sysoev, Victor, Saratov State Technical University, Russia  
Thirunavukkarasu, I., Manipal University Karnataka, India  
Vazquez, Carmen, Universidad Carlos III Madrid, Spain  
Xue, Ning, Agiltron, Inc., USA  
Yang, Dongfang, National Research Council, Canada  
Yang, Shuang-Hua, Loughborough University, UK  
Yaping Dan, Harvard University, USA  
Zakaria, Zulkarnay, University Malaysia Perlis, Malaysia  
Zhang, Weiping, Shanghai Jiao Tong University, China  
Zhang, Wenming, Shanghai Jiao Tong University, China

# Contents

Volume 18  
Special Issue  
January 2013

[www.sensorsportal.com](http://www.sensorsportal.com)

ISSN 1726-5479

## Research Articles

### Editorial

*Sergey Y. Yurish* ..... 1

### 10 Top Reasons to Include SENSORDEVICES Conference in your Calendar of Events

*Sergey Y. Yurish* ..... 1

### From Sensors to Applications: A Proposal to Fill the Gap

*Vincenzo Di Lecce, Marco Calabrese, Claudio Martines*..... 5

### Smart Sensors and Actuators: A Question of Discipline

*Hoel Iris, François Pacull* ..... 14

### Atmospheric Icing Sensors - Capacitive Techniques

*Umair N. Mughal, Muhammad S. Virk* ..... 24

### Design of a Sigma-Delta Interface for Heat Balanced Bolometer

*Matthieu Denoual, Damien Brouard, Arthur Veith, Mathieu Pouliquen, Olivier de Sagazan, Patrick Attia, Gilles Allegre*..... 33

### Implementation of a Shoe-Embedded Human Interface and Collaborative Supplementation of Service Requirements on Smartphone System

*Kaname Takaochi, Kazuhiro Watanabe, Kazumasa Takami* ..... 47

### Module with Piezoelectric Sensor for Acoustic Emission Applications

*Irinela Chilibon, Marian Mogildea, George Mogildea*..... 59

### Performance Improvement of High Frequency Aluminum Nitride Ultrasonic Transducers

*Yangjie Wei, Thomas Herzog and Henning Heuer*..... 66

### Development of Specialty Optical Fiber Incorporated with Au Nano-particles in Cladding for Surface Plasmon Resonance Sensors

*Seongmin Ju, Seongmook Jeong, Youngwoong Kim, Poram Jeon, Won-Taek Han, Seongjae Boo, Pramod R. Watekar*..... 76

### Selective Detection of Hydrogen with Surface Acoustic Wave Devices Using Palladium Layer Properties

*Meddy Vanotti, Virginie Blondeau-Patissier, David Rabus, Jean-Yves Rauch, Sylvain Ballandras* ..... 84

### High Performance Sensor Nodes for Wireless Sensor Networks Applications

*Sergey Y. Yurish and Javier Cañete*..... 92

### Intelligent Parking Management System Based on Wireless Sensor Network Technology

*Nikos Larisis, Leonidas Perlepes, George Stamoulis, Panayiotis Kikiras* ..... 100

<b>Wireless Underwater Monitoring Systems Based on Energy Harvestings</b> <i>Sea-Hee Hwangbo, Jun-Ho Jeon and Sung-Joon Park</i> .....	113
<b>Assessing the Impact of Wind on Detecting Fire Using a Wireless Sensor Network</b> <i>Ronald Beaubrun and Yacine Kramia</i> .....	120
<b>All Organic Flexible Lightweight BL-Film Sensor Systems with Wireless Data Transmission</b> <i>Raphael Pfattner, Victor Lebedev, Bahareh Moradi, Elena Laukhina, Vladimir Laukhin, Concepció Rovira, Jaume Veciana</i> .....	128
<b>A Medical Wireless Measurement System for Hip Prosthesis Loosening Detection Based on Vibration Analysis</b> <i>Sebastian Sauer, Sabine Kirsten, Florian Storck, Hagen Grätz, Uwe Marschner, Dietmar Ruwisch and Wolf-Joachim Fischer</i> .....	134
<b>Wireless Sensor Network Simulation: The Current State and Simulation Tools</b> <i>Fayez Al-Fayez, Abdelrahman Abuarqoub, Mohammad Hammoudeh, Andrew Nisbet</i> .....	145
<b>Low Power Consumption Wireless Sensor Communication System Integrated with an Energy Harvesting Power Source</b> <i>Vlad Marsic, Alessandro Giuliano and Meiling Zhu</i> .....	156
<b>Power Saving Algorithm for Monitoring Extreme Values in Sensor Networks</b> <i>Pei-Hsuan Tsai, Chun-Lung Lin, Jau-Wu Huang, Jia-Shung Wang</i> .....	166
<b>Faults in Sensory Readings: Classification and Model Learning</b> <i>Valentina Baljak, Tei Kenji, Shinichi Honiden</i> .....	177
<b>On QoS Guarantees of Error Control Schemes for Data Dissemination in a Chain-based Wireless Sensor Networks</b> <i>Zahra Taghikhaki, Nirvana Meratnia, Paul J. M. Havinga</i> .....	188

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: [editor@sensorsportal.com](mailto:editor@sensorsportal.com)  
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).

**Advertise in  
Sensors & Transducers Journal  
and Sensors Web Portal**




**TURN  
OUR VISITORS  
INTO  
YOUR CUSTOMERS  
BY THE SHORTEST WAY**

[http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2012.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2012.pdf)  
[sales@sensorsportal.com](mailto:sales@sensorsportal.com)



## Atmospheric Icing Sensors - Capacitive Techniques

<sup>1</sup> Umair N. Mughal, Muhammad S. Virk

Narvik University College, Narvik-8505, Norway

<sup>1</sup> Tel.: +4776966372, +4776966810

E-mail: unm@hin.no

Received: 30 October 2012 /Accepted: 14 December 2012 /Published: 22 January 2013

**Abstract:** The application of capacitive sensing technique is widely distributed in different physical domains primarily because of the diversity in dielectric permittivity and due to its minimum loading error and inertial effects. Atmospheric ice is a complex mixture of water, ice and air which is reflected in its complex dielectric constant. There are many existing atmospheric icing sensors but only few are based on their complex dielectric permittivity measurements. This technique is very suitable because the capacitive variation in this mixture is due to the reorientation of water dipole in the electromagnetic radiation's oscillating field. Depending on the frequency, the dipole may move in time to the field, lag behind it or remain apparently unaffected. This variation is clearly reflected on the Cole-Cole-diagram, which is a measure of the relaxation frequency. This paper is a detailed understanding of some capacitive sensing techniques in general but based upon dielectric variations and some existing capacitive based atmospheric ice sensing techniques. It is emphasized that the capacitive method proposed by Jarvenin provides maximum atmospheric icing parameters hence future atmospheric icing sensors may utilize the proposed technique with some modifications to further reduce the loading errors. Copyright © 2013 IFSA.

**Keywords:** Atmospheric ice, Relaxation frequency, Debye relation, Dielectric, Capacitance.

### 1. Introduction

*Atmospheric icing* is the term used to describe the accretion of ice on structures or objects under certain conditions. This accretion can take place either due to freezing precipitation or freezing fog. It depends mainly on the shape of the object, wind speed, temperature, liquid water content (amount of liquid water in a given volume of air) and droplet size distribution (conventionally known as the median volume diameter). The major effects of *atmospheric icing* on structure are the static ice loads, wind action on iced structure and dynamic effects.

Generally an icing event is defined as period of the time when the temperature is below 0 °C and the

relative humidity is above 95 %. Ice accretion can be defined as, *any process of ice build up and snow accretion on the surface of objects exposed to the atmosphere* [1]. Atmospheric icing is traditionally classified according to two different processes (see Fig. 1.), which are [1]:

- i. Precipitation icing;
- ii. In-cloud icing.

Fig. 2 shows the type of accreted ice as a function of wind speed and temperature. In this figure, the curve shifts to the left with the increasing liquid water content and with decreasing object size. A classification of atmospheric ice is shown in Table 1.

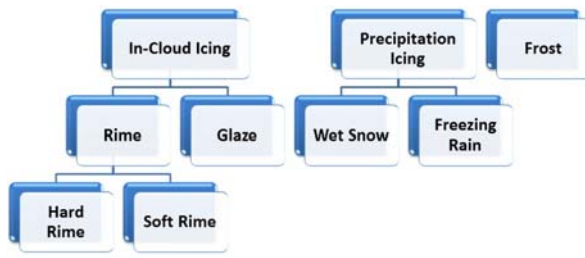


Fig. 1. Ice Types [1].

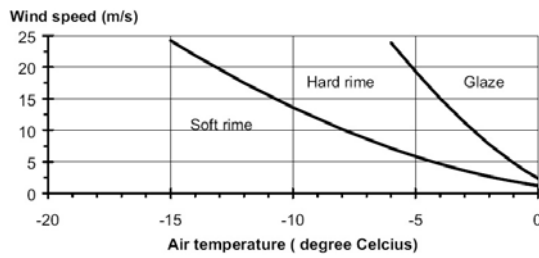


Fig. 2. Atmospheric ice as a function of wind speed and ambient temperature [1].

Table 1. Typical Properties of Accreted Atmospheric Ice [1].

Type of ice	Density (kg/m <sup>3</sup> )	General Appearance	
		Color	Shape
Glaze	900	Transparent	Evenly distributed / icicles
Wet Snow	300-600	White	Evenly distributed / eccentric
Hard Rime	600-900	Opaque	Eccentric, pointing windward
Soft Rime	200-600	White	Eccentric, pointing windward

## 1.2. Atmospheric Icing Sensors

A robust technique to detect icing and ice accretion rates has not yet been reported in the published literature. It is a challenging task to devise a measurement technique that can deal with both rime and glaze icing and can measure icing rate, load and duration without being affected by the icing event. Currently, all the ice detectors available are capable of measuring either one or both phenomenon such as detecting the icing event and measuring the rate of icing. As ice sensors can be integrated with ice mitigation systems, it is important for these sensors to deliver the necessary information timely enough so as to be able to operate anti-icing and de-icing mitigation strategies effectively. To distinguish between snow and ice can be considered to be an important factor for the determination of deicing power requirements. Hence, measurement of an icing event or related phenomena bounds a set of requirements which include the ability of a sensor/probe to detect icing with high sensitivity

without being influenced by the icing incident. Icing measurement techniques can be classified into direct and indirect methods as follows:

### 1.2.1. Indirect Methods

The indirect methods of ice detection involve measuring weather conditions such as humidity, and temperature that lead to icing or detecting the effects of icing, for example, reduction in the power generated by the wind turbine, reduction in the speed of anemometers or measuring the variables that cause icing or variables that correlate with the occurrence of icing, such as cloud height and visibility [2]. Empirical or deterministic models are then used to determine when icing is occurring. Also Homola et. al. [3] have outlined five indirect measurement methods. The reduction in the speeds of anemometers method of Craig and Craig [4] and the noise generation frequency method of Seifert [5] are typical examples of indirect methods.

### 1.2.2. Direct Methods

The direct methods of ice and snow detection are based on the principle of detecting property changes caused by accretion such as mass, dielectric constants, conductivities, or inductance. Although Homola et. al. [3] outlined twenty four direct measurement methods but they still need to be more categorized for further exploration. For more details on all of these categories see [6]. The categorization of these direct methods can be:

- Capacitive techniques;
- Microwave techniques;
- Inductance techniques;
- Ultrasonic techniques;
- Acoustic techniques;
- Infrared techniques;
- Resonance techniques.

## 2. Capacitive Sensing Technique - In General

From the above categories, the capacitive technique is the main focus of this review. The capacitance depends on the geometrical arrangement of the conductors and on the dielectric material between them,  $C=C(\epsilon, G)$ . For example, for a capacitor formed by  $n$  equal parallel plane plates having a geometry  $G$  depending upon area  $A$ , with a distance  $d$  between each pair, and an interposed material with a relative dielectric constant  $\epsilon_r$ , the capacitance is

$$C = \epsilon_0 \epsilon_r \frac{A}{d} (n-1), \quad (1)$$

where  $\epsilon_0 = 8.85 \text{ pF/m}$  is the dielectric constant for vacuum. Therefore, any quantity producing a variation in  $\epsilon_r$ ,  $A$ , or  $d$  will result in the change in the capacitance  $C$  and can be in principle sensed by that device.

## 2.1. Dielectric Constant from Electronic Polarization

The electron orbiting a nucleus is like a harmonic oscillation with a natural frequency  $\omega_0$  mentioned in Kao [7]. The dynamic equation can be defined as,

$$m \frac{d^2 \Delta x}{dt^2} = -\gamma \Delta x - ZqF_{loc}, \quad (2)$$

where  $\Delta x$  is the electrons displacement,  $m$  is the electron mass,  $q$  is the electronic charge,  $Z$  is the number electrons involved,  $F_{loc}$  is the local field acting on the atoms, and  $\gamma$  is the force constant. Also the natural oscillation frequency is given as,  $\omega_0 = \sqrt{\gamma/m}$

The oscillating electron is equivalent to an electric dipole and would radiate energy according to electromagnetic theory of radiation. This energy can be taken as a damping mechanism and  $\beta dx/dt$  is a retarding force, hence our dynamic equation is,

$$m \frac{d^2 \Delta x}{dt^2} + m\omega_0^2 \Delta x = -\beta \frac{dx}{dt} - ZqF_{loc} \quad (3)$$

From Bohr's Model, we have the potential of electron given as,

$$E = \hbar \omega_0 = \frac{mq^4}{(4\pi\epsilon_0)^2 \hbar^2} \quad (4)$$

where  $\hbar = h/2\pi$  and  $h$  is the Plank's constant. Also when  $Z=1$  we have electronic polarization,  $\alpha_e = 4\pi\epsilon_0 R^3$  where  $R$  is the radius of the ground state orbit of Bohr's atom. Similarly, electronic susceptibility and dielectric constant is given as,

$$\begin{aligned} \chi_e &= \frac{N\alpha_e}{\epsilon_0} = \frac{N}{\epsilon_0} \left[ \frac{(Zq)^2}{m\omega_0^2} \right] \\ \epsilon_r &= 1 + \chi_e = 1 + \frac{N}{\epsilon_0} \left[ \frac{(Zq)^2}{m\omega_0^2} \right] \end{aligned} \quad (5)$$

## 2.2. Complex Dielectric Constant

When a time varying electric field is applied across a parallel plate capacitor with the plate area of one unit and a separation of  $d$  between the plates, then the total current is given by:

$$J_T = J + \frac{dD}{dt} = J + \epsilon^* \frac{dF}{dt}, \quad (6)$$

where  $J$  is the conduction current and  $\epsilon^*$  is the complex permittivity which is introduced to allow for dielectric losses due to friction accompanying polarization and orientation of electric dipoles. Mathematically,

$$\epsilon^* = \epsilon' - j\epsilon'' = (\epsilon'_r - j\epsilon''_r)\epsilon_0, \quad (7)$$

where  $\epsilon'_r$  is the dielectric storage constant and  $\epsilon''_r$  is the dielectric loss factor. Similarly loss tangent is defined as,  $\tan \delta = \epsilon''_r / \epsilon'_r$  where  $\delta$  is the loss angle.

We can use the instantaneous energy absorbed per second per cubic centimeter is given by  $J_T(t)F(t)$ . Thus, on average, the amount of energy per second per cubic centimeter absorbed by the material is

$$W = \omega \epsilon''_r \epsilon_0 F_m^2 / 2 \quad (8)$$

The discrete nature of matter, and the behavior and interaction of those particles, can be manifested through their response to time varying electric fields with wavelengths comparable the distances between the particles. To measure the dynamic response, we can use either use *time domain approach* or *frequency domain approach*. From the viewpoint of measuring techniques, the time domain approach is simpler than the frequency domain approach, but from the viewpoint of data analysis, the time domain approach is more complex. However, both approaches should be intimately connected and should yield, in principle, the same results.

### 2.2.1. Time Domain Approach

In this we measure the time dependent polarization immediately after the application of a step function electric field or we measure the decay of the polarization from an initial steady state value to zero after the sudden removal of an initial polarizing field. This decay is generally referred to as *dielectric relaxation*. This approach provides conspicuous information about the nonlinearity of the dielectric behavior simply by varying the amplitude of the applied step function held. Experimental arrangement for the measurements of the time domain response (i.e., the transient charging or discharging current, resulting from the application or the removal of a step DC voltage) is given in Fig. 3.

In this circuit, the switch  $S_1$  has 2 positions: one for turning on the step DC voltage to start the flow of charging current, the other for short circuiting the specimen to allow the discharging current to flow after the specimen has been fully charged to a steady state level. The switch  $S_2$  is used to short circuit  $R_1$  to provide a path for surge currents for a very short



period of time to protect the circuit; it also gives a chance to adjust the amplifier to a null position before recording the transient current. It is important to make the time constant of the amplifier which depends on the stray capacitance in shunt with  $R_1$ , much smaller than the time during which the transient current is flowing. The specimen has the guard and the guarded electrodes, the outer guard electrode being connected to ground to eliminate surface leakage currents from the specimen. The charging or discharging current is measured as a voltage appearing across  $R_1$  by means of a DC amplifier. The voltage drop from point A to ground is made zero by a negative feedback in the amplifier circuit, which produces a voltage across  $R_2$  equal and opposite to that across  $R_1$  thus making the applied step voltage across the specimen only. The step voltage and the charging and discharging current as a function of time are also shown in Fig. 4 in which  $I_0$  is the steady DC component of the charging current and the width of the step voltage is 63 seconds.

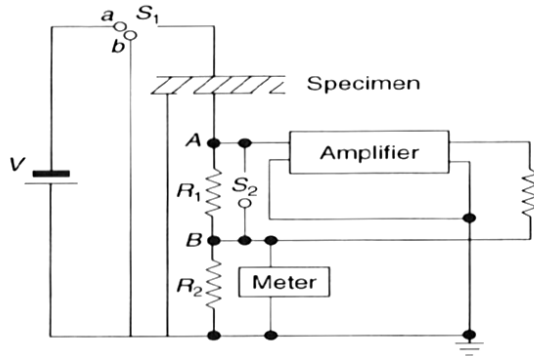


Fig. 3. Experimental arrangement for measuring relaxation time [7].

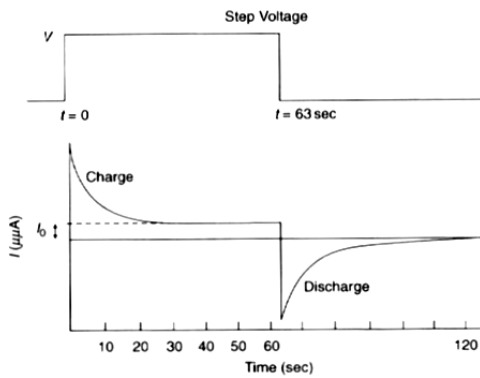


Fig. 4. Step voltage input and current output [7].

### 2.2.2. Frequency Domain Approach

We mainly measure the dielectric constant at various frequencies of alternating excitation fields. No material is free of dielectric losses and therefore no material is free of absorption and dispersion which

reflects that no material is frequency independent  $\epsilon_r'$  and  $\epsilon_r''$ . Now, using Debye Equations for a varying electric field  $F_m e^{j\omega t}$  we have the relationships as:

$$\epsilon_r' = \epsilon_{r\infty} + \frac{\epsilon_{rs} - \epsilon_{r\infty}}{1 + \omega^2 \tau_0^2} \quad (9)$$

$$\epsilon_r'' = \frac{(\epsilon_{rs} - \epsilon_{r\infty}) \omega \tau_0}{1 + \omega^2 \tau_0^2} \quad (10)$$

$$\tan \delta = \epsilon_r'' / \epsilon_r' = \frac{(\epsilon_{rs} - \epsilon_{r\infty}) \omega \tau_0}{\epsilon_{rs} + \epsilon_{r\infty} \omega^2 \tau_0^2} \quad (11)$$

From Eq.(s) 10 and 11 we get the parametric equations of circle in  $\epsilon_r' - \epsilon_r''$ , given as:

$$\frac{\epsilon_r' - \epsilon_{r\infty}}{\epsilon_{rs} - \epsilon_{r\infty}} = \frac{1}{1 + \omega^2 \tau_0^2} \quad (12)$$

$$\frac{\epsilon_r''}{\epsilon_{rs} - \epsilon_{r\infty}} = \frac{\omega \tau_0}{1 + \omega^2 \tau_0^2}$$

By eliminating  $\omega \tau$  from eq. 12 we obtain,

$$\left( \epsilon_r' - \frac{\epsilon_{rs} + \epsilon_{r\infty}}{2} \right)^2 + \epsilon_r''^2 = \left( \frac{\epsilon_{rs} - \epsilon_{r\infty}}{2} \right)^2 \quad (13)$$

The circle of Eq. 13 over which  $\epsilon_r''$  is positive has physical significance (a semicircle). This complex plot of  $\epsilon_r' - \epsilon_r''$  defined as Argand diagram is shown in Fig. 6 in which frequency is not explicitly shown. The variation of  $\epsilon_r'$  and  $\epsilon_r''$  due to the variation of  $\omega$  is shown in Fig. 5 which illustrates schematically the typical dispersion behavior for polarization in the relaxation regime. For simplicity, Eq.(s) 9, 10 and 11 are based on the following assumptions: the local field is the same as the applied field  $F$ ; the conductivity of the materials is negligible; all dipoles have only one identical relaxation time  $\tau_0$ . For more insight into Debye Equations for atmospheric ice and various forms see Mughal et. al. [8].

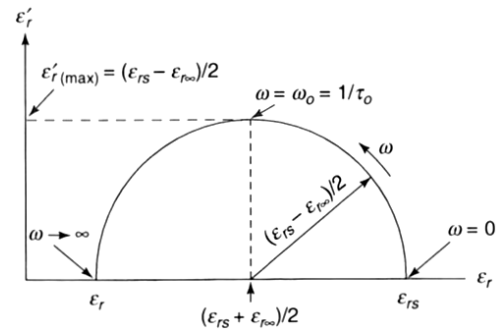


Fig. 5. Argand Diagram  $\epsilon_r' - \epsilon_r''$ .

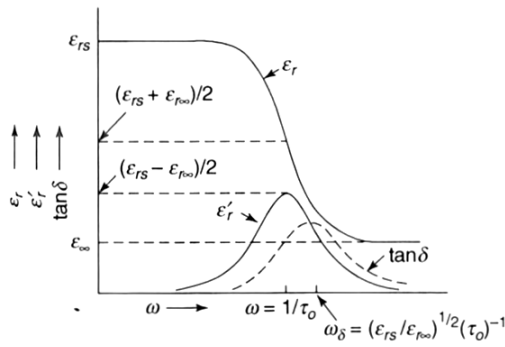


Fig. 6. Variation of  $\epsilon_r'$ ,  $\epsilon_r''$ ,  $\delta$  as a function of  $\omega$ .

### 3. Capacitive Atmospheric Icing Sensors

Capacitive ice sensors generate an electric field to detect the presence of dielectric materials. Such electric field radiates outward around the probe and a dielectric material in close proximity of the field affects the measured capacitance, Mughal et. al. [6]. This attribute enables non-invasive measurements. In Sihvola et. al. [9], the results indicate that the complex dielectric constant is practically independent of the structure of snow. It is also mentioned that for dry snow, the dielectric constant is determined by the density and for wet snow, the imaginary part and the increase of the real part due to liquid water have the same volumetric wetness dependence. The static dielectric constants  $\epsilon_{rs}$  of both polycrystalline and single crystals of ice have been carefully determined Auty [10]. Also, application electrical properties to the measurement of ice thickness, temperature, crystal orientations are presented in Evanes [11]. Weinstein [12], Kwadwo [13] and Jarvinen [14] proposed three different capacitive based ice detection methods, which are discussed in the following sections.

#### 3.1. Capacitive Ice Sensor by Weinstein

This ice sensor proposed by Weinstein [12] as given in Fig. 7 can be used for the determination of the thickness of ice (22) on the outer surface (12) of an object independent of the temperature and the composition of the ice (22). First capacitive gauge (16), second capacitive gauge (18), and the temperature gauge (20) are embedded in embedding material (14) located within a hollow portion of outer surface (12). First capacitive gauge (16), second capacitive gauge (18), and temperature gauge (20) are respectively connected to first capacitance measurement circuit (24), second capacitance measurement circuit (26), and temperature measuring circuit (28). The geometry of first and second capacitive gauge s (16) and (18) is such that the ratio of voltage outputs of first and second capacitive gauge s (24) and (26) is proportional to the thickness of ice (22), regardless of ice temperature or

composition. This ratio is determined by offset and dividing circuit (29).

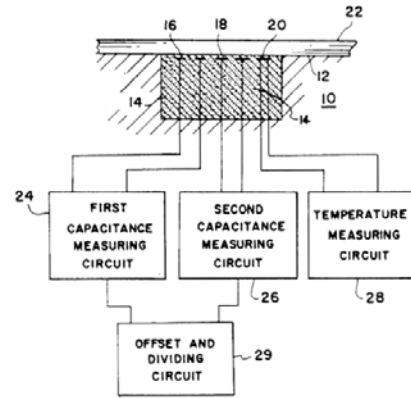


Fig. 7. Construction of Weinstein Ice Sensor.

In this sensor both first (16) and second capacitive gauge (18) are made from thin conductors with a thickness of approximately 0.001 of an inch. The first capacitive gauge (16) is connected to first capacitance measuring circuit (24) and second capacitive gauge (18) is connected to second capacitance measuring circuit (26) shown in Fig. 8. A dual timer LM556 (42), is used in an unstable mode to generate 7μs pulses at 1.5 kHz, for example, or pulses at any other similar frequencies, which are used to trigger a monostable timer (44). The timing capacitor of monostable timer (44) is gauge 16. The output from the monostable timer is converted by the low pass filter (46) to produce an output DC signal which is directly proportional to the capacitance of first capacitive gauge (16). First capacitance measuring circuit (24) and second capacitance measuring circuit (26) are connected to offset the dividing circuit (29). The output voltage  $V_{out}$  of this offset and dividing circuit (29) for ice conditions is determined by the relation,

$$V_{out} = \frac{(V - V_o)_2}{(V - V_o)_1}, \quad (14)$$

where  $V$  is the voltage output for the ice conditions and  $V_o$  is the initial voltage for no ice conditions. Subscripts (1) and (2) refer respectively to capacitive measurements from first capacitance measuring circuit (24) and second capacitance measurement circuit (26).  $V_{out}$  is independent of both temperature and ice decomposition since both effects results in identical scaling factors [15] resulting no changes in Eq.(s) 14. The variation of capacitance as a function of thickness is shown in Fig. 9.

In Fig. 9 output voltages from first and second capacitive measuring circuits (24) and (26) for various thickness of ice (22) formed on the outer surface (12) is shown. Curve (48) represents the output voltage  $V_1$  from the first capacitance

measuring circuit (24) at a fixed temperature and ice impurity level. Also curve (50) represents the voltage output  $V_2$  from the second capacitance measuring circuit (26). At a fixed configuration, both curves will vary with temperature change or ice impurity change. Also it can be seen that both curves do not go to zero output voltage even when the ice thickness is zero.

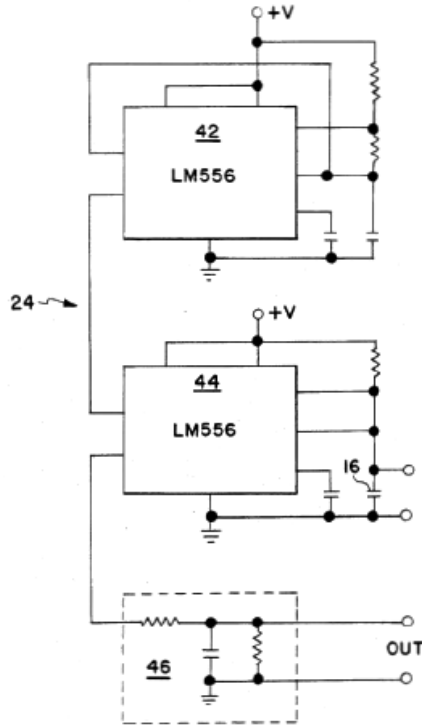


Fig. 8. Electrical schematic diagram of capacitance measuring circuit.

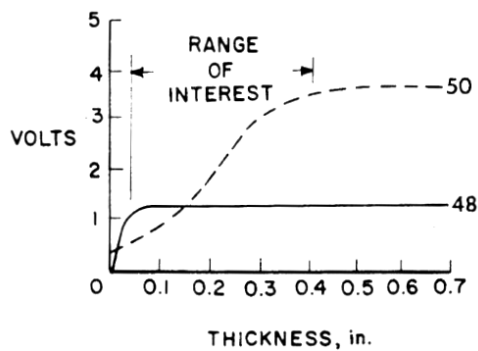


Fig. 9. Ratio of capacitance gauge as a function of thickness.

### 3.2. Atmospheric Icing Sensor by Kwadwo

Kwadwo [13] has used two-cylinder probes to act as a capacitive ice sensor, based on the principle that as ice accretes on two electrically charged parallel-arranged cylindrical probes, the measured capacitance increases, while the resistance decreases. As the super cooled water droplets collide with the cylindrical probes and stick on the surface, they

freeze and ice begins to grow as shown in Fig. 11. The accreted ice affects the electric field generated by the electrically charged cylindrical probes resulting in an increase in the capacitance. At locations further from the inner region, i.e. along the circumference of the cylinders, the electric field lines are non-uniformly distributed, bulging out (instead of been parallel to each other), as one move away from the inner region. This non-uniformity of the electric field lines in these regions leads to a reduction in the electric field strength. This is known as fringing, which leads to decrease in capacitance. The electric field originating from the polarization charges on the surface of the ice partly shields the external electric field generated by the charged cylindrical probes leading to a reduction in the overall electric field. The overall voltage decreases simultaneously, because the electric field is directly proportional to the voltage. The resistance between the cylindrical probes is large at the start of the icing event because of the air gap between the cylinders. However, as ice builds up on the cylindrical probes, the air gap between the cylindrical probes decreases and the resistance begins to decrease exponentially. The rate of decrease is sensitive to the presence of water on the surface of the ice formed on the cylindrical probes and this phenomenon is used to distinguish between different types of ice.

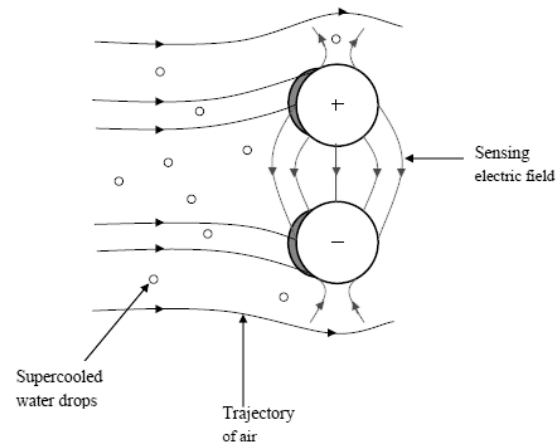


Fig. 10. Trajectory of supercooled water drops and air moving towards two cylindrical probes.




Fig. 11. Ice formation at the windward side of the cylindrical probes.

### 3.3. Atmospheric Icing Sensor by Jarvinen

In this sensor, Jarvinen [14] used the method for detecting the presence and the accretion of ice by first measuring the properties of the contaminant layer overlying the ice sensor. The contaminant layer's temperature, thermal conductivity and variation of total impedance versus ice sensor electrical excitation frequency are measured. The complex dielectric property subsystem monitors the dielectric property locus in dielectric space as the excitation frequency is varied from near dc to higher frequencies (using Cole-Cole plot) and compares the measured results for magnitude and shape with laboratory property data taken at the same temperature and stored in the processor. It doubles checks using external ice (based upon the complex dielectric measurements) sensor whether it is ice or rain water or deicing fluid or snow. If the measured results form a semicircular shaped locus of dielectric properties in complex dielectric space during the frequency scan and those measurements are also determined to be in agreement with on board stored laboratory ice data, ice is confirmed to be present. The presence of ice is also confirmed if a particular vector can be constructed from the measured data taken at a single preselected excitation frequency and found to have a vector angle in agreement with the vector angle from stored laboratory results taken at the same measurement conditions. In addition, complex dielectric measurement algorithms identify whether cracks, flaws or voids or increased electrical conductivity exist in the ice covering and sensor from their effects on the shape and size of the measured complex dielectric locus or from the length of the vector at the pre selected frequency. The presence of flaws, cracks or voids or enhanced electrical conductivity are determined from the values for the low frequency and high frequency intercepts and the value for diameter of the complex dielectric locus if these values are found to differ from those calculated for ice based on stored ice data. These differences, if found to exist, are used to correct the initially chosen ice thickness value based on the assumption of normal ice: ice with no flaws, cracks or voids or higher electrical conductivity, see Fig. 12. For more details on the mathematical principle of this type of sensing technique see Mugal et. al. [8].

Pure glaze ice in the temperature range from 0 to -40 °C has a thermal conductivity value in the range 2.4 to 2.6 W/mK, rain water slightly above 0 °C has a value of 0.6 W/mK in the same units, air 0.023 W/mK and a 50/50 mixture of deicing fluid is 0.41 W/mK. The thermal conductivity of rime ice (density 0.38 gm/cm<sup>3</sup>) has a thermal conductivity of 0.4 W/mK. Thus the presence of glaze ice is easily determined by the substantial difference in thermal conductivity between it and all other possible contaminants. More details about this can be found in [15]. Dielectric values are used in addition to discriminate between rain water, deicing fluid and low density rime ice.

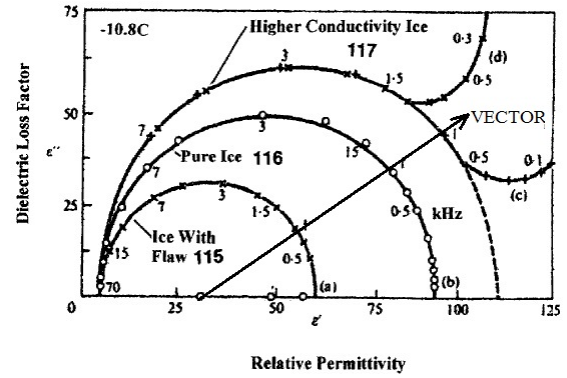


Fig. 12. Cole-Cole plot for pure ice, ice with flaw and ice with higher conductivity value [14].

Also this sensor uses AD5933 high precision impedance converter system that combines an on board frequency generator with a 12 bit, 1 MSPS, ADC. The frequency generator allows an external complex impedance to be excited with a known frequency. The response signal from the impedance is sampled by the on board ADC and a discrete Fourier transform is processed by an on board DSP engine. The DFT algorithm returns a real and imaginary data word at each output frequency. AD5933 chip measures total impedance magnitudes over the range from 100 Ω to 10 MΩ with a total system accuracy of 0.5 %. The sweep frequency range of the chip normally covers the range from 1 kHz to 100 kHz. However by adding a clock dividing circuit we can lower the range to 10 Hz to 20 kHz. For this sensor this range is 40 Hz to 40 kHz.

#### 3.3.1. From Impedance to Dielectric

It is explained in [16] that ice can may be replaced by an equivalent circuit as shown in Fig. 12. The total complex impedance  $Z$  of the circuit is given by

$$\frac{1}{Z} = \frac{1}{R_o} + \frac{1}{R_1 + \frac{1}{j\omega C_1}} + j\omega C_\infty \quad (15)$$

Now if the ice is characterized by a capacitance  $C$ , then

$$\frac{1}{Z_c} = j\omega C = \frac{j\omega A \epsilon_o \epsilon_r}{L} \quad (16)$$

where  $L$  is the thickness of ice,  $A$  is the surface area of block of ice and  $\epsilon_o$  is the permittivity of free space. Also we can write

$$\epsilon_{rs} = \frac{L}{\epsilon_o A} (C_1 + C_\infty) \quad (17)$$

$$\epsilon_{r\infty} = \frac{LC_\infty}{\epsilon_o A}$$

which is when substituted in eq. 16 then we have

$$\varepsilon_r = \frac{LC_1}{\varepsilon_0 A(1 + j\omega\tau)} + \frac{LC_\infty}{\varepsilon_0 A}, \quad (18)$$

where  $\tau = R_I C_I$  is the dielectric relaxation time of the circuit that is time taken for the voltage across the ice block to reach  $1 - e^{-1} = 0.63$  of its final value when a step voltage is applied. Similarly we can also write the complex permittivity as

$$\begin{aligned} \varepsilon' &= \frac{L}{\varepsilon_0 A} \left( \frac{C_1}{1 + \omega^2 \tau^2} + C_\infty \right) \\ \varepsilon'' &= \frac{L}{\varepsilon_0 A} \left( \frac{\omega \tau C_1}{1 + \omega^2 \tau^2} \right) \end{aligned} \quad (19)$$

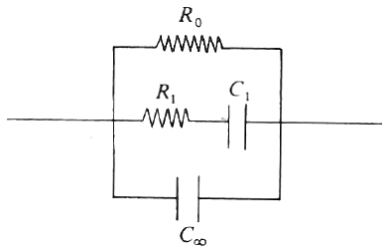


Fig. 13. Equivalent circuit for ice [16].

### 3.3.2. How to Measure Thickness

In operation the ice detection system knowing the type of ice from impedance, thermal conductivity and or dielectric measurements, then takes the measured impedance value and converts it to a thickness after interpolation to the measured local temperature should that temperature not be an exact temperature match with the look up data. The contaminants layer temperature, thermal conductivity and variation of total impedance versus ice sensor electrical excitation frequency are measured and the total impedance data is also converted to show the complex dielectric properties of the overlying layer. The measured properties and the complex dielectric properties are then used first to differentiate between ice, rain water, deicer fluid or snow overlying the ice sensor and then used to differentiate between glaze and rime ice by comparing the results with laboratory measured ice data stored in computer memory collocated with the ice sensor. The presence of ice is confirmed by a measured thermal conductivity value in agreement with that of ice and also confirmed if its complex dielectric locus exhibits a semicircular shape with values for the diameter of the complex dielectric locus and for its low frequency and high frequency intercepts with the ordinary relative permittivity axis in near agreement with similar results calculated from the stored laboratory measured ice data. A second possible simplified means for confirming the presence of ice is also

provided based on demonstrating that the magnitude and angular inclination of a vector from a point on the ordinary relative permittivity axis near the high frequency end of the complex dielectric locus, the vector starting near the locus.

## 4. Conclusion and Future Work

The mere existence of a permanent dipole moment in water provides structural information about the molecule. It is found that the dielectric variations in different types of ice can be very effective in finding the parameters such as ice type, ice thickness and icing rate. The patent of Jaravinen [14] can be considered as a benchmark as it is able to sense all the above parameters, hence the direct approach mentioned by Homola et. al. [3] is able to deliver maximum information. Also due to the variation in response of ice and snow by varying the electrical field; the application of Cole-Cole Diagram for complex dielectric constant of snow and ice is adequately proved. A simulation study [17] and analytical study [8] on the capacitive variations of atmospheric ice is carried out to compare the numerical and theoretical results with the experimental variations. These results can further be utilized/validated for the determination of atmospheric ice type and measurement of its rate and thickness. A hybrid measurement technique may also be considered in future for robust results.

## Acknowledgements

The work reported in this paper was partially funded by the Research Council of Norway, project no. 195153/160 and partially by the consortium of the ColdTech project - Sustainable Cold Climate Technology. Also I appreciate the support of Norwegian PhD Network on Nanotechnology for Microsystems, contract no. 190086/S10 for their financial and technical support.

## References

- [1]. Foder, M. H. ISO 12494 - Atmospheric icing on structures and how to use it, in *Proceedings of the 11<sup>th</sup> International Offshore and Polar Engineering Conference*, Norway, 2001.
- [2]. Fikke, S., Atmospheric icing on structures, measurement and data collection on icing, state of the art, *MeteoSwiss*, 2006, p. 110.
- [3]. Homola, M. C., P. J. Nicklasson, and P. A. Sundsbo, Ice sensors for wind turbines, *Cold Regions Science and Technology*, 2006, 46, p. 125-131.
- [4]. Craig, D. F. and D. B. Craig, An investigation of icing events on hacket hill, in *Proceedings of the Boreas III Conference*, Finland, 1995.
- [5]. Seifert, H., Technical requirements for rotor blades operating in cold climates, in *Proceedings of the Boreas II Conference*, Pyhatunturi, Finland, 2003.



- [6]. Mughal, U. N. and M. S. Virk, Review of Atmospheric Icing Sensors.
- [7]. Kao, K. C., Dielectric phenomena in solids, *Academic Press*, 1 edition (March 25, 2004).
- [8]. Mughal, U. N., M. S. Virk, and M. Y. Mustafa, Dielectric based sensing of atmospheric ice, in *Proceedings of the 38<sup>th</sup> International Conference on Application of Mathematics in Engineering and Economics*, Sozopol, Bulgaria, AIP, 2012.
- [9]. Sihvola, A., E. Nyfors, and M. Tiuri, Mixing formulae and experimental results for the dielectric constant of snow, *Journal of Glaciology*, 31, 108, 1985, pp.163-170.
- [10]. Auty, R. P., Dielectric Constants of Solid H<sub>2</sub>O and D<sub>2</sub>O, *Brown University*, 1951.
- [11]. Evans, S., Dielectric properties of ice and snow - a review, *Journal of Glaciology*, 5, 1965, pp. 773-792.
- [12]. Weinstein, L. M., Ice Sensor, US Patent No. 4766369, 1988.
- [13]. Owusu, K. P., Capacitive probe for ice detection and accretion rate measurement: proof of concept, *University of Manitoba*, Manitoba, 2010.
- [14]. Jarvinen, P. O., Total impedance and complex dielectric property ice detection system, 2008.
- [15]. Coles, W. D., Experimental determination of thermal conductivity of low density ice, *Technical Notes*, 3143, *Wash. DC NACA*, 1954.
- [16]. Hobbs, P. V., Ice Physics, *Oxford University Press*, 2010.
- [17]. Mughal, U. N. and M. S. Virk, A Numerical Comparison of Dielectric based Measurement of Atmospheric Ice Using Comsol, in *Comsol Multiphysics*, Milan, Italy, 2012.

2013 Copyright ©, International Frequency Sensor Association (IFSA). All rights reserved.  
(<http://www.sensorsportal.com>)



**Easy and quick  
sensors systems development**

**Evaluation Kit CD  
EVAL UFDC-1/UFDC-1M-16**

International Frequency  
Sensor Association  
**IFSA**

OPTYS Corporation  
**OPTYS  
CORPORATION**

- 16 measuring modes
- Frequency range from 0.05 Hz up to 7.5 MHz (120 MHz)
- Programmable accuracy from 1 % up to 0.001 %
- RS232 (USB optional)

[sales@sensorsportal.com](mailto:sales@sensorsportal.com)  
[http://www.sensorsportal.com/HTML/E-SHOP/PRODUCTS\\_4/Evaluation\\_board.htm](http://www.sensorsportal.com/HTML/E-SHOP/PRODUCTS_4/Evaluation_board.htm)

# Conference Announcement



## Topic E2: Transportation & Mobility

The Euromat conference series, organised by the Federation of European Materials Societies (FEMS), is one of the largest events of its kind in Europe, covering the full width of materials science and technology. We would like to direct your attention to the following Symposia which are focussing specifically on transport applications:

- E2.I: Modeling, simulation, optimization of materials and structures in transportation**  
Prof. Kambiz Kayvantash, Société CADLM, Massy (F)
- E2.II: Intelligent and adaptive materials and structures**  
Dr.-Ing. Dirk Lehmhus, ISIS Sensorial Materials Scientific Centre, Bremen (D)
- E2.III: Energy absorbing and protective materials and structures**  
Prof. Massimiliano Avallè, Politecnico di Torino, Torino (I)
- E2.IV: Production, properties and applications of hybrid materials and structures**  
Dr.-Ing. Kai Schimanski, Foundation Institut für Werkstofftechnik (IWT), Bremen (D)

**DEADLINE CALL FOR PAPERS END OF JANUARY –  
WATCH OUT FOR DETAILS AT [www.euromat2013.fems.eu](http://www.euromat2013.fems.eu)  
OR CONTACT**

### ISIS Sensorial Materials Scientific Centre, University of Bremen

Board of Directors  
Prof. Dr.-Ing M. Busse  
Prof. Dr. W. Lang  
Prof. Dr.-Ing. H.-W. Zoch

Managing Director  
Dr.-Ing. Dirk Lehmhus

Wiener Straße 12  
28357 Bremen

Fon +49 (0)421 5665 408  
Fax +49 (0)421 5665 499

[dirk.lehmhus@uni-bremen.de](mailto:dirk.lehmhus@uni-bremen.de)  
[www.isis.uni-bremen.de](http://www.isis.uni-bremen.de)

## Aims and Scope

*Sensors & Transducers* is a peer reviewed international, interdisciplinary journal that provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes original research articles, timely state-of-the-art reviews and application specific articles with the following devices areas:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing and interfacing;
- Frequency (period, duty-cycle)-to-code converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

Further information on this journal is available from the Publisher's web site:

<http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

## Subscriptions

An annual subscription includes 12 regular issues and some special issues. Annual subscription rates for 2013 are the following:

Electronic version (in printable pdf format): 400.00 EUR

Printed with b/w illustrations: 640.00 EUR

Printed full color version: 760.00 EUR

40 % discount is available for IFSA Members.

Prices include shipping costs by mail. Further information about subscription is available through IFSA Publishing's web site: [http://www.sensorsportal.com/HTML/DIGEST/Journal\\_Subscription.htm](http://www.sensorsportal.com/HTML/DIGEST/Journal_Subscription.htm)

## Advertising Information

If you are interested in advertising or other commercial opportunities please e-mail [sales@sensorsportal.com](mailto:sales@sensorsportal.com) and your enquiry will be passed to the correct person who will respond to you within 24 hours. Please download also our Media Planner 2013: [http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2012.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2012.pdf)

## Books for Review

Publications should be sent to the IFSA Publishing Office: Ronda de Ramon Otero Pedrayo, 42C, 1-5, 08860, Castelldefels, Barcelona, Spain.

## Abstracting Services

This journal is cited, indexed and abstracted by Chemical Abstracts, EBSCO Publishing, IndexCopernicus Journals Master List, ProQuest Science Journals, CAS Source Index (CASSI), Ulrich's Periodicals Directory, Scirus, Google Scholar, etc. Since 2011 *Sensors & Transducers* journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in *Elsevier* products.


## Instructions for Authors

Please visit the journal web page <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions very carefully when submitting their manuscripts. Manuscript must be send electronically in both: MS Word 2003 for Windows (doc) and Acrobat (pdf) formats by e-mail: [editor@sensorsportal.com](mailto:editor@sensorsportal.com)



**ADVANCES IN SENSORS:  
REVIEWS****1****Sergey Y. Yurish**  
Editor

# Modern Sensors, Transducers and Sensor Networks

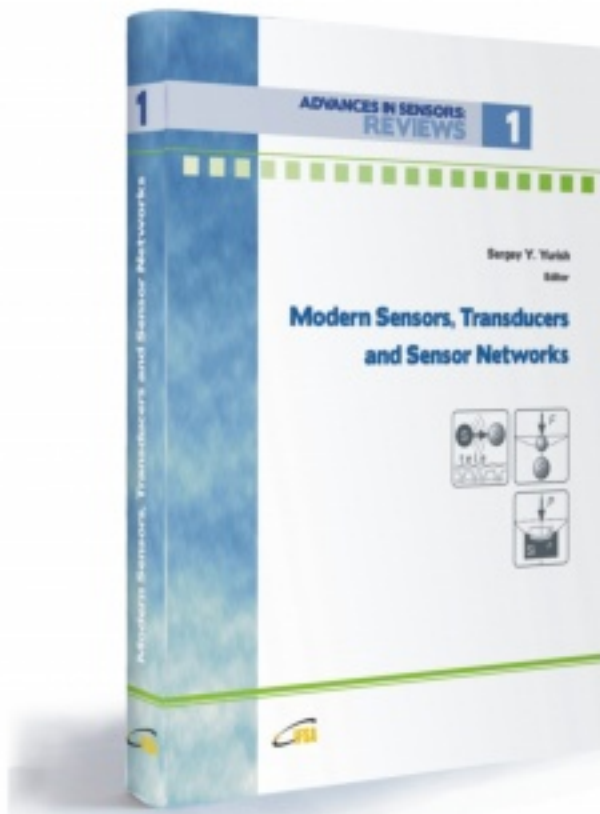

*Modern Sensors, Transducers and Sensor Networks* is the first book from the Advances in Sensors: Reviews book Series contains dozen collected sensor related state-of-the-art reviews written by 31 internationally recognized experts from academia and industry.

Built upon the series Advances in Sensors: Reviews - a premier sensor review source, the *Modern Sensors, Transducers and Sensor Networks* presents an overview of highlights in the field. Coverage includes current developments in sensing nanomaterials, technologies, MEMS sensor design, synthesis, modeling and applications of sensors, transducers and wireless sensor networks, signal detection and advanced signal processing, as well as new sensing principles and methods of measurements.

*Modern Sensors, Transducers and Sensor Networks* is intended for anyone who wants to cover a comprehensive range of topics in the field of sensors paradigms and developments. It provides guidance for technology solution developers from academia, research institutions, and industry, providing them with a broader perspective of sensor science and industry.

Order online:

[http://sensorsportal.com/HTML/BOOKSTORE/Advance\\_in\\_Sensors.htm](http://sensorsportal.com/HTML/BOOKSTORE/Advance_in_Sensors.htm)



## [www.sensorsportal.com](http://www.sensorsportal.com)