

ISSN 1726-5479

# SENSORS & TRANSDUCERS

3<sup>vol. 14-2</sup>  
Special  
/12



## Physical and Chemical Sensors & Wireless Sensor Networks

International Frequency Sensor Association Publishing



**Editors-in-Chief:** Sergey Y. Yurish, tel.: +34 93 413 7941, e-mail: editor@sensorsportal.com

**Editors for Western Europe**

Meijer, Gerard C.M., Delft University of Technology, The Netherlands  
Ferrari, Vittorio, Università di Brescia, Italy

**Editor for Eastern Europe**

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

**Editors for North America**

Datskos, Panos G., Oak Ridge National Laboratory, USA  
Fabien, J. Josse, Marquette University, USA  
Katz, Evgeny, Clarkson University, USA

**Editor South America**

Costa-Felix, Rodrigo, Inmetro, Brazil

**Editor for Africa**

Maki K.Habib, American University in Cairo, Egypt

**Editor for Asia**

Ohyama, Shinji, Tokyo Institute of Technology, Japan

**Editor for Asia-Pacific**

Mukhopadhyay, Subhas, Massey University, New Zealand

## Editorial Advisory Board

- Abdul Rahim, Ruzairi, Universiti Teknologi, Malaysia  
Ahmad, Mohd Noor, Nothern University of Engineering, Malaysia  
Annamalai, Karthikeyan, National Institute of Advanced Industrial Science and Technology, Japan  
Arcega, Francisco, University of Zaragoza, Spain  
Arguel, Philippe, CNRS, France  
Ahn, Jae-Pyoung, Korea Institute of Science and Technology, Korea  
Arndt, Michael, Robert Bosch GmbH, Germany  
Ascoli, Giorgio, George Mason University, USA  
Atalay, Selcuk, Inonu University, Turkey  
Atghiaee, Ahmad, University of Tehran, Iran  
Augutis, Vyantas, Kaunas University of Technology, Lithuania  
Avachit, Patil Lalchand, North Maharashtra University, India  
Ayesh, Aladdin, De Montfort University, UK  
Azamimi, Azian binti Abdullah, Universiti Malaysia Perlis, Malaysia  
Bahreyni, Behraad, University of Manitoba, Canada  
Baliga, Shankar, B., General Monitors Transnational, USA  
Baoxian, Ye, Zhengzhou University, China  
Barford, Lee, Agilent Laboratories, USA  
Barlingay, Ravindra, RF Arrays Systems, India  
Basu, Sukumar, Jadavpur University, India  
Beck, Stephen, University of Sheffield, UK  
Ben Bouzid, Sihem, Institut National de Recherche Scientifique, Tunisia  
Benachaiba, Chellali, Universitaire de Bechar, Algeria  
Binnie, T. David, Napier University, UK  
Bischoff, Gerlinde, Inst. Analytical Chemistry, Germany  
Bodas, Dhananjay, IMTEK, Germany  
Borges Carval, Nuno, Universidade de Aveiro, Portugal  
Bouchikhi, Benachir, University Moulay Ismail, Morocco  
Bousbia-Salah, Mounir, University of Annaba, Algeria  
Bouvet, Marcel, CNRS – UPMC, France  
Brudzewski, Kazimierz, Warsaw University of Technology, Poland  
Cai, Chenxin, Nanjing Normal University, China  
Cai, Qingyun, Hunan University, China  
Calvo-Gallego, Jaime, Universidad de Salamanca, Spain  
Campanella, Luigi, University La Sapienza, Italy  
Carvalho, Vitor, Minho University, Portugal  
Cecelja, Franjo, Brunel University, London, UK  
Cerde Belmonte, Judith, Imperial College London, UK  
Chakrabarty, Chandan Kumar, Universiti Tenaga Nasional, Malaysia  
Chakravorty, Dipankar, Association for the Cultivation of Science, India  
Changhai, Ru, Harbin Engineering University, China  
Chaudhari, Gajanan, Shri Shivaji Science College, India  
Chavali, Murthy, N.I. Center for Higher Education, (N.I. University), India  
Chen, Jiming, Zhejiang University, China  
Chen, Rongshun, National Tsing Hua University, Taiwan  
Cheng, Kuo-Sheng, National Cheng Kung University, Taiwan  
Chiang, Jeffrey (Cheng-Ta), Industrial Technol. Research Institute, Taiwan  
Chiriac, Horia, National Institute of Research and Development, Romania  
Chowdhuri, Arijit, University of Delhi, India  
Chung, Wen-Yaw, Chung Yuan Christian University, Taiwan  
Corres, Jesus, Universidad Publica de Navarra, Spain  
Cortes, Camilo A., Universidad Nacional de Colombia, Colombia  
Courtois, Christian, Universite de Valenciennes, France  
Cusano, Andrea, University of Sannio, Italy  
D'Amico, Arnaldo, Università di Tor Vergata, Italy  
De Stefano, Luca, Institute for Microelectronics and Microsystem, Italy  
Deshmukh, Kiran, Shri Shivaji Mahavidyalaya, Barshi, India  
Dickert, Franz L., Vienna University, Austria  
Dieguez, Angel, University of Barcelona, Spain  
Dighavkar, C. G., M.G. Vidyamandir's L. V.H. College, India  
Dimitropoulos, Panos, University of Thessaly, Greece  
Ding, Jianning, Jiangsu Polytechnic University, China  
Djordjevich, Alexandar, City University of Hong Kong, Hong Kong  
Donato, Nicola, University of Messina, Italy  
Donato, Patricio, Universidad de Mar del Plata, Argentina  
Dong, Feng, Tianjin University, China  
Drljaca, Predrag, Instersema Sensoric SA, Switzerland  
Dubey, Venketesh, Bournemouth University, UK  
Enderle, Stefan, Univ.of Ulm and KTB Mechatronics GmbH, Germany  
Erdem, Gursan K. Arzum, Ege University, Turkey  
Erkmen, Aydan M., Middle East Technical University, Turkey  
Estelle, Patrice, Insa Rennes, France  
Estrada, Horacio, University of North Carolina, USA  
Faiz, Adil, INSA Lyon, France  
Fericean, Sorin, Balluff GmbH, Germany  
Fernandes, Joana M., University of Porto, Portugal  
Francioso, Luca, CNR-IMM Institute for Microelectronics and Microsystems, Italy  
Francis, Laurent, University Catholique de Louvain, Belgium  
Fu, Weiling, South-Western Hospital, Chongqing, China  
Gaura, Elena, Coventry University, UK  
Geng, Yanfeng, China University of Petroleum, China  
Gole, James, Georgia Institute of Technology, USA  
Gong, Hao, National University of Singapore, Singapore  
Gonzalez de la Rosa, Juan Jose, University of Cadiz, Spain  
Granel, Annette, Goteborg University, Sweden  
Graff, Mason, The University of Texas at Arlington, USA  
Guan, Shan, Eastman Kodak, USA  
Guillet, Bruno, University of Caen, France  
Guo, Zhen, New Jersey Institute of Technology, USA  
Gupta, Narendra Kumar, Napier University, UK  
Hadjiloucas, Sillas, The University of Reading, UK  
Haider, Mohammad R., Sonoma State University, USA  
Hashsham, Syed, Michigan State University, USA  
Hasni, Abdelhafid, Bechar University, Algeria  
Hernandez, Alvaro, University of Alcalá, Spain  
Hernandez, Wilmar, Universidad Politecnica de Madrid, Spain  
Homontcovschi, Dorel, SUNY Binghamton, USA  
Horstman, Tom, U.S. Automation Group, LLC, USA  
Hsiai, Tzung (John), University of Southern California, USA  
Huang, Jeng-Sheng, Chung Yuan Christian University, Taiwan  
Huang, Star, National Tsing Hua University, Taiwan  
Huang, Wei, PSG Design Center, USA  
Hui, David, University of New Orleans, USA  
Jaffrezic-Renault, Nicole, Ecole Centrale de Lyon, France  
James, Daniel, Griffith University, Australia  
Janting, Jakob, DELTA Danish Electronics, Denmark  
Jiang, Liudi, University of Southampton, UK  
Jiang, Wei, University of Virginia, USA  
Jiao, Zheng, Shanghai University, China  
John, Joachim, IMEC, Belgium  
Kalach, Andrew, Voronezh Institute of Ministry of Interior, Russia  
Kang, Moonho, Sunmoon University, Korea South  
Kaniusas, Eugenijus, Vienna University of Technology, Austria  
Katake, Anup, Texas A&M University, USA  
Kausel, Wilfried, University of Music, Vienna, Austria  
Kavasoglu, Nese, Mugla University, Turkey  
Ke, Cathy, Tyndall National Institute, Ireland  
Khelfaoui, Rachid, Université de Bechar, Algeria  
Khan, Asif, Aligarh Muslim University, Aligarh, India  
Kim, Min Young, Kyungpook National University, Korea South  
Ko, Sang Choon, Electronics. and Telecom. Research Inst., Korea South  
Kotulska, Malgorzata, Wroclaw University of Technology, Poland  
Kockar, Hakan, Balikesir University, Turkey

**Kong, Ing**, RMIT University, Australia  
**Kratz, Henrik**, Uppsala University, Sweden  
**Krishnamoorthy, Ganesh**, University of Texas at Austin, USA  
**Kumar, Arun**, University of Delaware, Newark, USA  
**Kumar, Subodh**, National Physical Laboratory, India  
**Kung, Chih-Hsien**, Chang-Jung Christian University, Taiwan  
**Lacnjevac, Caslav**, University of Belgrade, Serbia  
**Lay-Ekuakille, Aime**, University of Lecce, Italy  
**Lee, Jang Myung**, Pusan National University, Korea South  
**Lee, Jun Su**, Amkor Technology, Inc. South Korea  
**Lei, Hua**, National Starch and Chemical Company, USA  
**Li, Fengyuan (Thomas)**, Purdue University, USA  
**Li, Genxi**, Nanjing University, China  
**Li, Hui**, Shanghai Jiaotong University, China  
**Li, Xian-Fang**, Central South University, China  
**Li, Yuefa**, Wayne State University, USA  
**Liang, Yuanchang**, University of Washington, USA  
**Liawruangrath, Saisunee**, Chiang Mai University, Thailand  
**Liew, Kim Meow**, City University of Hong Kong, Hong Kong  
**Lin, Hermann**, National Kaohsiung University, Taiwan  
**Lin, Paul**, Cleveland State University, USA  
**Linderholm, Pontus**, EPFL - Microsystems Laboratory, Switzerland  
**Liu, Aihua**, University of Oklahoma, USA  
**Liu Changgeng**, Louisiana State University, USA  
**Liu, Cheng-Hsien**, National Tsing Hua University, Taiwan  
**Liu, Songqin**, Southeast University, China  
**Lodeiro, Carlos**, University of Vigo, Spain  
**Lorenzo, Maria Encarnacio**, Universidad Autonoma de Madrid, Spain  
**Lukaszewicz, Jerzy Pawel**, Nicholas Copernicus University, Poland  
**Ma, Zhanfang**, Northeast Normal University, China  
**Majstorovic, Vidosav**, University of Belgrade, Serbia  
**Malyshev, V.V.**, National Research Centre 'Kurchatov Institute', Russia  
**Marquez, Alfredo**, Centro de Investigacion en Materiales Avanzados, Mexico  
**Matay, Ladislav**, Slovak Academy of Sciences, Slovakia  
**Mathur, Prafull**, National Physical Laboratory, India  
**Maurya, D.K.**, Institute of Materials Research and Engineering, Singapore  
**Mekid, Samir**, University of Manchester, UK  
**Melnyk, Ivan**, Photon Control Inc., Canada  
**Mendes, Paulo**, University of Minho, Portugal  
**Mennell, Julie**, Northumbria University, UK  
**Mi, Bin**, Boston Scientific Corporation, USA  
**Minas, Graca**, University of Minho, Portugal  
**Moghavvemi, Mahmoud**, University of Malaya, Malaysia  
**Mohammadi, Mohammad-Reza**, University of Cambridge, UK  
**Molina Flores, Esteban**, Benemérita Universidad Autónoma de Puebla, Mexico  
**Moradi, Majid**, University of Kerman, Iran  
**Morello, Rosario**, University "Mediterranea" of Reggio Calabria, Italy  
**Mounir, Ben Ali**, University of Sousse, Tunisia  
**Mrad, Nezih**, Defence R&D, Canada  
**Mulla, Imtiaz Sirajuddin**, National Chemical Laboratory, Pune, India  
**Nabok, Aleksey**, Sheffield Hallam University, UK  
**Neelamegam, Periasamy**, Sastra Deemed University, India  
**Neshkova, Milka**, Bulgarian Academy of Sciences, Bulgaria  
**Oberhammer, Joachim**, Royal Institute of Technology, Sweden  
**Ould Lahoucine, Cherif**, University of Guelma, Algeria  
**Pamidighanta, Sayanu**, Bharat Electronics Limited (BEL), India  
**Pan, Jisheng**, Institute of Materials Research & Engineering, Singapore  
**Park, Joon-Shik**, Korea Electronics Technology Institute, Korea South  
**Penza, Michele**, ENEA C.R., Italy  
**Pereira, Jose Miguel**, Instituto Politecnico de Seteбал, Portugal  
**Petsev, Dimiter**, University of New Mexico, USA  
**Pogacnik, Lea**, University of Ljubljana, Slovenia  
**Post, Michael**, National Research Council, Canada  
**Prance, Robert**, University of Sussex, UK  
**Prasad, Ambika**, Gulbarga University, India  
**Prateepasen, Asa**, Kingmoungut's University of Technology, Thailand  
**Pugno, Nicola M.**, Politecnico di Torino, Italy  
**Pullini, Daniele**, Centro Ricerche FIAT, Italy  
**Pumera, Martin**, National Institute for Materials Science, Japan  
**Radhakrishnan, S.**, National Chemical Laboratory, Pune, India  
**Rajanna, K.**, Indian Institute of Science, India  
**Ramadan, Qasem**, Institute of Microelectronics, Singapore  
**Rao, Basuthkar**, Tata Inst. of Fundamental Research, India  
**Raouf, Kosai**, Joseph Fourier University of Grenoble, France  
**Rastogi Shiva, K.**, University of Idaho, USA  
**Reig, Candid**, University of Valencia, Spain  
**Restivo, Maria Teresa**, University of Porto, Portugal  
**Robert, Michel**, University Henri Poincare, France  
**Rezazadeh, Ghader**, Urmia University, Iran  
**Royo, Santiago**, Universitat Politecnica de Catalunya, Spain  
**Rodriguez, Angel**, Universidad Politecnica de Cataluna, Spain  
**Rothberg, Steve**, Loughborough University, UK  
**Sadana, Ajit**, University of Mississippi, USA  
**Sadeghian Marnani, Hamed**, TU Delft, The Netherlands  
**Sapozhnikova, Ksenia**, D.I.Mendeleyev Institute for Metrology, Russia  
**Sandacci, Serghei**, Sensor Technology Ltd., UK  
**Saxena, Vibha**, Bbhba Atomic Research Centre, Mumbai, India  
**Schneider, John K.**, Ultra-Scan Corporation, USA  
**Sengupta, Deepak**, Advance Bio-Photonics, India  
**Seif, Selemeni**, Alabama A & M University, USA  
**Seifter, Achim**, Los Alamos National Laboratory, USA  
**Shah, Kriyang**, La Trobe University, Australia  
**Sankarraj, Anand**, Detector Electronics Corp., USA  
**Silva Girao, Pedro**, Technical University of Lisbon, Portugal  
**Singh, V. R.**, National Physical Laboratory, India  
**Slomovitz, Daniel**, UTE, Uruguay  
**Smith, Martin**, Open University, UK  
**Soleymanpour, Ahmad**, Damghan Basic Science University, Iran  
**Somani, Prakash R.**, Centre for Materials for Electronics Technol., India  
**Sridharan, M.**, Sastra University, India  
**Srinivas, Talabattula**, Indian Institute of Science, Bangalore, India  
**Srivastava, Arvind K.**, NanoSonix Inc., USA  
**Stefan-van Staden, Raluca-Ioana**, University of Pretoria, South Africa  
**Stefanescu, Dan Mihai**, Romanian Measurement Society, Romania  
**Sumriddetchka, Sarun**, National Electronics and Computer Technology Center, Thailand  
**Sun, Chengliang**, Polytechnic University, Hong-Kong  
**Sun, Dongming**, Jilin University, China  
**Sun, Junhua**, Beijing University of Aeronautics and Astronautics, China  
**Sun, Zhiqing**, Central South University, China  
**Suri, C. Raman**, Institute of Microbial Technology, India  
**Sysoev, Victor**, Saratov State Technical University, Russia  
**Szewczyk, Roman**, Industrial Research Inst. for Automation and Measurement, Poland  
**Tan, Ooi Kiang**, Nanyang Technological University, Singapore  
**Tang, Dianping**, Southwest University, China  
**Tang, Jaw-Luen**, National Chung Cheng University, Taiwan  
**Teker, Kasif**, Frostburg State University, USA  
**Thirunavukkarasu, I.**, Manipal University Karnataka, India  
**Thumavanam Pad, Kartik**, Carnegie Mellon University, USA  
**Tian, Gui Yun**, University of Newcastle, UK  
**Tsiantos, Vassilios**, Technological Educational Institute of Kaval, Greece  
**Tsigara, Anna**, National Hellenic Research Foundation, Greece  
**Twomey, Karen**, University College Cork, Ireland  
**Valente, Antonio**, University, Vila Real, - U.T.A.D., Portugal  
**Vanga, Raghav Rao**, Summit Technology Services, Inc., USA  
**Vaseashta, Ashok**, Marshall University, USA  
**Vazquez, Carmen**, Carlos III University in Madrid, Spain  
**Vieira, Manuela**, Instituto Superior de Engenharia de Lisboa, Portugal  
**Vigna, Benedetto**, STMicroelectronics, Italy  
**Vrba, Radimir**, Brno University of Technology, Czech Republic  
**Wandelt, Barbara**, Technical University of Lodz, Poland  
**Wang, Jiangping**, Xi'an Shiyong University, China  
**Wang, Kedong**, Beihang University, China  
**Wang, Liang**, Pacific Northwest National Laboratory, USA  
**Wang, Mi**, University of Leeds, UK  
**Wang, Shinn-Fwu**, Ching Yun University, Taiwan  
**Wang, Wei-Chih**, University of Washington, USA  
**Wang, Wensheng**, University of Pennsylvania, USA  
**Watson, Steven**, Center for NanoSpace Technologies Inc., USA  
**Weiping, Yan**, Dalian University of Technology, China  
**Wells, Stephen**, Southern Company Services, USA  
**Wolkenberg, Andrzej**, Institute of Electron Technology, Poland  
**Woods, R. Clive**, Louisiana State University, USA  
**Wu, DerHo**, National Pingtung Univ. of Science and Technology, Taiwan  
**Wu, Zhaoyang**, Hunan University, China  
**Xiu Tao, Ge**, Chuzhou University, China  
**Xu, Lisheng**, The Chinese University of Hong Kong, Hong Kong  
**Xu, Sen**, Drexel University, USA  
**Xu, Tao**, University of California, Irvine, USA  
**Yang, Dongfang**, National Research Council, Canada  
**Yang, Shuang-Hua**, Loughborough University, UK  
**Yang, Wuqiang**, The University of Manchester, UK  
**Yang, Xiaoling**, University of Georgia, Athens, GA, USA  
**Yaping Dan**, Harvard University, USA  
**Ymeti, Aurel**, University of Twente, Netherland  
**Yong Zhao**, Northeastern University, China  
**Yu, Haihu**, Wuhan University of Technology, China  
**Yuan, Yong**, Massey University, New Zealand  
**Yufera Garcia, Alberto**, Seville University, Spain  
**Zakaria, Zulkarnay**, University Malaysia Perlis, Malaysia  
**Zagnoni, Michele**, University of Southampton, UK  
**Zamani, Cyrus**, Universitat de Barcelona, Spain  
**Zeni, Luigi**, Second University of Naples, Italy  
**Zhang, Minglong**, Shanghai University, China  
**Zhang, Qintao**, University of California at Berkeley, USA  
**Zhang, Weiping**, Shanghai Jiao Tong University, China  
**Zhang, Wenming**, Shanghai Jiao Tong University, China  
**Zhang, Xueji**, World Precision Instruments, Inc., USA  
**Zhong, Haoxiang**, Henan Normal University, China  
**Zhu, Qing**, Fujifilm Dimatix, Inc., USA  
**Zorzano, Luis**, Universidad de La Rioja, Spain  
**Zourob, Mohammed**, University of Cambridge, UK

# Contents

Volume 14-2  
Special Issue  
March 2012

www.sensorsportal.com

ISSN 1726-5479

## Research Articles

<b>Information Extraction from Wireless Sensor Networks: System and Approaches</b> <i>Tariq Alsboui, Abdelrahman Abuarqoub, Mohammad Hammoudeh, Zuhair Bandar, Andy Nisbet...</i>	1
<b>Assessment of Software Modeling Techniques for Wireless Sensor Networks: A Survey</b> <i>John Khalil Jacoub, Ramiro Liscano, Jeremy S. Bradbury</i>	18
<b>Effective Management and Energy Efficiency in Management of Very Large Scale Sensor Network</b> <i>Moran Feldman, Sharoni Feldman</i>	47
<b>Energy Efficient in-Sensor Data Cleaning for Mining Frequent Itemsets</b> <i>Jacques M. Bahi, Abdallah Makhoul, Maguy Medlej</i>	64
<b>IPv6 Routing Protocol for Low Power and Lossy Sensor Networks Simulation Studies</b> <i>Leila Ben Saad, Cedric Chauvenet, Bernard Tourancheau</i>	79
<b>Self-Powered Intelligent Sensor Node Concept for Monitoring of Road and Traffic Conditions</b> <i>Sebastian Strache, Ralf Wunderlich and Stefan Heinen</i>	93
<b>Variable Step Size LMS Algorithm for Data Prediction in Wireless Sensor Networks</b> <i>Biljana Risteska Stojkoska, Dimitar Solev, Danco Davcev</i>	111
<b>A Framework for Secure Data Delivery in Wireless Sensor Networks</b> <i>Leonidas Perlepes, Alexandros Zaharis, George Stamoulis and Panagiotis Kikiras</i>	125
<b>An Approach for Designing and Implementing Middleware in Wireless Sensor Networks</b> <i>Ronald Beaubrun, Jhon-Fredy Llano-Ruiz, Alejandro Quintero</i>	150
<b>Mobility Model for Self-Organizing and Cooperative MSN and MANET Systems</b> <i>Andrzej Sikora and Ewa Niewiadomska-Szynkiewicz</i>	164
<b>Evaluation of Hybrid Distributed Least Squares for Improved Localization via Algorithm Fusion in Wireless Sensor Networks</b> <i>Ralf Behnke, Jakob Salzmann, Philipp Gorski, Dirk Timmermann</i>	179
<b>An Effective Approach for Handling both Open and Closed Voids in Wireless Sensor Networks</b> <i>Mohamed Aissani, Sofiane Bouznad, Abdelmalek Hariza and Salah-Eddine Allia</i>	196
<b>Embedded Wireless System for Pedestrian Localization in Indoor Environments</b> <i>Nicolas Fourty, Yoann Charlon, Eric Campo</i>	211
<b>Neighbourtables – A Cross-layer Solution for Wireless CiNet Network Analysis and Diagnostics</b> <i>Ismo Hakala and Timo Hongell</i>	228

<b>A Column Generation based Heuristic to extend Lifetime in Wireless Sensor Network</b> <i>Karine Deschinkel</i> .....	242
<b>Adapting OLSR for WSNs (iOLSR) Using Locally Increasing Intervals</b> <i>Erlend Larsen, Joakim Flathagen, Vinh Pham, Lars Landmark</i> .....	254
<b>Risk Assessment along Supply Chain: A RFID and Wireless Sensor Network Integration Approach</b> <i>Laurent Gomez, Maryline Laurent, Ethmane El Moustaine</i> .....	269
<b>Structure Crack Identification Based on Surface-mounted Active Sensor Network with Time-Domain Feature Extraction and Neural Network</b> <i>Chunling Du, Jianqiang Mou, L. Martua, Shudong Liu, Bingjin Chen, Jingliang Zhang, F. L. Lewis.</i>	283
<b>Efficient Gatherings in Wireless Sensor Networks Using Distributed Computation of Connected Dominating Sets</b> <i>Vincent Boudet, Sylvain Durand, László Gönczy, Jérôme Mathieu and Jérôme Palaysi</i> .....	297
<b>Secure Packet Transfer in Wireless Sensor Networks</b> <i>Yenumula B. Reddy</i> .....	308

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: [editor@sensorsportal.com](mailto:editor@sensorsportal.com)  
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).

**IMAGE SENSORS 2012**  
TWO DAY INTERTECHPIRA CONFERENCE PLUS EXPERT PRE-CONFERENCE WORKSHOPS  
FOCUS ON DIGITAL IMAGING

PRESENTATIONS FROM:

- SoftKinetic
- BBC
- NASA
- NHS
- Leica Geosystems
- Sony Ericsson
- OLYMPUS
- SIEMENS
- Panasonic Ideas for life
- raytrix
- BOSCH
- SAFRAN
- Leti
- SAFRAN
- caeleste
- PELCO
- SONY
- APTINA
- NMK

SUPPORTING PARTNERS:

- Plastic
- IFSA
- 3D Packaging
- imaging and machine vision
- Micronews
- cmva

REGISTER NOW [IMAGE-SENSORS.COM](http://IMAGE-SENSORS.COM)

OVERVIEW [WHY ATTEND](#) [TUES 20 MAR](#) [WED 21 MAR](#) [THURS 22 MAR](#) [VENUE](#)

IMAGE SENSORS 2012  
20-22 March  
Hotel Russell  
London

IS 2012

The 6th International Conference on Sensor Technologies and Applications



## SENSORCOMM 2012

19 - 24 August 2012 - Rome, Italy

Deadline for papers: 5 April 2012



**Tracks:** Architectures, protocols and algorithms of sensor networks - Energy, management and control of sensor networks - Resource allocation, services, QoS and fault tolerance in sensor networks - Performance, simulation and modelling of sensor networks - Security and monitoring of sensor networks - Sensor circuits and sensor devices - Radio issues in wireless sensor networks - Software, applications and programming of sensor networks - Data allocation and information in sensor networks - Deployments and implementations of sensor networks - Under water sensors and systems - Energy optimization in wireless sensor networks

<http://www.aria.org/conferences2012/SENSORCOMM12.html>

The 3rd International Conference on Sensor Device Technologies and Applications



## SENSORDEVICES 2012

19 - 24 August 2012 - Rome, Italy

Deadline for papers: 5 April 2012



**Tracks:** Sensor devices - Ultrasonic and Piezosensors - Photonics - Infrared - Geosensors - Sensor device technologies - Sensors signal conditioning and interfacing circuits - Medical devices and sensors applications - Sensors domain-oriented devices, technologies, and applications - Sensor-based localization and tracking technologies

<http://www.aria.org/conferences2012/SENSORDEVICES12.html>

The 5th International Conference on Advances in Circuits, Electronics and Micro-electronics



## CENICS 2012

19 - 24 August 2012 - Rome, Italy

Deadline for papers: 5 April 2012



**Tracks:** Semiconductors and applications - Design, models and languages - Signal processing circuits - Arithmetic computational circuits - Microelectronics - Electronics technologies - Special circuits - Consumer electronics - Application-oriented electronics

<http://www.aria.org/conferences2012/CENICS12.html>

## Effective Management and Energy Efficiency in Management of Very Large Scale Sensor Network

<sup>1</sup> Moran FELDMAN, <sup>2</sup> Sharoni FELDMAN

<sup>1</sup> Faculty of Computer Science, Technion, Israel Institute of Technology, Haifa 32000, Israel

Tel.: +972-4-8294948

<sup>2</sup> Advance Technology Consulting (ATC), Haifa, Israel

Tel.: +972-4-8294948

E-mail: moranfe@cs.technion.ac.il, feldsh@netvision.net.il

*Received: 14 November 2011 /Accepted: 20 December 2011 /Published: 12 March 2012*

---

**Abstract:** One of the major challenges in deploying large scale sensor networks is to make the sensors weave dynamically and autonomously into a sensing plan. In this paper we present a novel algorithm with the following characteristics: (a) it is applicable for thousands of sensors, (b) it uses the tree based organization to present an aggregation method that aggregates discrete events into compound events that reduce the traffic, (c) it presents a set of security levels to ensure that events are transmitted to the sink, (d) it presents backup layers to ensure maximal connectivity and (e) it is applicable for sensors without GPS. The algorithm was successfully tested using the dedicated IFAS simulator on a terrain containing up to 10,000 sensors. Our results show that the sensors succeed to weave into a sensing plan, identifying multiple intruders and reporting the events to the sink in a short time.

*Copyright © 2012 IFSA.*

**Keywords:** Large scales sensors, Routing, Localization, Data aggregation.

---

### 1. Introduction

The evolution of microelectronics and communication technologies facilitates the manufacturing of miniature sensors comprising of a small transmitter/receiver, a processor, memory components and a low-power battery [1, 2]. Most often, the sensor, or node, is a Boolean sensing device, able to detect an event within a given sensing range, and report the event using a wireless sensor network (WSN) to one of the sinks. The WSN is constructed via inter-communication between physically adjacent nodes.

WSNs have drawn considerable attention from the research community. The network organization of most WSNs fall into one of a few common categories, defined according to the network structure [3]. The first category is flat routing, wherein all nodes have an identical role. The routing of events from the sensing nodes to the sinks can use any node in the network without any limitations and without interacting with any central nodes [4-7].

The second category consists of hierarchical routing protocols. In these kinds of protocols, part of the sensors possess additional tasks. In this case, the sensors are grouped into clusters. One of the sensors in every cluster is designated as the cluster-head. If necessary, it is also possible to group cluster heads into new clusters [8-11]. This organization method delegates routing responsibilities to the cluster heads, and remove this burden from the regular nodes. However, the additional tasks of the cluster heads require them to be more powerful (*i.e.*, have higher energy resources), as opposed to the regular low-power nodes which are used for sensing. Often the cluster heads aggregate data in order to reduce the number of messages transmitted in the direction of the sink. This method is applicable when the number of sensors is very large. Hierarchical routing is considered an efficient way to reduce energy consumption by transferring the aggregation process to the cluster head.

A third category is location-based routing. Such protocols assume that the sensors are aware of their position in the theater. This location information can be exploited in order to route data over the network more efficiently. The sensor location can be obtained from a GPS receiver installed in every sensor [12]. Another method uses relative coordinates that are based on information gathered from neighboring sensors. The distance between neighboring sensors can be estimated according to the strength of the incoming signals [13-15]. An interesting approach is presented in [16]. The traffic is divided into two types: high priority traffic and low-priority traffic. High priority data is routed using a dedicated congestion zone arranged as a spanning tree with the sink as a root and the low priority traffic is routed via other nodes on longer paths. This model enables each node to be connected to several trees; one tree per sink.

Another classification of WSN routing protocols is based on the amount of energy spent on network organization in advance. There are three main types under this classification: proactive, reactive and hybrid protocols. The first type requires every node to prepare the routing paths in advance, prior to the actual need. This type of protocol requires persistent maintenance of the routing tables, which demands a constant energy input. A reactive protocol creates a routing path only when it is actually needed, thus saving energy. The weakness of reactive protocols compared to proactive ones is the time needed to create a route once such a route becomes necessary. Hybrid protocols constitute a combination of the former types.

In this paper, we present the Very Large Scale Sensor Network Algorithm (VLSSNA). The VLSSNA presents a novel routing technique for very large sensor network composed of 10,000 sensors. This number is significantly higher than the number presented in literature [4]. This algorithm creates a flat network (or single cluster network) without hierarchy and specific tasks to selected sensors. Moreover, the algorithm enables the network operators to define a connectivity level to the network. This connectivity level enables the operator to assign an "importance level" to events and to transmit important events on parallel layers of the network. This feature increases significantly the probability that events to reach the sinks even in case some intermediate nodes malfunction.

The sensors dissemination process is totally a random process without any prior definitions in the sensors. The organization of the network is an autonomous procedure requiring no external intervention. In our research, we assume a sensor density that prevents an object from crossing the sensing field without being detected [17].


A sensor network faces two basic, and somewhat contradictive, requirements. The first requirement is to use as few energy as possible to transfer events to the sink. The other requirement is to ensure that critical events will not disappear due to malfunctions. Energy economization is achieved using an aggregation process that minimizes the number of messages and a communication method that combines broadcasting and sensor-to-sensor communication.

The remainder of this paper is organized as follows. Section 2 presents the theater and the network elements, section 3 presents the sensors control and management, section 4 presents the events management process, event aggregation and delivery verification, section 5 deals with energy saving methods, section 6 presents the simulator used for evaluation of the sensor network and section 7 presents the simulations and results. Conclusions follow in section 8.

## 2. Theatre and Network Elements

### 2.1. The Theater

Fig. 1 presents a schematic view of a typical theater on which the sensors are dispersed. The sensors are dispersed so that their density ensures that every target will be detected by one or more sensor. At the edge of the theater, three base stations (BSs) are placed, arranged in an equilateral triangle. The BSs are connected by a high-speed communication link. At least one sink controls and monitor the events.

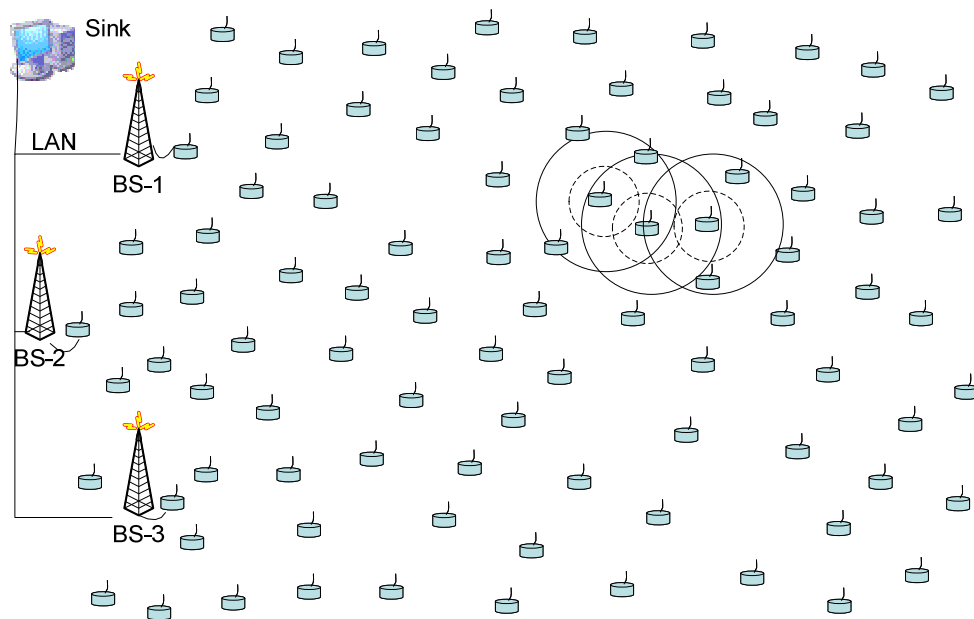

**Fig. 1.** A typical sensor theater. Three base stations organized as an equilateral triangle and a single sink monitor the wireless sensor network.

### 2.2 Network Elements

#### 2.2.1. Base Stations

The BSs are identical, and they are controlled by the sink. Every BS is required to know its exact position in space ( $x, y, z$ ) coordinates. This information can be obtained manually when the BS is installed or via a GPS. In addition, all BSs clocks are synchronized.

A BS is constructed of the following units:

1. A long-range downstream transmitter that cover the whole theatre.
2. A short-range downstream transmitter that cover the adjacent sensors.
3. An upstream receiver that receives messages from adjacent sensors within their transmission range.
4. A high speed LAN that connects all BSs and the sink. This LAN is used to transfer synchronization data among the BSs and the sink, alarms received from the sensors and messages from the sink to the BSs and the sensors.

### **2.2.2. Sensors**

The sensors are scattered in the terrain. The distribution of the sensors in the theater is not required to be uniform, however, it is assumed that no sensor is isolated. A sensor is a dispensable device of a limited life expectancy. The network can continue functioning even with a certain decrease in the number of active sensors. The design of the network allows the operators to add periodically new sensors to the field to replace the sensors that ceased to operate.

A sensor is composed of the following major units:

1. A binary sensing device such as a microphone. The sensing distance is limited and usually (but not always) is shorter than the transmission range. The sensing device is able to detect an intruder within the detection range but is unable to detect the direction or distance of the event.
2. A short range transmitter. Fig. 1 presents a sensors field. The dashed lines present the sensing range while the full lines present the transmission range. A sensor can receive messages transmitted from other sensors within their transmission range or from the BSs.
3. A processor that runs the stored program.
4. A battery that supplies energy to the processor and transmitter.

## **3. Sensors Control and Management**

### **3.1. First Network Activation**

The network activation process starts after all sensors are scattered in the field. Sensors in the field will not start to operate until the activation process is done. The activation process is used to synchronize all sensors clocks, and let the sensors determine their physical location. The activation process has 3 steps and is coordinated by the BSs:

1. BS<sub>1</sub> sends a beacon that covers the whole field. This beacon carries the following data elements:
  - a. Time stamp used to synchronize the internal clock of every sensor and the other BSs.
  - b. The name and geographical location (XBS<sub>1</sub>, YBS<sub>1</sub>, ZBS<sub>1</sub>) of BS<sub>1</sub>.
  - c. Wait time ( $t_w$ ) in milliseconds.
2. BS<sub>2</sub> waits  $t_w$  milliseconds (the value  $t_w$  is set in step 1) before broadcasting a beacon. This beacon cover the whole field and carries the following parameters:
  - a. Time stamp.
  - b. The name and geographical location (XBS<sub>2</sub>, YBS<sub>2</sub>, ZBS<sub>2</sub>) of BS<sub>2</sub>.
3. BS<sub>3</sub> will wait  $t_w$  milliseconds after BS<sub>2</sub> transmission before broadcasting a beacon. This beacon parameters and the process are identical to these of BS<sub>2</sub>.

After receiving the 3 beacons, every sensor starts its localization algorithm (based on trilateration). This algorithm use the information received in the beacons, and the arrival time of each beacon. The output of the algorithm is physical location of the sensor and the exact time (according to the clocks of BSs).

The network activation process runs periodically and is used to join new sensors that were added to the field or remap old sensors that were moved inside the field.

### 3.2. Messages and Data Transfer

The communication among the network elements is performed by messages. The network elements exchange broadcast messages addressed to all listening nodes within the transmission range and directed messages that address a specific node within the transmission range. Another type of classification is based on the transmission range of the message originator. A BS can transmit short range and long range messages while a sensor is capable of transmitting short range messages only. Table 1 summarizes the possible combinations of message types and message transmission ranges. While a BS can send directly a long distance message to every node in the terrain, a node which is required to send an event to the BS, is required to use intermediate nodes to bridge the distance. The process of transferring the information from the node to the BS is based on a “store and forward” mechanism. A node that received a message will forward the message to the next leg in the chain only after the message was received completely.

**Table 1.** Possible Combinations of Message Types and Ranges.

<i>MSG Range</i> <i>Type</i>	<b>Long Range Message</b>	<b>Short Range Message</b>
<b>Directed Message</b>	A message sent by a BS, directed to a specific sensor in the theater. The addressed sensor is identified by unique sensor-id within the terrain.	A message sent by sensors or the short-range transmitter of the BS. This message is addressed a specific sensor identified by unique sensor-id within the transmission range.
<b>Broadcast Message</b>	A message transmitted by a BS. This message is targeted to all sensors in the terrain	A message sent by sensors or the short-range transmitter of the BS. This message targets all receiving nodes within the short transmission range.

Special attention was given to energy saving. We implemented “energy saving” methods in critical and demanding procedures. Details appear in the relevant sections below.

### 3.3. Trees Formation Processes (TFA)

During the trees formation phase, each BS constructs a spanning tree. The constructions are done simultaneously, but independently. This phase starts after the activation process and terminates once all sensors joined all trees.

Fig. 2 presents a glance to the tree formation process. Fig. 2A presents the first step in the tree formation process initiated by BS<sub>2</sub>. BS<sub>2</sub> sends a beacon (actually a “Hello” message) via its short-range transmitter. Three nodes are within the transmission range and they join BS<sub>2</sub> tree and get the logical address <2.1>, <2.2> and <2.3> The prefix <2.> represents the root Base station. Now every one of the nodes <2.1>, <2.2> and <2.3> continue independently the process of building BS<sub>2</sub>’s tree. Fig. 2B presents the next step. Nodes 1-3 send a beacon and let additional nodes join the tree as their children. For example, node <2.2> gets two children: nodes <2.2.1> and <2.2.2>, while node <2.3> gets nodes <2.3.1> and <2.3.2> as its children. The number of children of a node is unlimited and can vary from node to node. Fig. 2C presents the ongoing process of building the tree.



### **3.4. Detailed Description – TFA Algorithm**

In this section we describe in details a single TFA. TFA organizes the nodes in the field in a tree rooted at a given BS. Only nodes that belong to the tree can transfer events to the BS which acts as the tree root of this tree. To ensure maximal connectivity, all nodes try to join the tree. Every node in the field has a unique *node-id* (like phone number or IP address) and virtual coordinates (of the type *x.y.z.*) that are tree specific, and may change when the tree structure changes. Every tree is identified by a “*tree name*” which is the *id* of its BS root node. Nodes send periodically beacons (*hello* messages). If a node that does not belong to the tree receives a beacon from a node in the tree, it becomes a child of the beacon sender. The protocol satisfies the follow properties:

1. Eventually (assuming no dynamic changes occur) all nodes within transmission area fuse into a single tree.
2. The protocol maximizes the number of nodes joining the tree in each step (yielding a parallel fuse).
3. Nodes periodically attempt to balance the tree by improving their position in tree and joining higher-level nodes.
4. The protocol is fully distributive with no “central” bottlenecks, namely it is defined at the level of pairs of nodes. The merging node gets new coordinates in its new tree according to its new position.
5. Running alarms are not be affected (*i.e.*, do not break) in any way as trees join or rearrange themselves.
6. The parallel process of creating the trees (with the roots BS<sub>1</sub>, BS<sub>2</sub>...) if fully orthogonal (*i.e.*, there is no dependency between the trees).
7. When all TFAs stabilize, every node is a member of every tree.

The TFA algorithm sends Hello messages periodically. The frequency of the transmission run depends on the stability of the network and the changes in the field. The repeated transmission is required in order to bridge “holes” created by faulty sensors, and to add new sensors to the network.

### **4. Events, Events Aggregation and Delivery Verification**


In our model, every sensor has a circular events detection area around the sensor. An intruder that enters the sensors field will stimulate every node whenever it enters its detection radius.

Every node that detects an intruder within its detection range sends an event message to its father. Fig. 4 presents a section of the sensors field and the intruder path within it. The circle around each sensor presents the detection zone of the sensor. Our assumption is that every sensor is able to perform basic filtering of the detected noise, *i.e.* a sensor programmed to detect a noise of a car will not respond to a noise created by a walking animal or the barking of a dog.


Fig. 4 presents a case when an intruder crosses the field and triggers 4 sensors. The root of the tree is <1>, it has two children <1.1> and <1.2>. Node <1.1> has 3 children and node <1.2> has 1 child. Recall that the intruder activates only the sensors located on his path. Every node can take one of the following roles: detect an intruder (like node <1.1.1>), participate in the process of transferring the event to the sink (like node <1.1>) or being idle (like node <1.2.1.1>).

The software that runs in all nodes is identical and must cope with the detection, basic analysis and transfer of the event towards the sink. The tree structure creates a natural organization of the nodes, which allows each subtree root to “aggregate” events from the subtree, and minimize the amount of messages transferred towards the sink. For example, node <1.1> is able to aggregate the events

detected by its children <1.1.X> and send it as a unified event to its father. Fig. 5 presents the basic automaton that runs in every node. This automaton enables the node to act in one of two possible ways: detect an event or receive and handle event messages from its children and transfer them either transparently or with some updates toward the sink.

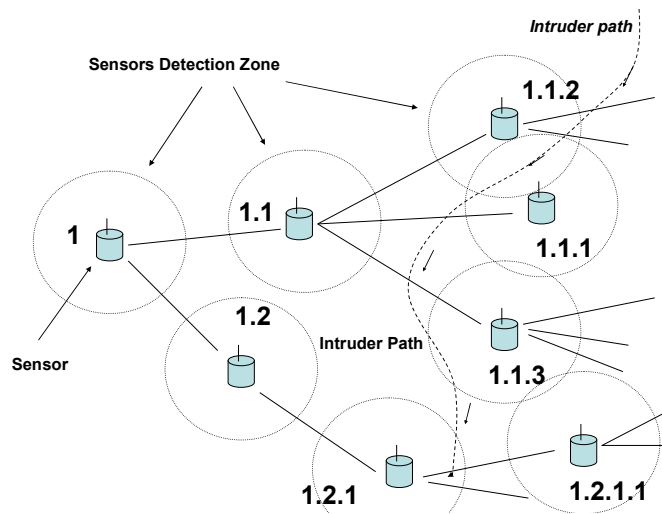

**Fig. 4.** Sample Intruder Path.

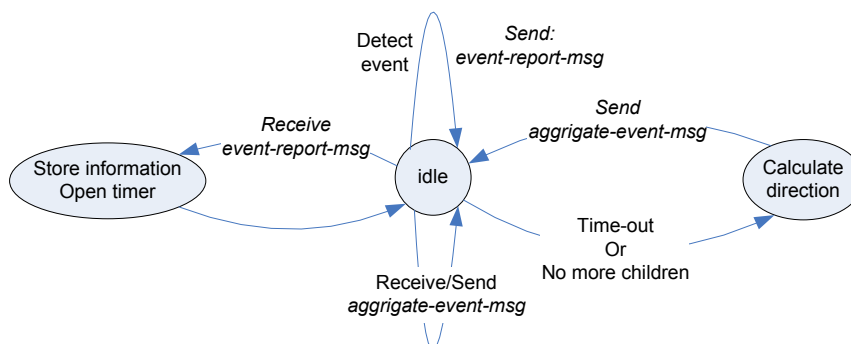

**Fig. 5.** Node basic automaton.

The automaton is composed of 3 states.

1. **Idle.** This is the stable state of the node. In this state, the node is waiting for an event created by the intruder or to a message from one of its children. When the node detects an intruder, it will send the message “*event-report-message*” with the event details to its father. The main event details are the geographical location of the node and the event timestamp. After detecting an event, the node will not report any additional event for a short time span. This prevents the node from creating a flood of messages toward the sink caused by a single short timed stimulation.

2. **Store information – open timer.** As soon as the node receives an “*event-report-message*” from one of its children, it assumes that its other children may detect this same event. The node stores the event data and waits for additional messages from the other children. A short wait timer is activated in order to limit the wait time. If the node receives an “*event-report-message*” from all its children, the timer is cancelled because it becomes redundant.



For example assume that node <1.1> in Fig. 4 aggregates the “*event-report-messages*” arriving from nodes <1.1.2>, <1.1.1> and <1.1.3>. Assuming that the geographical ( $x, y$ ) coordinates of the nodes are (10, 100), (30, 120) and (90, 100) respectively. The substructure “*event 1*” in the “*aggregated-event-message*” will be populated with the details of node <1.1.2> and the substructure “*event 2*” will be populated with the details of node <1.1.3> .

The need to aggregate messages requires that inbound messages will be delayed in the node for a period of time. This delay enables other inbound event messages to arrive and be aggregated into a single aggregated message. Fig. 7 presents two different cases of the aggregation process. Fig. 7A presents the case when an inbound message enters a sensor. This message waits for the “*delay time*” before being outbound by the node. The delay times of the 3 inbound messages do not overlap, and as a result 3 outbound messages are transmitted towards the next level. Fig. 7B presents the opposite case where two messages arrive during the “*delay time*” of the first message. All three messages are aggregated into a single outbound message.

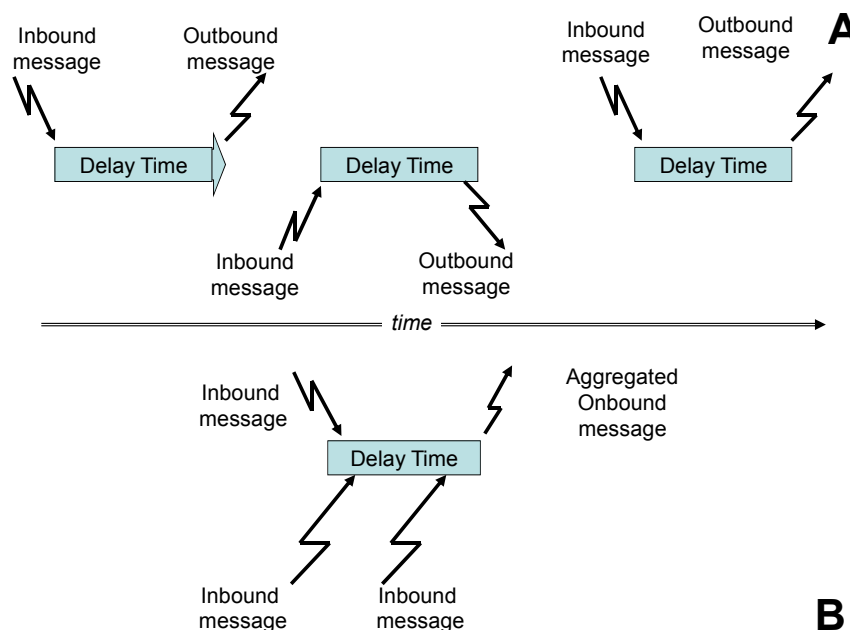


Fig. 7. Schematic Description of Aggregation Process.

## 4.2. Event Delivery Verification

The verification feature ensures with high level of certainty that the reported event has been transferred successfully from the sensing nodes via the routing nodes to the Base Stations and the sink. The network architecture enables the use two types of verification levels. The basic method is "Report & Forget" which does not require the BS to acknowledge the acceptance of the event report. The enhanced method "Report & Acknowledge" requires the receiving Base Station to send an acknowledgement to the reporting nodes. The acknowledgement need not use the sensors network to get to the sender. Instead, it is broadcasted as a "Shout" message transmitted directly from the BS to the sensor. In case the event originator does not receive an acknowledgment within a predefined period, it resends the event report.

Another capability of the architecture is to use two levels of energy saving delivery methods. The economized method uses a "Load-Sharing" mechanism where the reporting node selects cyclically one of the trees and sends the event report over this tree to a single Base Station. The other method, known

as "Active-All" mechanism, is more energy consuming. Under this method, the node sends a copy of the event report over all possible trees in parallel. The replicated events are propagated to the Base Stations and the sink. Using the events time and locations, the sink fuses the replicated events into one single event.

## **5. Energy Saving Methods**

The energy resources of the nodes are very limited. A critical factor in the design of the VLSSNA algorithm was to reduce the energy utilization as much as possible and to enable the network operators to select an operation mode that fits both the needs and the energy resources of the nodes.

The following list presents the major energy saving methods used by the algorithm.

1. The tree formation process is sensitive to the distances between the potential father and the children. The purpose is to balance between the number of relay nodes that an event message has to cross, the latency and robustness of the tree. In case a node is able to control its transmission power, and has more than a single candidate to become its father, it will select the most "economical" father that is not too close.
2. Optional Acknowledge (Ack) via "shouting". A node that generates an *event-message* is able to ask for an acknowledgment indicating that the event message arrived successfully to the sink. An absence of this confirmation will trigger the sensor to send again the *event-message* after a predefined wait time. A common method is to use the sensors network and send an Ack message back to the originating node via the path of the *event-message* or a similar solution. Our method takes a different direction. The *Ack-message* is sent via the "shouting" mechanism. A message is sent by the sink via one of the Base stations. This message includes the ID of the originating sensor. A successful reception of the *Ack-message* by the sensor will cancel the retransmissions of the *event-message*.
3. Using an adjustable replicated transmissions. A node that generates an *event-message* selects the number of replications according to the criticality of the event. The number of replications can take any value between 1 and the number of trees. The selection of value 1 implies that the originating node will select one tree and send the *event-message* on this tree. In case of more critical events, the node selects two or more trees and sends the *event-message* in parallel on these trees.

The ability of the initiating sensor to select different trees contributes also to an even utilization of energy in the network. For example, if a specific sensor sends more often an *event-message*, the trees selection disperses the burden of transmitting these messages between different routing paths.

## **6. The IFAS: Interactive Flexible Ad Hoc Simulator**


For testing and evaluating the protocols described in this research (VLSSNA and TFA) we used the IFAS simulator [18]. IFAS was originally developed for evaluating the performance of ad-hoc protocols and was later adapted for sensor networks. In this section, we shall describe the simulator and the simulation scenarios.

The simulator was originally designed and developed for testing ad hoc protocols and running comparative tests. Special attention was given to the following aspects: (i) enhanced visualization tools that give a full online view of the theater, zooming of selected zones, node movements and voice channels in ad hoc networks, and specific node status including queue status; (ii) tracing the formation of trees ; (iii) tracing the events transfer and sessions in real time; (iv) configuration and simulation

definition via online screens; (v) definition and tracking of intruders paths and pace and (vi) support of logging, debugging and analysis tools.

The enhanced visualization capabilities, unique to this simulator, contributed to the understanding of the protocols behavior, as we were able to view the progress in the field and detect unexpected behavior.

The simulator enables the user to get detailed online reports on a single node behavior while the system runs. These capabilities set afloat disruptions in specific nodes behavior as a result of their location in the field. Fig. 8 presents the initial status of entities management screen with 3 Base stations and 3000 sensors. The location of every sensor is selected randomly within the theater. It is possible to “kill” nodes, zoom in and zoom out selected areas and trace explicitly certain events.

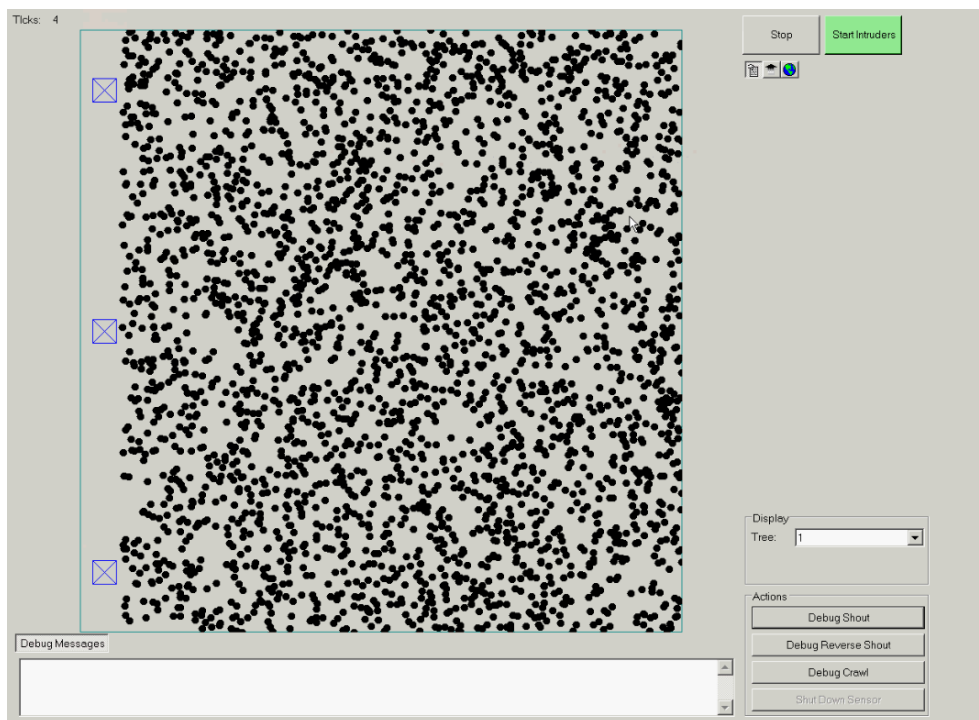

**Fig. 8.** Sample Testing Terrain with 3000 sensors and 3 Base Stations.

Fig. 9 presents one of the trees. The root tree is Base Station 2. The intruders, which are not visible in this view, are crossing the field and activating the sensors. In the bottom of the screen we see the events received by the BS.

## 7. Simulations and Results

The simulation environment creates the infrastructure to analyze the following elements:

1. The efficiency and scalability of the TFA algorithm.
2. The performance of the network in the following aspects:
  - a. The contribution of the aggregation process to reduce the number of messages
  - b. The delay created by nodes as a result of the aggregation process

The tests were performed using the parameters presented in Table 2.

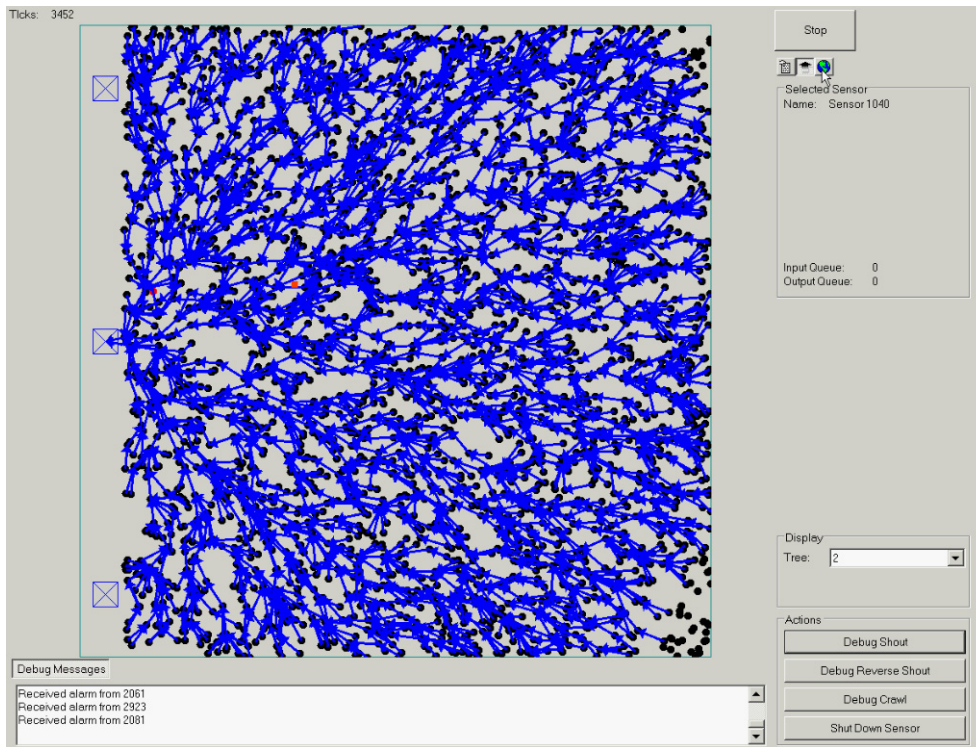


Fig. 9. Sample Tree with BS-2 as a root.

Table 2. Quantities details.


Parameter	Value
Number of sensors	3000 sensors (except for the scalability tests)
Field size	1 km × 1 km
Sensor transmission range	60 meters
Event detection range	10 meters

Fig. 10 presents the BSs organization. BS-1, BS-2 and BS-3 act as the trees roots and are able to broadcast *shout-messages* that cover the whole terrain. In addition, the events are received via these BS.

The localization algorithm requires using a minimum of three synchronized beacons that broadcast periodically a time event. The best organization for the beacons is in an equilateral triangle. To show an applicative possibility, we combined the functionality of two beacons with BS-1 and BS-2 and created a Support Basestation (SBS) that participates only on the localization process. The distance between SBS, BS-1 and BS-2 is  $d$ . Note that it is possible to use the SBS as a replacement for BS-3, however, it requires dissemination of sensors also in the triangle created by the SBS, BS-1 and BS-2.

### 7.1. Scalability and Connectivity

The basic requirement from the TFA algorithm is to connect all sensors in the field into one single network. This requirement inspires two sets of tests.

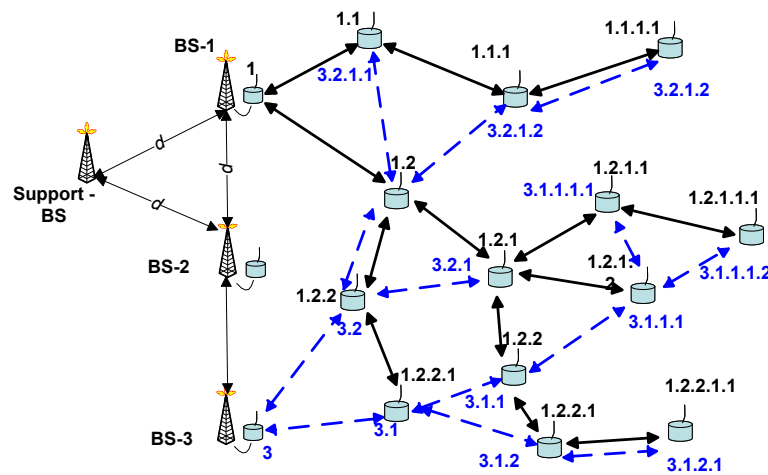

**Fig. 10.** Base stations Organization.

1. Scalability tests. We run the TFA algorithm on a field with a minimal population of 1000 sensors and a maximal population of 10,000 nodes. The trees creation process succeeded to fuse all sensors into a single tree without any measurable impact on the performance.
2. Connectivity tests. The connectivity tests included two groups of tests. The first group verified that all nodes dispersed in the field are merged into a single tree. The second group of tests checked what happens if sub-tree nodes within the tree stops functioning. The tests show that if the last condition happens, the nodes that belong to the subtree of the faulty node discover the fault and leave the tree. Once the nodes left the tree, a fusion process starts fusing them back into the tree and results in a new fully connected field.

## 7.2. Average Nodal Delay

Intuitively, two factors contribute to the efficiency of the aggregation process – the nodal delay time and the number of the tree levels that participate in the aggregation process. Fig. 11 presents the impact of the nodal delay time on the aggregation process. In this test, we measured the percentage of aggregated messages out of all event messages triggered by the intruder as a function of the nodal delay time. In this test, every inbound message received by a sensor on its way to the sink is delayed for a fixed period before it is outbounded to the next tree level. We expect that the number of aggregated messages to a single message will grow as the internal delay grows. The delay allows more inbound messages to overlap the delayed message and to be aggregated into a single message. One can observe that a delay of 700 ms produce 33 % of aggregation. A small increase to 40 % is achieved when the delay grows to 1200 ms. Additional delay time greater than 1200 ms does not contribute to the performance. Note that the increase in the performance costs a significant delay in the arrival of the alarm message to the sink.

## 7.3. The Practically of $k$ -level Aggregation Process

Fig. 11 presents the contribution of every level in a  $k$ -level aggregation process. It is clear that the first and second levels have the most significant contribution. The number of matched messages decreases significantly as the level grows. This experiment shows that 2-3 aggregation levels are enough, as the contribution of additional levels is very marginal. Moreover, as discussed above, adding more aggregation levels contributes to the event transfer delay, and therefore, should be avoided.

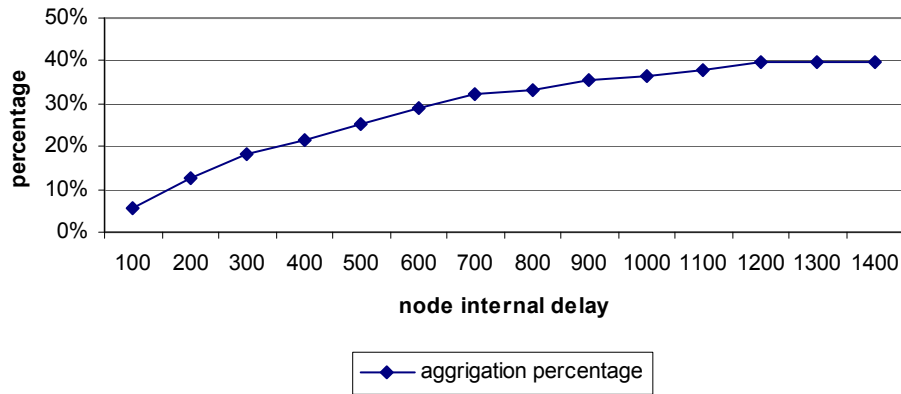


Fig. 11. Average aggregation percentage Vs. Nodal Delay.

#### 7.4. The Efficiency of the Aggregation Process

Fig. 12 presents a subset of our tested scenarios. In our testing environment, the base stations  $S_1$ ,  $S_2$  and  $S_3$  are located along one side of the theater. The movement direction of the intruders is presented by arrows. In the scenarios presented here, all intruders' speeds were identical and equal to 8 meters/second.

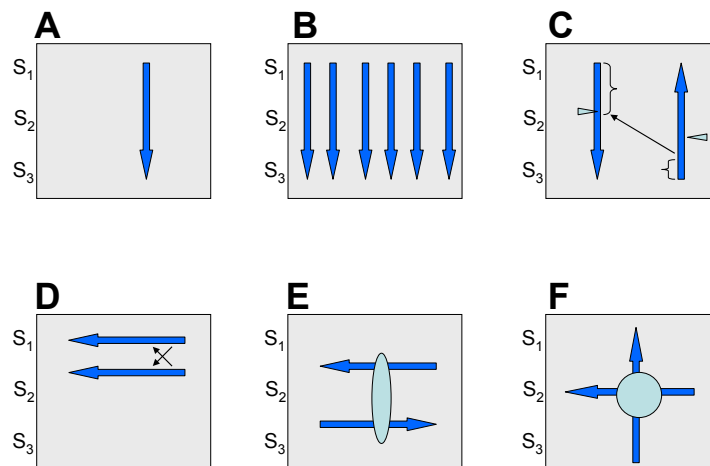


Fig. 12. Scenarios for testing Aggregation Efficiency.

Let us discuss the 6 cases of Fig. 12 in more details.

1. Fig. 12A presents the simplest case where there is a single intruder moving in a straight line along the “y” axis of the terrain. In this case, the network succeeded to reduce the total number of reported events by 60 % by aggregating events.
2. Fig. 12B presents a complex case of multiple intruders that can be divided into two separated sub cases:
  - a. The distance between the intruders' paths enables the aggregation algorithm to join discrete events into a unified event.
  - b. The distance between the intruders' paths does not enable a reasonable separation between events generated by different intruders. In this case, the aggregation algorithm may aggregate events from foreign paths.

It is impossible to define specific rules to avoid the last case. A good separation between the paths depends on the moving speed of the intruders which may change, the connectivity of the trees, the exact direction of the path and the locations of the base stations.

3. Fig. 12C presents a case where two intruders move along to “y” axis, but in opposite directions. Note that the triangles represent the positions of the two intruders in a given time. This case differs significantly from the two intruders case corresponding to (b). When the intruders move in the same direction, and the paths are far, the aggregation process does not mix events produced by the two different intruders. On the other hand, in the case presented in Fig. 12C, the intruders move in opposite directions and events created by the left intruder may meet the events created by right intruder. Mixing of events may happen in case that “old” events on the right path meet “new” events on the left path. It is possible in some cases to filter the mixed events, however, the implementation of such a filter requires adding extra computational power to the nodes which utilizes extra energy.

4. Fig. 12D presents a case where the intruders move in parallel paths, in same direction but along to “x”. This case presents a situation where the simple algorithm can not distinguish between the separate events in case that the paths are adjacent. The correctness of the algorithm grows as the distance between the paths increases.

5. Fig. 12E presents a case where the intruders move in parallel paths along the “x” axis, but in opposite directions. The algorithm works very nicely as long as the intruders are outside of the elliptic area. However, the quality of the algorithm drops as soon as the intruders enter this area. Again, we notice that the algorithm works correctly more often when the paths are well separated.

6. Fig. 12F presents a case where the intruders move in perpendicular paths. It is possible to distinguish between events created by both intruders as long as they are not within the circular area. Some support to the separation capabilities can be added by using additional information describing the direction and speed of the intruder. However, adding this kind of information to the packet transferred between nodes costs additional transmission and processing energy.

## **8. Conclusions**

1. The tree based connection between sensors presents a very efficient and practical way to connect a very large number of sensors in a sensor network. The method presented in this paper allows also a replication tree mechanism that increases the redundancy of the network and ensures a very high level of connectivity.
2. The aggregation algorithm is targeted to reduce the number of events that are transferred from the network to the sinks. The main purpose of this algorithm is to save transmission energy. A major consideration in the design of such algorithms is the tradeoff between the complexity of the algorithm and its memory size and processing power requirements. In addition, complex algorithms tend to require additional data transmission, which increases significantly the energy consumption of the sensors. A good algorithm should save as many messages as possible without introducing significant extra burden on the resources of the sensor.

## **References**

- [1]. G. Pottie and W. Kaiser, Wireless integrated network sensors, *Communications of the ACM*, Vol. 43, May 2000, pp. 51-58.

- [2]. J. Kahn, R. Katz, and K. Pister, Mobile networking for smart dust, in *Proceedings of the Annual ACM/IEEE International Conference on Mobile Computing and Networking (MobiCom)*, 1999, pp. 271-278.
- [3]. J. N. Al-Karaki and A. E. Kamak, Routing Techniques in Wireless Sensor Networks: A Survey, *IEEE Wireless Communications*, Vol. 11, Issue 6, 2004, pp. 6-28.
- [4]. Y. Fan, A. Chen, L. Songwu, and Z. Lixia, A scalable solution to minimum cost forwarding in large sensor networks, in *Proceedings of 10<sup>th</sup> International Conference on Computer Communications and Networks*, 2001, pp. 304-309.
- [5]. C. Intanagonwiwat, R. Govindan, and D. Estrin, Directed diffusion: a scalable and robust communication paradigm for sensor networks, in *Proceedings of the ACM MobiCom*, Boston, Ma, 2000, pp. 56-67.
- [6]. J. Kulik, W. Rabiner, and H. Balakrishnan, Negotiation-Based Protocols for Disseminating Information in Wireless Sensor Networks, *Wireless Networks*, Vol. 8, Num. 2-3, 2002, pp. 169-185.
- [7]. D. Braginsky and D. Estrin, Rumor Routing Algorithm for Sensor Networks, in *Proceedings of the 1<sup>st</sup> Workshop on Sensor and Applications (WSNA)*, Atlanta, GA, Oct. 2002, pp. 1-12.
- [8]. W. Heinzelman, A. Chandrakasan, and H. Balakrishnan, Energy Efficient Communication Protocol for Wireless Mi-crosensor Networks, in *Proceedings of the Hawaii International Conference on System Sciences (HICSS '00)*, Jan. 2000, pp. 323-327.
- [9]. L. Subramanian and R. H. Katz, An Architecture for Building Self Configurable Systems, in *Proceedings of the IEEE/ACM Workshop on Mobile Ad Hoc Networking and Computing*, Boston, MA, August 2000, pp. 63-73.
- [10]. Q. Fang, F. Zhao, and L. Guibas, Lightweight Sensing and Communication Protocols for Target Enumeration and Aggregation, in *Proceedings of the ACM International Symposium on Mobile Ad Hoc Networking and Computing (MobiHoc)*, 2003, pp. 165-176.
- [11]. F. Ye, H. Luo, J. Cheng, and S. Lu, L. Zhang, A Two-tier data dissemination model for large-scale wireless sensor networks, *Proceedings of the Annual ACM/IEEE MobiCom*, 2002, pp. 148-159.
- [12]. Y. Xu, J. Heidemann, and D. Estrin, Geography-informed Energy Conservation for Ad-hoc Routing, in *Proceedings of the 7<sup>th</sup> Annual ACM/IEEE International Conference on Mobile Computing and Networking*, 2001, pp. 70-84.
- [13]. Savvides, C-C Han, and M. Srivastava, Dynamic fine-grained localization in Ad-Hoc networks of sensors, in *Proceedings of the 7<sup>th</sup> ACM Annual International Conference on Mobile Computing and Networking (MobiCom)*, July 2001, pp. 166-179.
- [14]. N. Bulusu, J. Heidemann, and D. Estrin, GPS-less low cost outdoor localization for very small devices, *IEEE Personal Communications Magazine*, Vol. 7. No. 5, Apr. 2000, pp. 28-34.
- [15]. S. Capkun, M. Hamdi, and J. Hubaux, GPS-free positioning in mobile ad-hoc networks, in *Proceedings of the 34<sup>th</sup> Annual Hawaii International Conference on System Sciences*, 2001 pp. 3481-3490.
- [16]. R. Kumar, R. Hosam, and C. Guohong, A. Farooq, Y. Aylin and T. La Porta, Conestion Aware Routing in Sensor Networks, Technical Report, [http://nsrc.cse.psu.edu/tech\\_report/NAS-TR-0036-2006.pdf](http://nsrc.cse.psu.edu/tech_report/NAS-TR-0036-2006.pdf), 2006.
- [17]. Liu and D. Towsley, A Study of the Coverage of Large-scale Sensor Networks, in *Proceedings of the IEEE International Conference on Mobile Ad-Hoc and Sensor Systems*, 2004, pp. 475-483.
- [18]. Y. Ben-Asher, M. Feldman, S. Feldman, and P. Gurfil, IFAS: Interactive flexible ad hoc simulator, *Simulation Modeling Practice and Theory*, 15, 7, 2007, pp. 817-830.

## Guide for Contributors

---

### Aims and Scope

*Sensors & Transducers Journal* (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because of it is a peer reviewed international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per year by International Frequency Sensor Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc. Since 2011 the journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in Elsevier products.

### Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

### Submission of papers

Articles should be written in English. Authors are invited to submit by e-mail [editor@sensorsportal.com](mailto:editor@sensorsportal.com) 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

### Advertising Information

Advertising orders and enquires may be sent to [sales@sensorsportal.com](mailto:sales@sensorsportal.com) Please download also our media kit: [http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2012.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2012.pdf)

***Digital Sensors and Sensor Systems: Practical Design*** will greatly benefit undergraduate and at PhD students, engineers, scientists and researchers in both industry and academia. It is especially suited as a reference guide for practitioners, working for Original Equipment Manufacturers (OEM) electronics market (electronics/hardware), sensor industry, and using commercial-off-the-shelf components, as well as anyone facing new challenges in technologies, and those involved in the design and creation of new digital sensors and sensor systems, including smart and/or intelligent sensors for physical or chemical, electrical or non-electrical quantities.



*"It is an outstanding and most completed practical guide about how to deal with frequency, period, duty-cycle, time interval, pulse width modulated, phase-shift and pulse number output sensors and transducers and quickly create various low-cost digital sensors and sensor systems ..."* (from a review)

Order online:

[http://www.sensorsportal.com/HTML/BOOKSTORE/Digital\\_Sensors.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Digital_Sensors.htm)



[www.sensorsportal.com](http://www.sensorsportal.com)