

ISSN 1726-5479

# SENSORS & TRANSDUCERS

7<sup>vol. 142</sup>  
/12



## Sensor Networks and Wireless Sensor Networks

International Frequency Sensor Association Publishing



**Editors-in-Chief:** professor Sergey Y. Yurish, tel.: +34 696067716, e-mail: editor@sensorsportal.com

## Editors for Western Europe

Meijer, Gerard C.M., Delft University of Technology, The Netherlands  
Ferrari, Vittorio, Università di Brescia, Italy

## Editors for North America

Datskos, Panos G., Oak Ridge National Laboratory, USA  
Fabien, J. Josse, Marquette University, USA  
Katz, Evgeny, Clarkson University, USA

## Editor South America

Costa-Felix, Rodrigo, Inmetro, Brazil

## Editor for Eastern Europe

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

## Editor for Asia

Ohyama, Shinji, Tokyo Institute of Technology, Japan

## Editor for Africa

Maki K.Habib, American University in Cairo, Egypt

## Editor for Asia-Pacific

Mukhopadhyay, Subhas, Massey University, New Zealand

## Editorial Advisory Board

- Abdul Rahim, Ruzairi**, Universiti Teknologi, Malaysia  
**Ahmad, Mohd Noor**, Northern University of Engineering, Malaysia  
**Annamalai, Karthigeyan**, National Institute of Advanced Industrial Science and Technology, Japan  
**Arcega, Francisco**, University of Zaragoza, Spain  
**Arguel, Philippe**, CNRS, France  
**Ahn, Jae-Pyoung**, Korea Institute of Science and Technology, Korea  
**Arndt, Michael**, Robert Bosch GmbH, Germany  
**Ascoli, Giorgio**, George Mason University, USA  
**Atalay, Selcuk**, Inonu University, Turkey  
**Atghiaee, Ahmad**, University of Tehran, Iran  
**Augutis, Vygtantas**, Kaunas University of Technology, Lithuania  
**Avachit, Patil Lalchand**, North Maharashtra University, India  
**Ayesh, Aladdin**, De Montfort University, UK  
**Azamimi, Azian binti Abdullah**, Universiti Malaysia Perlis, Malaysia  
**Bahreyni, Behraad**, University of Manitoba, Canada  
**Baliga, Shankar, B.**, General Motors Transnational, USA  
**Baoxian, Ye**, Zhengzhou University, China  
**Barford, Lee**, Agilent Laboratories, USA  
**Barlingay, Ravindra**, RF Arrays Systems, India  
**Basu, Sukumar**, Jadavpur University, India  
**Beck, Stephen**, University of Sheffield, UK  
**Ben Bouzid, Sihem**, Institut National de Recherche Scientifique, Tunisia  
**Benachaiba, Chellali**, Universitè de Bechar, Algeria  
**Binnie, T. David**, Napier University, UK  
**Bischoff, Gerlinde**, Inst. Analytical Chemistry, Germany  
**Bodas, Dhananjay**, IMTEK, Germany  
**Borges Carval, Nuno**, Universidade de Aveiro, Portugal  
**Bouchikhi, Benachir**, University Moulay Ismail, Morocco  
**Bousbia-Salah, Mounir**, University of Annaba, Algeria  
**Bouvet, Marcel**, CNRS – UPMC, France  
**Brudzewski, Kazimierz**, Warsaw University of Technology, Poland  
**Cai, Chenxin**, Nanjing Normal University, China  
**Cai, Qingyun**, Hunan University, China  
**Calvo-Gallego, Jaime**, Universidad de Salamanca, Spain  
**Campanella, Luigi**, University La Sapienza, Italy  
**Carvalho, Vitor**, Minho University, Portugal  
**Cecelja, Franjo**, Brunel University, London, UK  
**Cerda Belmonte, Judith**, Imperial College London, UK  
**Chakrabarty, Chandan Kumar**, Universiti Tenaga Nasional, Malaysia  
**Chakravorty, Dipankar**, Association for the Cultivation of Science, India  
**Changhai, Ru**, Harbin Engineering University, China  
**Chaudhari, Gajanan**, Shri Shivaji Science College, India  
**Chavali, Murthy**, N.I. Center for Higher Education, (N.I. University), India  
**Chen, Jiming**, Zhejiang University, China  
**Chen, Rongshun**, National Tsing Hua University, Taiwan  
**Cheng, Kuo-Sheng**, National Cheng Kung University, Taiwan  
**Chiang, Jeffrey (Cheng-Ta)**, Industrial Technol. Research Institute, Taiwan  
**Chiriac, Horia**, National Institute of Research and Development, Romania  
**Chowdhuri, Arijit**, University of Delhi, India  
**Chung, Wen-Yaw**, Chung Yuan Christian University, Taiwan  
**Corres, Jesus**, Universidad Publica de Navarra, Spain  
**Cortes, Camilo A.**, Universidad Nacional de Colombia, Colombia  
**Courtois, Christian**, Universite de Valenciennes, France  
**Cusano, Andrea**, University of Sannio, Italy  
**D'Amico, Arnaldo**, Università di Tor Vergata, Italy  
**De Stefano, Luca**, Institute for Microelectronics and Microsystem, Italy  
**Deshmukh, Kiran**, Shri Shivaji Mahavidyalaya, Barshi, India  
**Dickert, Franz L.**, Vienna University, Austria  
**Dieguez, Angel**, University of Barcelona, Spain  
**Dighavkar, C. G.**, M.G. Vidyamandir's L. V.H. College, India  
**Dimitropoulos, Panos**, University of Thessaly, Greece  
**Ding, Jianning**, Jiangsu Polytechnic University, China  
**Djordjevich, Alexander**, City University of Hong Kong, Hong Kong  
**Donato, Nicola**, University of Messina, Italy  
**Donato, Patricio**, Universidad de Mar del Plata, Argentina  
**Dong, Feng**, Tianjin University, China  
**Drljaca, Predrag**, Instersema Sensoric SA, Switzerland  
**Dubey, Venketesh**, Bournemouth University, UK  
**Enderle, Stefan**, Univ. of Ulm and KTB Mechatronics GmbH, Germany  
**Erdem, Gursan K. Arzum**, Ege University, Turkey  
**Erkmen, Aydan M.**, Middle East Technical University, Turkey  
**Estelle, Patrice**, Insa Rennes, France  
**Estrada, Horacio**, University of North Carolina, USA  
**Faiz, Adil**, INSA Lyon, France  
**Fericean, Sorin**, Balluff GmbH, Germany  
**Fernandes, Joana M.**, University of Porto, Portugal  
**Francioso, Luca**, CNR-IMM Institute for Microelectronics and Microsystems, Italy  
**Francis, Laurent**, University Catholique de Louvain, Belgium  
**Fu, Weiling**, South-Western Hospital, Chongqing, China  
**Gaura, Elena**, Coventry University, UK  
**Geng, Yanfeng**, China University of Petroleum, China  
**Gole, James**, Georgia Institute of Technology, USA  
**Gong, Hao**, National University of Singapore, Singapore  
**Gonzalez de la Rosa, Juan Jose**, University of Cadiz, Spain  
**Granell, Annette**, Goteborg University, Sweden  
**Graff, Mason**, The University of Texas at Arlington, USA  
**Guan, Shan**, Eastman Kodak, USA  
**Guillet, Bruno**, University of Caen, France  
**Guo, Zhen**, New Jersey Institute of Technology, USA  
**Gupta, Narendra Kumar**, Napier University, UK  
**Hadjiloucas, Sillas**, The University of Reading, UK  
**Haider, Mohammad R.**, Sonoma State University, USA  
**Hashsham, Syed**, Michigan State University, USA  
**Hasni, Abdelhafid**, Bechar University, Algeria  
**Hernandez, Alvaro**, University of Alcalá, Spain  
**Hernandez, Wilmar**, Universidad Politecnica de Madrid, Spain  
**Homentcovschi, Dorel**, SUNY Binghamton, USA  
**Horstman, Tom**, U.S. Automation Group, LLC, USA  
**Hsiai, Tzung (John)**, University of Southern California, USA  
**Huang, Jeng-Sheng**, Chung Yuan Christian University, Taiwan  
**Huang, Star**, National Tsing Hua University, Taiwan  
**Huang, Wei**, PSG Design Center, USA  
**Hui, David**, University of New Orleans, USA  
**Jaffrezic-Renault, Nicole**, Ecole Centrale de Lyon, France  
**James, Daniel**, Griffith University, Australia  
**Janting, Jakob**, DELTA Danish Electronics, Denmark  
**Jiang, Liudi**, University of Southampton, UK  
**Jiang, Wei**, University of Virginia, USA  
**Jiao, Zheng**, Shanghai University, China  
**John, Joachim**, IMEC, Belgium  
**Kalach, Andrew**, Voronezh Institute of Ministry of Interior, Russia  
**Kang, Moonho**, Sunmoon University, Korea South  
**Kaniasas, Eugenijus**, Vienna University of Technology, Austria  
**Katake, Anup**, Texas A&M University, USA  
**Kausel, Wilfried**, University of Music, Vienna, Austria  
**Kavasoglu, Nese**, Mugla University, Turkey  
**Ke, Cathy**, Tyndall National Institute, Ireland  
**Khelfaoui, Rachid**, Université de Bechar, Algeria  
**Khan, Asif**, Aligarh Muslim University, Aligarh, India  
**Kim, Min Young**, Kyungpook National University, Korea South  
**Ko, Sang Choon**, Electronics. and Telecom. Research Inst., Korea South  
**Kotulska, Malgorzata**, Wroclaw University of Technology, Poland  
**Kockar, Hakan**, Balikesir University, Turkey  
**Kong, Ing**, RMIT University, Australia  
**Kratz, Henrik**, Uppsala University, Sweden

**Krishnamoorthy, Ganesh**, University of Texas at Austin, USA  
**Kumar, Arun**, University of Delaware, Newark, USA  
**Kumar, Subodh**, National Physical Laboratory, India  
**Kung, Chih-Hsien**, Chang-Jung Christian University, Taiwan  
**Lacnjevac, Caslav**, University of Belgrade, Serbia  
**Lay-Ekuakille, Aime**, University of Lecce, Italy  
**Lee, Jang Myung**, Pusan National University, Korea South  
**Lee, Jun Su**, Amkor Technology, Inc. South Korea  
**Lei, Hua**, National Starch and Chemical Company, USA  
**Li, Fengyuan (Thomas)**, Purdue University, USA  
**Li, Genxi**, Nanjing University, China  
**Li, Hui**, Shanghai Jiaotong University, China  
**Li, Sihua**, Agiltron, Inc., USA  
**Li, Xian-Fang**, Central South University, China  
**Li, Yuefa**, Wayne State University, USA  
**Liang, Yuanchang**, University of Washington, USA  
**Liawruangrath, Saisunee**, Chiang Mai University, Thailand  
**Liew, Kim Meow**, City University of Hong Kong, Hong Kong  
**Lin, Hermann**, National Kaohsiung University, Taiwan  
**Lin, Paul**, Cleveland State University, USA  
**Linderholm, Pontus**, EPFL - Microsystems Laboratory, Switzerland  
**Liu, Aihua**, University of Oklahoma, USA  
**Liu Changgeng**, Louisiana State University, USA  
**Liu, Cheng-Hsien**, National Tsing Hua University, Taiwan  
**Liu, Songqin**, Southeast University, China  
**Lodeiro, Carlos**, University of Vigo, Spain  
**Lorenzo, Maria Encarnacio**, Universidad Autonoma de Madrid, Spain  
**Lukaszewicz, Jerzy Pawel**, Nicholas Copernicus University, Poland  
**Ma, Zhanfang**, Northeast Normal University, China  
**Majstorovic, Vidosav**, University of Belgrade, Serbia  
**Malyshev, V.V.**, National Research Centre 'Kurchatov Institute', Russia  
**Marquez, Alfredo**, Centro de Investigacion en Materiales Avanzados, Mexico  
**Matay, Ladislav**, Slovak Academy of Sciences, Slovakia  
**Mathur, Prafull**, National Physical Laboratory, India  
**Maurya, D.K.**, Institute of Materials Research and Engineering, Singapore  
**Mekid, Samir**, University of Manchester, UK  
**Melnyk, Ivan**, Photon Control Inc., Canada  
**Mendes, Paulo**, University of Minho, Portugal  
**Mennell, Julie**, Northumbria University, UK  
**Mi, Bin**, Boston Scientific Corporation, USA  
**Minas, Graca**, University of Minho, Portugal  
**Mishra, Vivekanand**, National Institute of Technology, India  
**Moghavvemi, Mahmoud**, University of Malaya, Malaysia  
**Mohammadi, Mohammad-Reza**, University of Cambridge, UK  
**Molina Flores, Esteban**, Benemérita Universidad Autónoma de Puebla, Mexico  
**Moradi, Majid**, University of Kerman, Iran  
**Morello, Rosario**, University "Mediterranea" of Reggio Calabria, Italy  
**Mounir, Ben Ali**, University of Sousse, Tunisia  
**Mrad, Nezih**, Defence R&D, Canada  
**Mulla, Imtiaz Sirajuddin**, National Chemical Laboratory, Pune, India  
**Nabok, Aleksey**, Sheffield Hallam University, UK  
**Neelamegam, Periasamy**, Sastra Deemed University, India  
**Neshkova, Milka**, Bulgarian Academy of Sciences, Bulgaria  
**Oberhammer, Joachim**, Royal Institute of Technology, Sweden  
**Ould Lahoucine, Cherif**, University of Guelma, Algeria  
**Pamidighanta, Sayanu**, Bharat Electronics Limited (BEL), India  
**Pan, Jisheng**, Institute of Materials Research & Engineering, Singapore  
**Park, Joon-Shik**, Korea Electronics Technology Institute, Korea South  
**Passaro, Vittorio M. N.**, Politecnico di Bari, Italy  
**Penza, Michele**, ENEA C.R., Italy  
**Pereira, Jose Miguel**, Instituto Politecnico de Seteбал, Portugal  
**Petsev, Dimiter**, University of New Mexico, USA  
**Pogacnik, Lea**, University of Ljubljana, Slovenia  
**Post, Michael**, National Research Council, Canada  
**Prance, Robert**, University of Sussex, UK  
**Prasad, Ambika**, Gulbarga University, India  
**Prateepasen, Asa**, Kingmoungut's University of Technology, Thailand  
**Pugno, Nicola M.**, Politecnico di Torino, Italy  
**Pullini, Daniele**, Centro Ricerche FIAT, Italy  
**Pumera, Martin**, National Institute for Materials Science, Japan  
**Radhakrishnan, S.**, National Chemical Laboratory, Pune, India  
**Rajanna, K.**, Indian Institute of Science, India  
**Ramadan, Qasem**, Institute of Microelectronics, Singapore  
**Rao, Basuthkar**, Tata Inst. of Fundamental Research, India  
**Raoof, Kosai**, Joseph Fourier University of Grenoble, France  
**Rastogi Shiva, K.**, University of Idaho, USA  
**Reig, Candid**, University of Valencia, Spain  
**Restivo, Maria Teresa**, University of Porto, Portugal  
**Robert, Michel**, University Henri Poincare, France  
**Rezazadeh, Ghader**, Urmia University, Iran  
**Royo, Santiago**, Universitat Politècnica de Catalunya, Spain  
**Rodriguez, Angel**, Universitat Politècnica de Catalunya, Spain  
**Rothberg, Steve**, Loughborough University, UK  
**Sadana, Ajit**, University of Mississippi, USA  
**Sadeghian Marnani, Hamed**, TU Delft, The Netherlands  
**Sapozhnikova, Ksenia**, D.I.Mendeleyev Institute for Metrology, Russia  
**Sandacci, Serghei**, Sensor Technology Ltd., UK  
**Saxena, Vibha**, Bbhba Atomic Research Centre, Mumbai, India  
**Schneider, John K.**, Ultra-Scan Corporation, USA  
**Sengupta, Deepak**, Advance Bio-Photonics, India  
**Seif, Selemani**, Alabama A & M University, USA  
**Seifter, Achim**, Los Alamos National Laboratory, USA  
**Shah, Kriyang**, La Trobe University, Australia  
**Sankarraaj, Anand**, Detector Electronics Corp., USA  
**Silva Giroa, Pedro**, Technical University of Lisbon, Portugal  
**Singh, V. R.**, National Physical Laboratory, India  
**Slomovitz, Daniel**, UTE, Uruguay  
**Smith, Martin**, Open University, UK  
**Soleimanpour, Amir Masoud**, University of Toledo, USA  
**Soleymanpour, Ahmad**, University of Toledo, USA  
**Somani, Prakash R.**, Centre for Materials for Electronics Technol., India  
**Sridharan, M.**, Sastra University, India  
**Srinivas, Talabattula**, Indian Institute of Science, Bangalore, India  
**Srivastava, Arvind K.**, NanoSonix Inc., USA  
**Stefan-van Staden, Raluca-Ioana**, University of Pretoria, South Africa  
**Stefanescu, Dan Mihai**, Romanian Measurement Society, Romania  
**Sumriddetchka, Sarun**, National Electronics and Comp. Technol. Center, Thailand  
**Sun, Chengliang**, Polytechnic University, Hong-Kong  
**Sun, Dongming**, Jilin University, China  
**Sun, Junhua**, Beijing University of Aeronautics and Astronautics, China  
**Sun, Zhiqiang**, Central South University, China  
**Suri, C. Raman**, Institute of Microbial Technology, India  
**Sysoev, Victor**, Saratov State Technical University, Russia  
**Szewczyk, Roman**, Industr. Research Inst. for Automation and Measurement, Poland  
**Tan, Ooi Kiang**, Nanyang Technological University, Singapore  
**Tang, Dianping**, Southwest University, China  
**Tang, Jaw-Luen**, National Chung Cheng University, Taiwan  
**Teker, Kasif**, Frostburg State University, USA  
**Thirunavukkarasu, I.**, Manipal University Karnataka, India  
**Thumbavanam Pad, Kartik**, Carnegie Mellon University, USA  
**Tian, Gui Yun**, University of Newcastle, UK  
**Tsiantos, Vassilios**, Technological Educational Institute of Kaval, Greece  
**Tsigara, Anna**, National Hellenic Research Foundation, Greece  
**Twomey, Karen**, University College Cork, Ireland  
**Valente, Antonio**, University, Vila Real, - U.T.A.D., Portugal  
**Vanga, Raghav Rao**, Summit Technology Services, Inc., USA  
**Vaseashta, Ashok**, Marshall University, USA  
**Vazquez, Carmen**, Carlos III University in Madrid, Spain  
**Vieira, Manuela**, Instituto Superior de Engenharia de Lisboa, Portugal  
**Vigna, Benedetto**, STMicroelectronics, Italy  
**Vrba, Radimir**, Brno University of Technology, Czech Republic  
**Wandelt, Barbara**, Technical University of Lodz, Poland  
**Wang, Jiangping**, Xi'an Shiyou University, China  
**Wang, Kedong**, Beihang University, China  
**Wang, Liang**, Pacific Northwest National Laboratory, USA  
**Wang, Mi**, University of Leeds, UK  
**Wang, Shinn-Fwu**, Ching Yun University, Taiwan  
**Wang, Wei-Chih**, University of Washington, USA  
**Wang, Wensheng**, University of Pennsylvania, USA  
**Watson, Steven**, Center for NanoSpace Technologies Inc., USA  
**Weiping, Yan**, Dalian University of Technology, China  
**Wells, Stephen**, Southern Company Services, USA  
**Wolkenberg, Andrzej**, Institute of Electron Technology, Poland  
**Woods, R. Clive**, Louisiana State University, USA  
**Wu, DerHo**, National Pingtung Univ. of Science and Technology, Taiwan  
**Wu, Zhaoyang**, Hunan University, China  
**Xiu Tao, Ge**, Chuzhou University, China  
**Xu, Lisheng**, The Chinese University of Hong Kong, Hong Kong  
**Xu, Sen**, Drexel University, USA  
**Xu, Tao**, University of California, Irvine, USA  
**Yang, Dongfang**, National Research Council, Canada  
**Yang, Shuang-Hua**, Loughborough University, UK  
**Yang, Wuqiang**, The University of Manchester, UK  
**Yang, Xiaoling**, University of Georgia, Athens, GA, USA  
**Yaping Dan**, Harvard University, USA  
**Ymeti, Aurel**, University of Twente, Netherland  
**Yong Zhao**, Northeastern University, China  
**Yu, Haihu**, Wuhan University of Technology, China  
**Yuan, Yong**, Massey University, New Zealand  
**Yufera Garcia, Alberto**, Seville University, Spain  
**Zakaria, Zulkarnay**, University Malaysia Perlis, Malaysia  
**Zagnoni, Michele**, University of Southampton, UK  
**Zamani, Cyrus**, Universitat de Barcelona, Spain  
**Zeni, Luigi**, Second University of Naples, Italy  
**Zhang, Minglong**, Shanghai University, China  
**Zhang, Quintao**, University of California at Berkeley, USA  
**Zhang, Weiping**, Shanghai Jiao Tong University, China  
**Zhang, Wenming**, Shanghai Jiao Tong University, China  
**Zhang, Xueji**, World Precision Instruments, Inc., USA  
**Zhong, Haoxiang**, Henan Normal University, China  
**Zhu, Qing**, Fujifilm Dimatix, Inc., USA  
**Zorzano, Luis**, Universidad de La Rioja, Spain  
**Zourob, Mohammed**, University of Cambridge, UK

# Contents

Volume 142  
Issue 7  
July 2012

www.sensorsportal.com

ISSN 1726-5479

## Editorial Book Review

### Non-Dispersive Infrared Gas Measurement

*Sergey Y. Yurish, International Frequency Sensor Association (IFSA)* ..... 1

## Research Articles

### Research in Nanothermometry. Part 6. Metrology of Raman Thermometer with Universal Calibration Artifacts

*Bohdan Stadnyk, Svyatoslav Yatsyshyn, Oleh Seheda* ..... 1

### A Survey of Power-Efficient Gathering of Sensor Information System Based Routing Protocols of Wireless Sensor Networks

*Muktar Hussaini, Farhat Anwar, Aisha Hassan A. H.* ..... 10

### Comparative Analysis of Energy-efficient Cluster-based Routing Protocols for Wireless Sensor Networks

*Naveen Kumar V and Santhi Prabha I* ..... 23

### TDMA Based Slotted Medium Access Control Protocol for Wireless Sensor Networks

*Prasan Kumar Sahoo* ..... 33

### Circuit of Data Aggregation on the Fly for WSN

*M. Daoui, M. Lalam, S. Hamrioui B. Djamah and D. Nouali* ..... 44

### Dynamic Analysis of Wireless Sensor Network Programs Based on Binary Tool and Simulator

*Yuxia Sun, Yong Tang* ..... 54

### Circle Intersection Method Combined with Fuzzy Weighted Centroid Method for Localization in WSNs

*Mohan Kumar J, P.R. Venkateswaran, N. Gopalakrishna Kini, Sundaresan C.* ..... 61

### Development of an Automatic Wireless System Applied for Soil Temperature Measurement

*S. Makhlof, M. Laghrouche* ..... 69

### Theoretical Analysis to Capacitance of RF MEMS Clamped-Clamped Capacitive Switch

*Tian-Jie, Cao* ..... 76

### Deployment of Wireless Sensor Network for the Measurement of Exhaled Nitric Oxide in In-home Healthcare

*Elango Surendran, Mathivanan Natarajan, Arun Venkatesh Krishna, Vairamani Kanagavel, Karunakaran Chandran, Madasamy Thangamuthu, Pandiaraj Manickam.* ..... 87

### Wireless Communication Solution for Health Care Equipment

*Tiago Faustino Andrade, Manuel Rodrigues Quintas, Carlos Moreira da Silva, Maria Teresa Restivo, Maria de Fátima Chouzal and Teresa Maria Amaral* ..... 95

<b>Lateral Control of Aircraft, Considering the Cross-coupling Effect of Yaw and Roll on Each-other Using Fuzzy Logic</b> <i>Vishnu G. Nair, V. I. George, Prahlad K. R.</i> .....	105
<b>A Parametric Study of S- tube Coriolis Mass Flow Meter</b> <i>Arvind K. Rajput, Satish C. Sharma, Marut Shukla, Souvik Roy</i> .....	118
<b>Calibration Method on Machine for Multi-axis Heavy Force Sensor</b> <i>Wei liu, Zhenyuan jia and Qi li</i> .....	130
<b>TiO<sub>2</sub> Thin Film Capacitive Humidity Sensor Based on Sol-gel Technique</b> <i>Manju Pandey, Debdulal Saha, Kamalendu Sengupta, S. S. Islam</i> .....	143

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: editor@sensorsportal.com  
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).


## Inertial Combo Sensors for Consumer & Automotive

### Technology, Applications, Industry & Market Report to 2016



*This report is focused on the analysis of the opportunities and the challenges for inertial combo sensors in those high-volume market areas.*

[http://www.sensorsportal.com/HTML/Inertial\\_Combo\\_Sensors\\_Market.htm](http://www.sensorsportal.com/HTML/Inertial_Combo_Sensors_Market.htm)

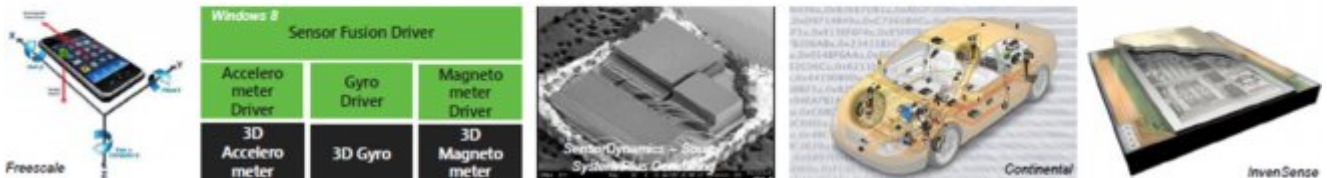

## Uncooled Infrared Imaging Market: Commercial & Military applications

### Market & Technology Report to 2016



*This new 2011 IR report, is an updated and in depth analysis of commercial markets covered in the 2010 report in addition we have included a new analysis of the military markets.*

[http://www.sensorsportal.com/HTML/Detectors\\_for\\_Thermography.htm](http://www.sensorsportal.com/HTML/Detectors_for_Thermography.htm)





## Circle Intersection Method Combined with Fuzzy Weighted Centroid Method for Localization in WSNs

**Mohan Kumar J, \*\* P. R. Venkateswaran, \* N. Gopalakrishna Kini, Sundaresan C.**

Manipal Centre for Information Sciences, Manipal, India

\* Manipal Institute of Technology, Manipal, India

\*\* Welding Research Institute, Tiruchirappalli, India

E-mail: [prv\\_i@yahoo.com](mailto:prv_i@yahoo.com)

*Received: 2 May 2012 /Accepted: 23 July 2012 /Published: 31 July 2012*

---

**Abstract:** Wireless Sensor Networks (WSNs) are being used for a large number of location-dependent applications, where the measurement data is meaningless without accurate location of its origin. In many of these applications, where coarse accuracy is sufficient, range free localization techniques are being pursued as low cost alternative to the range based localization techniques. In this paper, we present range free Circle intersection combined with fuzzy weighted centroid method for localization. It's an effective soft computing and geometric algorithm for localization. Result of implementation show that this algorithm can be a better substitution for current methods because of lower expense and simple implementation. In these proposed techniques, we consider the edge weight of each anchor node separately and combine them to compute the location of sensor nodes. The edge weights are modeled by the fuzzy logic systems. The simulation results demonstrate the effectiveness of proposed schemes. *Copyright © 2012 IFSA.*

**Keywords:** Centroid localization, Fuzzy logic systems, Circle intersection, Range-free localization, Wireless sensor networks.

---

### 1. Introduction

Wireless sensor network is a network consisting of thousands of sensors within a particular area. These sensors are able to communicate with each other. They can detect different objects, collect information, and transmit messages. Nowadays, sensor network technologies have become very important especially for applications such as environmental monitoring, military systems, and disaster management. Despite many advantages, these sensors are usually small in size and have many physical

limitations. For instance, in many applications it is crucial to know a node's location. Clearly, the most accurate and reliable way to obtain this information is to equip each node with a GPS receiver.

However, this method is expensive and not feasible for sensor nodes due to the power constraint. To solve this constraint, researchers have developed many localization methods in which instead of requiring every node to have GPS installed, only a few nodes are equipped with GPS hardware. These nodes are called anchor nodes and they know their exact positions. Other normal sensors then obtain distance information through talking to each other and derive their positions based on the information. Two main methodologies of distributed localization are range-based and range-free localization. Range-based localization [1], are hardware intensive methods which localize a sensor node using techniques such as time of arrival (TOA), time difference of arrival of two different signals (TDOA), and angle of arrival (AOA).

Although the range-free approaches [2], [4] normally produce less accurate location results than the range-based approaches, they are more economic and provide simpler estimates. Bulusu et al. presented a range-free, proximity based localization algorithm [2]. In his method, the anchor nodes broadcast their position and each sensor node computes its position as a centroid of the positions of all the connected anchor nodes to itself. This method is simple and economic but it contains a large amount of error. Kim and Kwon [4] proposed an improved version of [2]. In their method, anchor nodes are weighted according to their proximity to the sensor nodes, and each sensor node computes its position as a weighted centroid of the positions of all connected anchor nodes to itself. This method has less error than the previous one but its performance is highly related to the design of the weights while the choice of the weights is heuristic. Sukhyun Yun et al. [5] presented some intelligent localization approaches to improve accuracy of position estimation.

In this paper we propose range free localization techniques for WSNs based on circle intersection combined with fuzzy systems. This algorithm works based on the number of reference nodes having the each sensor node. Circle intersection method is applicable, when the reference nodes of the sensor node are three or more than three. Fuzzy weighted centroid method is applicable, when the reference nodes of the sensor node are two or less than two. The localization is decomposed into a collection of individual problems in which we compute the proximity of a sensor node to each anchor node. That is, we consider the edge weight of each anchor node separately and combine them to compute the location of the sensor nodes. The edge weights are modeled by the fuzzy logic system (FLS). Which requires no additional hardware in sensor node as it is available as part of physical layer of sensor node.

The rest of the paper is organized as follows: In section 2, centroid method and weighted centroid method is introduced and Fuzzy logic system. In section 3 proposed localization techniques is presented. In Section 4, simulation environment and results are discussed. Finally, conclusions are drawn in Section 5.

## 2. Background

### 2.1. Centroid Localization

Centroid localization technique uses the knowledge of adjacent connected anchor node position  $(X_i, Y_i)$  to estimate the location of sensor node. In this method, the anchor nodes transmit a beacon containing their respective location information. The sensor node computes its position as centroid of the positions of all the adjacent connected anchor nodes to itself

$$(X_{est}, Y_{est}) = \left( \frac{X_1 + X_2 + \dots + X_n}{n}, \frac{Y_1 + Y_2 + \dots + Y_n}{n} \right) \quad (1)$$

where  $(X_{est}, Y_{est})$  represents the estimated position of the sensor node and N is the number of adjacent connected anchor nodes to the sensor node. The method of location estimation using centroid algorithm is very simple and economic, but the results shows that location estimation error is very large in this method and is unacceptable in case of application requiring accurate localization of sensor nodes.

## 2.2 Weighted Centroid Localization

An improved version of centroid algorithm is weighted centroid method [5]. In this method, location of sensor node is calculated by edge weights of anchor nodes connected to the sensor node, and each sensor node computes its position by:

$$(X_{est}, Y_{est}) = \left( \frac{W_1 \cdot X_1 + \dots + W_n \cdot X_n}{\sum_{i=1}^n W_i}, \frac{W_1 \cdot Y_1 + \dots + W_n \cdot Y_n}{\sum_{i=1}^n W_i} \right) \quad (2)$$

where  $W_i$  is the edge weight of  $i^{\text{th}}$  anchor node connected to the sensor node. The edge weight is decided based upon the proximity of anchor node to the sensor node. Performance of this approach highly depends on the optimization of edge weights.

## 2.3. Fuzzy Logic Systems

Fuzzy inference is the process of formulating the mapping from a given input to an output using fuzzy logic. The mapping then provides a basis from which decisions can be made, or patterns discerned. The process of fuzzy inference involves the Membership Functions, Logical Operations, and If-Then Rules. Fuzzy logic inference system is very simple approach for designing of edge weights for anchor nodes. A fuzzy logic system (Fig. 1) consists of a fuzzifier, some fuzzy IF–THEN rules, a fuzzy inference engine and a defuzzifier.

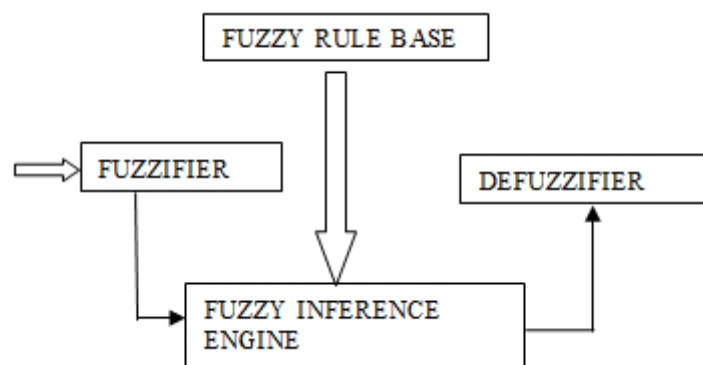


Fig. 1. Fuzzy Logic System.

## 3. Proposed Circle Intersection Method Combined with Fuzzy Weighted Centroid Method

In the proposed method, we are finding the exact position of sensor nodes using circle intersection with fuzzy weighted method. Anchor node having a limited propagation range, it will be heard from any node inside a circle centered on the emitting anchor node. However, the circle approach is close to the reality. An implemented approach was the circles intersection. Each node listens to the beacons in

his neighborhood, and collects their position. As the beacon range is known, the node applies a simple algorithm: the node will here compute the intersection of all the broadcasting circles of the nodes he hears, and computes the intersection of the circles.

### 3.1. Finding the Adjacent Reference Nodes

WSN consists of a set of sensor nodes deployed randomly in vast area to monitor the parameters of interest. These nodes can be categorized as: anchor nodes and normal sensor nodes. Anchor nodes are special type of nodes embedded with GPS or other facility to obtain their position within the network. If feasible these nodes can also be placed manually at known positions within the network. The position of anchor nodes is assumed as  $(X_1, Y_1), (X_2, Y_2), \dots, (X_n, Y_n)$ . Anchor nodes transmit periodic beacon signals containing their respective positions with overlapped region of coverage. Sensor nodes are deployed in the sensing field, with randomly distributed positions. These sensor nodes locate themselves with the help of beacon signals, transmitted by the anchor nodes. Each sensor node collects the RSS information of all connected adjacent anchor nodes through beacon signal and RSSI is used to obtain the edge weight of the anchor node for weighted centroid localization. Following assumptions have been made:

- The anchor nodes know their positions through GPS or by other means such as pre-configuration;
- TDM technique is used to avoid interference of beacons transmitted by anchor nodes;
- The radio propagation is perfectly spherical and the transmission ranges for all radios are identical.

### 3.2. Circle Intersection & Fuzzy Weighted Centroid Method

In this method, the accurate position of the sensor node found out with help of Circle Intersection Method [6]. The distance of the sensor node from the anchor node becomes radius of the circle. Similarly we draw for the other three nearest anchor nodes (reference nodes). The intersection point of these circles will give accurate position of the sensor node. When distance of a sensor node is known only from two anchor nodes, then ambiguity in circle intersection method is removed by fuzzy weighted centroid method. Circle intersection method shown in Fig. 2. Combination of these two methods improves the accuracy of the results.

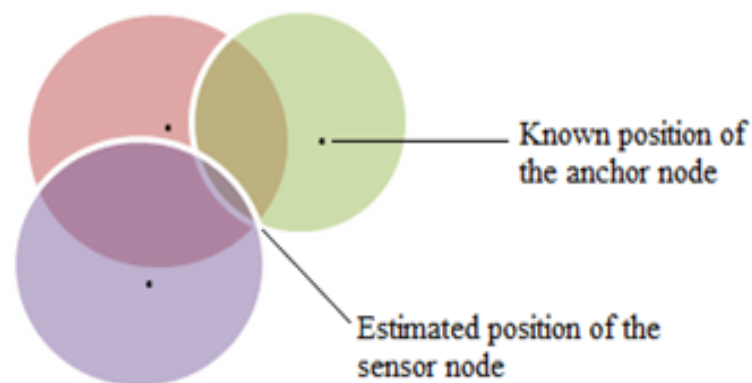


Fig. 2. Circle Intersection Method.

For example  $(X_1, Y_1), (X_2, Y_2)$  and  $(X_3, Y_3)$  are the position of the reference nodes. The distance between the sensor node and three reference nodes is less i.e. ( $\leq 8.94$  m). These distances are radius of the circles. The intersection point of these circles is the exact position of the sensor node.

### 3.3. Computing Localization Error


We characterize the accuracy of the estimate by localization error LE. Let  $(X_{est}, Y_{est})$  be the estimated coordinates of the node, and  $(X_a, Y_a)$  be its real coordinates. The difference between the estimated coordinate and the real coordinate is:

$$LE = \sqrt{[(X_{est} - X_a)]^2 + [(Y_{est} - Y_a)]^2} \quad (3)$$


In this paper, the localization error is expressed in meters.

## 4. Simulation Results


MATLAB has been used for performance evaluation of the proposed schemes in the simulation experiments with following primary network parameters: 60 sensor nodes with unknown position and 121 anchor nodes with known position are distributed randomly within a  $10 \text{ m} \times 10 \text{ m}$  area. The transmission range of all anchor nodes is assumed to be 8.94 m. A sensor node is assumed to be in the proximity of adjacent anchor nodes if its distance from the anchor node is smaller than the transmission range. In this paper, we have simulated three existing localization techniques for comparison with the proposed localization technique. Same simulation setup has been used for all the techniques for comparison of results. Following localization techniques have been simulated: A) the simple centroid approach, (Fig. 4) B) the weighted centroid approach, (Fig. 5) C) Fuzzy Weighted centroid method (Fig. 6), D) the combination of circle intersection and Fuzzy weighted centroid method approach (Fig. 7). Fig 3 shows the simulation setup. The error comparison graphs are plotted in Fig. 8 through Fig. 11 detailing the differences of error when the conventional method is improved by using weighted centroid (as in Fig. 8 and Fig. 9) and when fuzzy logic is improved upon by using centroid method (as in Fig. 10 and Fig. 11). The results are consolidated in Table 1.

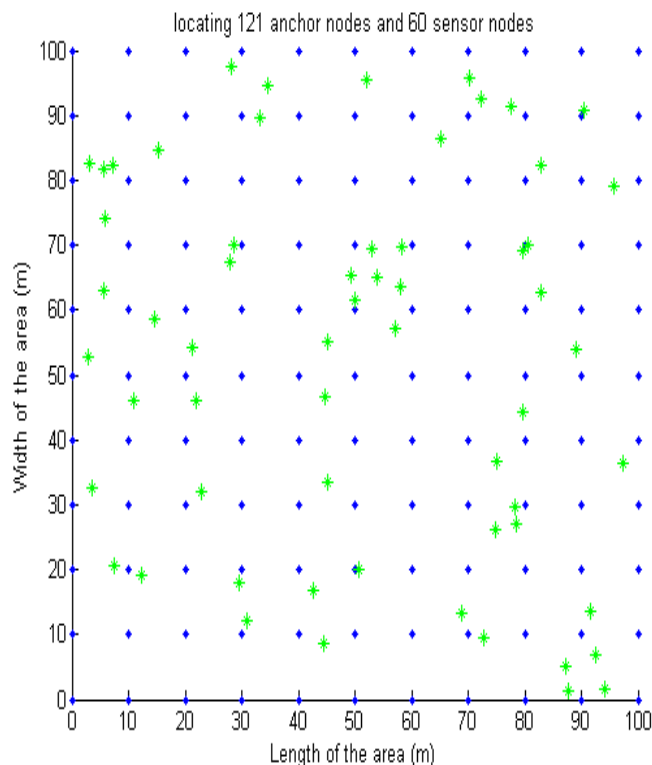


**Fig. 3.** Nodes distribution.

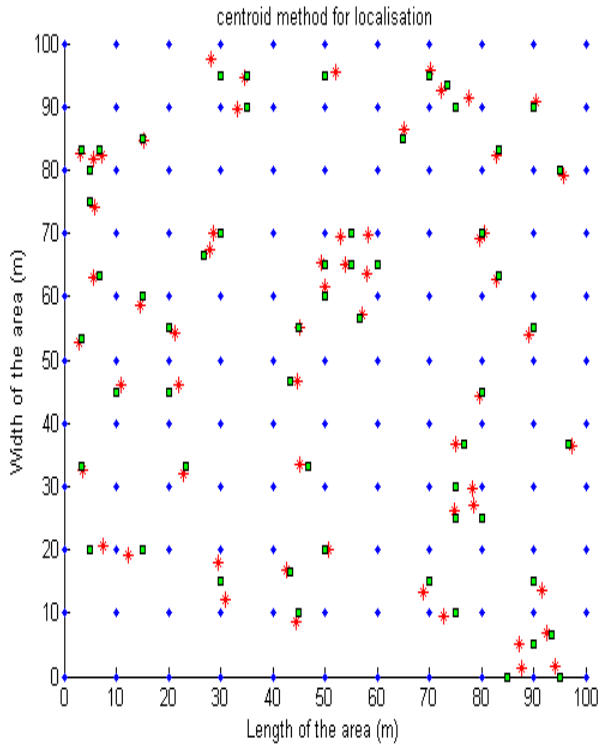


**Fig. 4.** Location Estimation Results (Centroid).

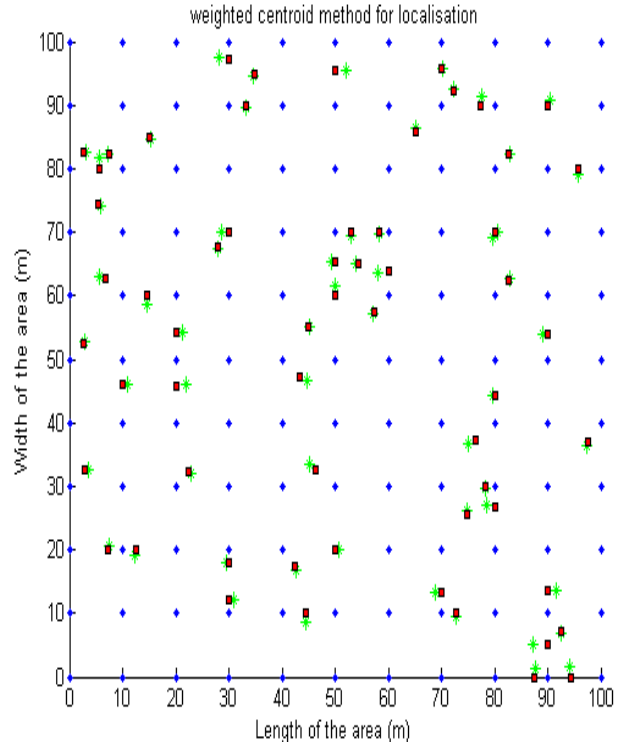

**Fig. 5.** Location Estimation Results (Weighted Centroid).

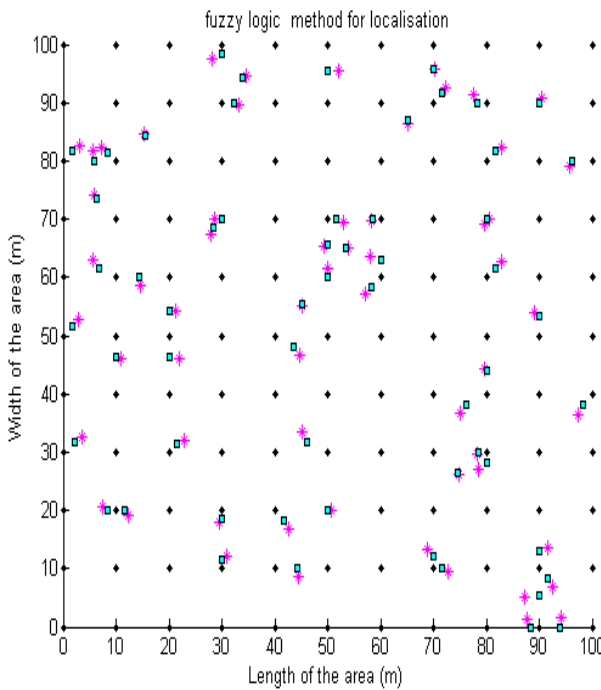

**Fig. 6.** Location Estimation Results (Fuzzy weighted centroid).

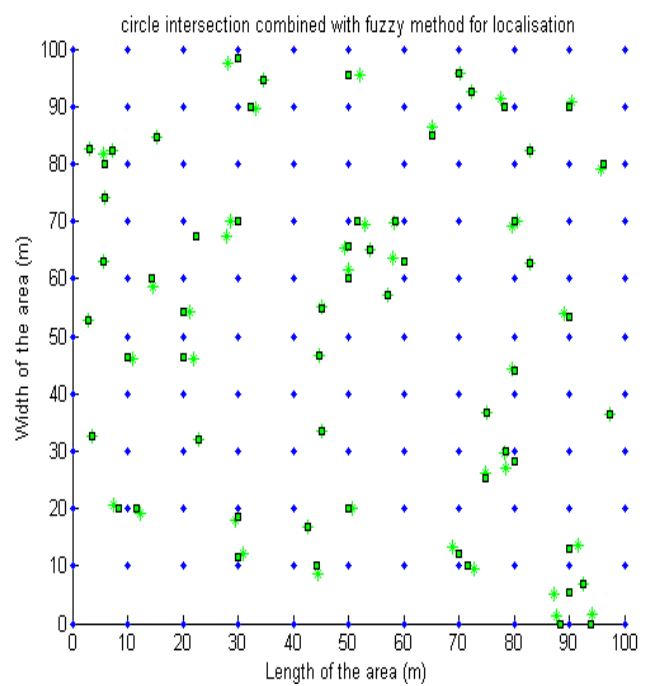

**Fig. 7.** Location Estimation Results (Circle Intersection with Fuzzy logic).

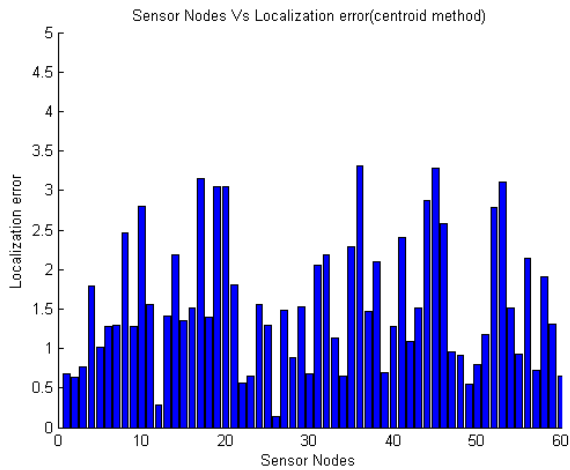


Fig. 8. Error Results (Centroid Method).

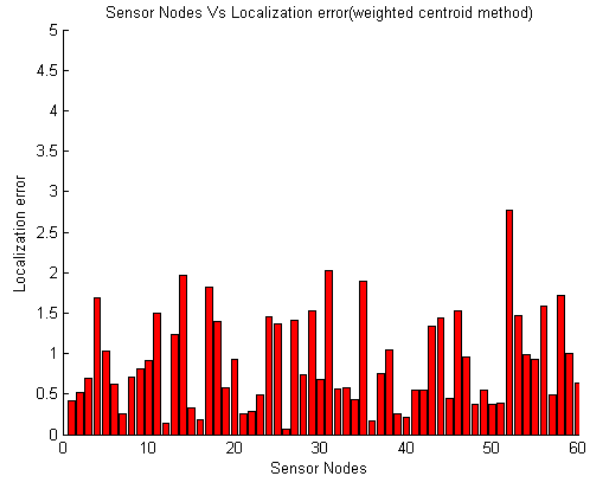


Fig. 9. Error Results (Weighted Centroid Method).

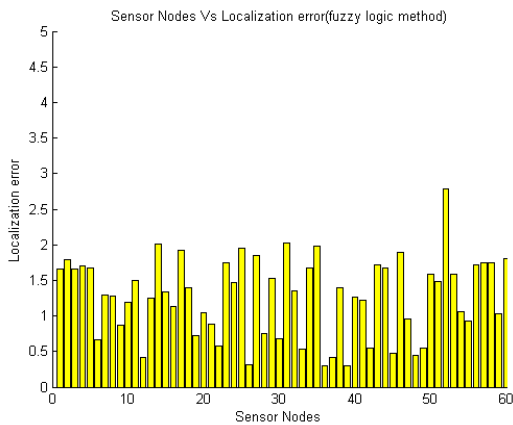


Fig. 10. Error Results (FL method).

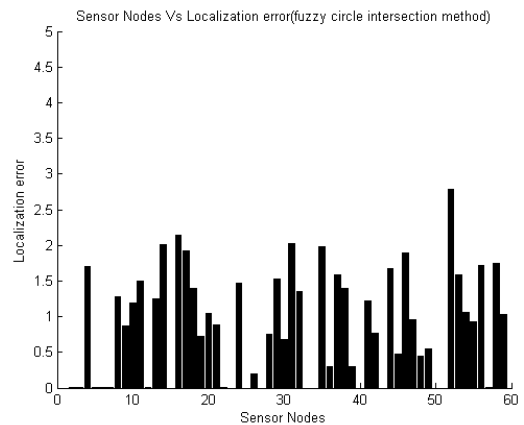


Fig. 11. Error Results (FL Weighted centroid).

Table 1. Comparison of Simulation Results.

Methods	Max. Error	Min. Error	Average Error
Centroid	3.2856	0.2788	1.728685
Weighted Centroid	2.7769	0.2061	0.900102
Fuzzy Logic Method	2.7789	0.3023	1.274080
Circle Intersection With Fuzzy Logic Method	2.7790	0.0000	0.893821

## 5. Conclusion

In this paper, one range free localization scheme for wireless sensor networks (WSNs) is presented. In our proposed method, the sensor nodes do not need any complicated hardware to obtain the distance or TOA/AOA information. The sensor nodes can estimate their positions with the weights of neighbor anchor nodes and intersection of circle (reference node) method. The above proposed method is very simple and effective. It is an extension of the weighted centroid method and fuzzy logic method.

## References

- [1]. Bahl & Padmanabhan, V. N., RADAR: An in building RF-based user location and tracking system, in *Proceedings of the IEEE INFOCOM 2000*, Tel Aviv, Israel, March, 2000.
- [2]. N. Bulusu, J. Heidemann, and D. Estrin, GPS-less low cost outdoor localization for very small devices, *IEEE Personal Communication Magazine*, Vol. 7, pp. 28-34, Oct. 2008.
- [3]. Yun, J. Lee, W. Chung E. Kim, Centroid localization method in wireless sensor networks using TSK fuzzy modelling, in *Proceedings of the International Symposium on Advanced Intelligent Systems*, pp. 971-974, 2008.
- [4]. S. Y. Kim, O. H. Kwon, Location estimation based on edge weights in wireless sensor networks, *Journal of Korea Information and Communication Society*, Vol. 30, 2005.
- [5]. Y. Sukhyun, L. Jaehun, and Wooyong, A soft computing approach to localization in wireless sensor networks, *Expert System with Applications*, Vol. 36, 2009, pp. 7552-7561.
- [6]. Fatemeh. N & Mohammad, Improved Circles Intersection Algorithm for Localization in WSN, in *Proceedings of the 11<sup>th</sup> ACIS International Conference on Software Engineering*, 2010.
- [7]. Zhi liu, Han-Xiong, A probabilistic fuzzy logic system for modeling control, *IEEE Trans. Fuzzy Systems*, Vol. 13, pp. 848-859, 2005.

---

2012 Copyright ©, International Frequency Sensor Association (IFSA). All rights reserved.  
(<http://www.sensorsportal.com>)

## International Frequency Sensor Association



**International Frequency Sensor Association (IFSA)** is a professional association, created with the aim to encourage the researches and developments in the area of quasi-digital and digital smart sensors and transducers.

**IFSA Membership is open to all organizations and individuals worldwide who have a vested interest in promoting or exploiting smart sensors and transducers and are able to contribute expertise in areas relevant to sensors technology.**

More than 600 members from 63 countries world-wide including ABB, Analog Devices, Honeywell, Bell Technologies, John Deere, Endevco, IMEC, Keller, Mazda, Melexis, Memsis, Motorola, PCB Piezotronics, Philips Research, Robert-Bosch GmbH, Sandia Labs, Yokogawa, NASA, US Navy, National Institute of Standard & Technology (NIST), National Research Council, etc.



For more information about IFSA membership, visit  
<http://www.sensorsportal.com>

## Guide for Contributors

---

### Aims and Scope

*Sensors & Transducers Journal* (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because of it is a peer reviewed international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per year by International Frequency Sensor Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc. Since 2011 the journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in Elsevier products.

### Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.


### Submission of papers

Articles should be written in English. Authors are invited to submit by e-mail [editor@sensorsportal.com](mailto:editor@sensorsportal.com) 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

### Advertising Information

Advertising orders and enquires may be sent to [sales@sensorsportal.com](mailto:sales@sensorsportal.com) Please download also our media kit: [http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2012.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2012.pdf)

***Digital Sensors and Sensor Systems: Practical Design*** will greatly benefit undergraduate and at PhD students, engineers, scientists and researchers in both industry and academia. It is especially suited as a reference guide for practitioners, working for Original Equipment Manufacturers (OEM) electronics market (electronics/hardware), sensor industry, and using commercial-off-the-shelf components, as well as anyone facing new challenges in technologies, and those involved in the design and creation of new digital sensors and sensor systems, including smart and/or intelligent sensors for physical or chemical, electrical or non-electrical quantities.

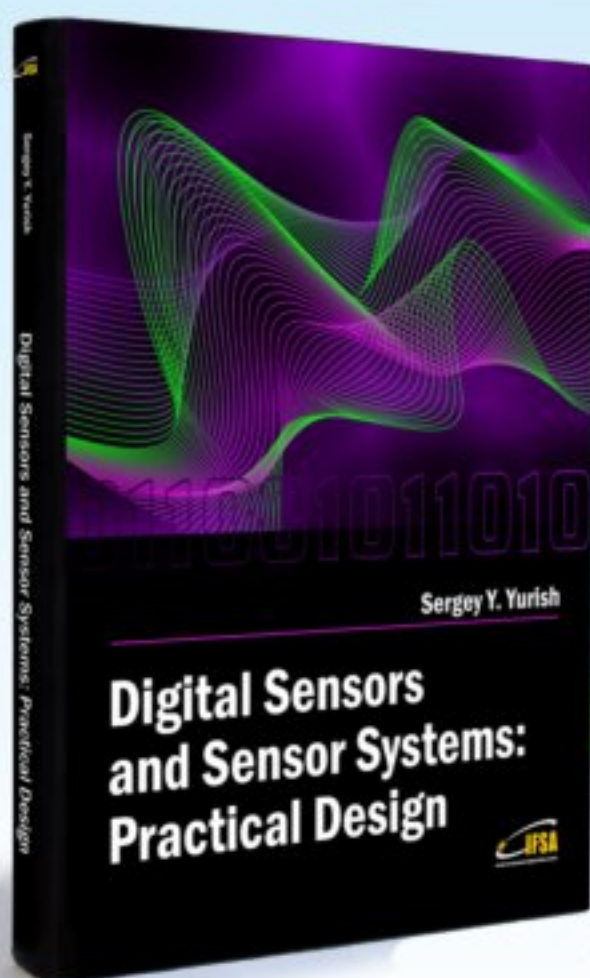

*"It is an outstanding and most completed practical guide about how to deal with frequency, period, duty-cycle, time interval, pulse width modulated, phase-shift and pulse number output sensors and transducers and quickly create various low-cost digital sensors and sensor systems ..."* (from a review)

Order online:

[http://www.sensorsportal.com/HTML/BOOKSTORE/Digital\\_Sensors.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Digital_Sensors.htm)



[www.sensorsportal.com](http://www.sensorsportal.com)