


# SENSORS & TRANSDUCERS

6<sup>vol. 141</sup>  
/12

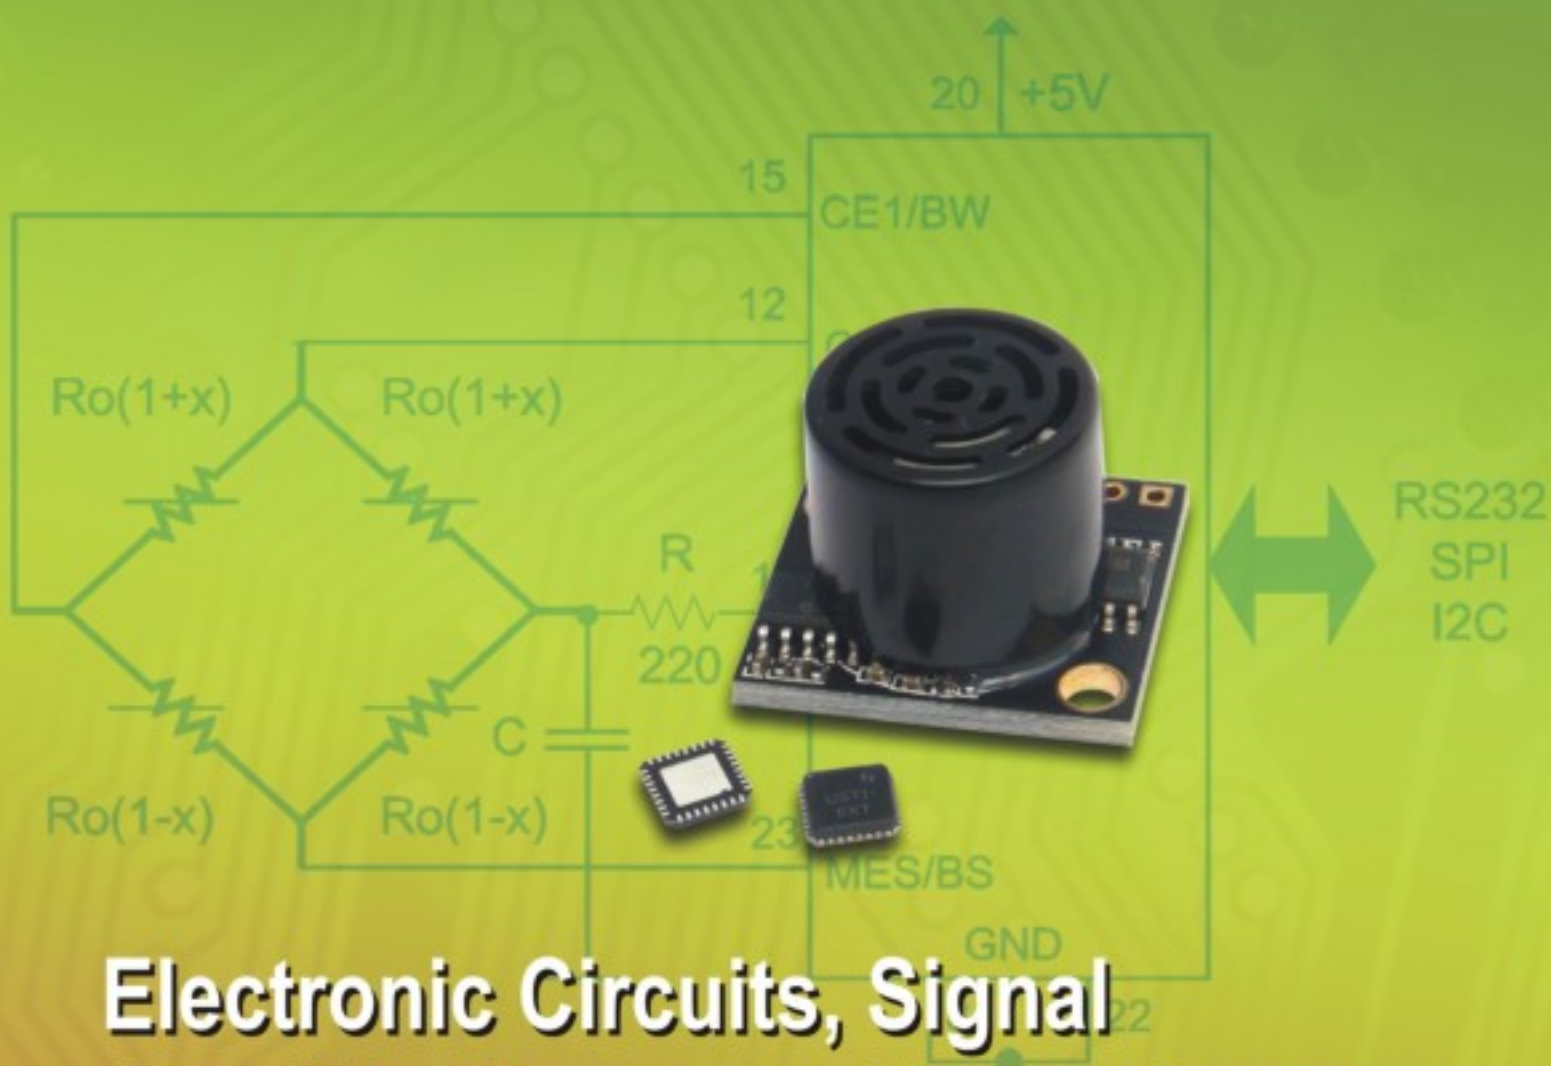

## Electronic Circuits, Signal Conditioning and ASIC for Sensors

**Editors-in-Chief:** professor Sergey Y. Yurish, tel.: +34 696067716, e-mail: editor@sensorsportal.com**Editors for Western Europe**Meijer, Gerard C.M., Delft University of Technology, The Netherlands  
Ferrari, Vittorio, Università di Brescia, Italy**Editors for North America**Datskos, Panos G., Oak Ridge National Laboratory, USA  
Fabien, J. Josse, Marquette University, USA  
Katz, Evgeny, Clarkson University, USA**Editor South America**

Costa-Felix, Rodrigo, Inmetro, Brazil

**Editor for Eastern Europe**

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

**Editor for Asia**

Ohyama, Shinji, Tokyo Institute of Technology, Japan

**Editor for Africa**

Maki K.Habib, American University in Cairo, Egypt

**Editor for Asia-Pacific**

Mukhopadhyay, Subhas, Massey University, New Zealand

**Editorial Advisory Board**

- Abdul Rahim, Ruzairi**, Universiti Teknologi, Malaysia  
**Ahmad, Mohd Noor**, Northern University of Engineering, Malaysia  
**Annamalai, Karthigeyan**, National Institute of Advanced Industrial Science and Technology, Japan  
**Arcega, Francisco**, University of Zaragoza, Spain  
**Arguel, Philippe**, CNRS, France  
**Ahn, Jae-Pyoung**, Korea Institute of Science and Technology, Korea  
**Arndt, Michael**, Robert Bosch GmbH, Germany  
**Ascoli, Giorgio**, George Mason University, USA  
**Atalay, Selcuk**, Inonu University, Turkey  
**Atghiaee, Ahmad**, University of Tehran, Iran  
**Augutis, Vygtantas**, Kaunas University of Technology, Lithuania  
**Avachit, Patil Lalchand**, North Maharashtra University, India  
**Ayesh, Aladdin**, De Montfort University, UK  
**Azamimi, Azian binti Abdullah**, Universiti Malaysia Perlis, Malaysia  
**Bahreyni, Behraad**, University of Manitoba, Canada  
**Baliga, Shankar, B.**, General Motors Transnational, USA  
**Baoxian, Ye**, Zhengzhou University, China  
**Barford, Lee**, Agilent Laboratories, USA  
**Barlingay, Ravindra**, RF Arrays Systems, India  
**Basu, Sukumar**, Jadavpur University, India  
**Beck, Stephen**, University of Sheffield, UK  
**Ben Bouzid, Sihem**, Institut National de Recherche Scientifique, Tunisia  
**Benachaiba, Chellali**, Universitè de Bechar, Algeria  
**Binnie, T. David**, Napier University, UK  
**Bischoff, Gerlinde**, Inst. Analytical Chemistry, Germany  
**Bodas, Dhananjay**, IMTEK, Germany  
**Borges Carval, Nuno**, Universidade de Aveiro, Portugal  
**Bouchikhi, Benachir**, University Moulay Ismail, Morocco  
**Bousbia-Salah, Mounir**, University of Annaba, Algeria  
**Bouvet, Marcel**, CNRS – UPMC, France  
**Brudzewski, Kazimierz**, Warsaw University of Technology, Poland  
**Cai, Chenxin**, Nanjing Normal University, China  
**Cai, Qingyun**, Hunan University, China  
**Calvo-Gallego, Jaime**, Universidad de Salamanca, Spain  
**Campanella, Luigi**, University La Sapienza, Italy  
**Carvalho, Vitor**, Minho University, Portugal  
**Cecelja, Franjo**, Brunel University, London, UK  
**Cerda Belmonte, Judith**, Imperial College London, UK  
**Chakrabarty, Chandan Kumar**, Universiti Tenaga Nasional, Malaysia  
**Chakravorty, Dipankar**, Association for the Cultivation of Science, India  
**Changhai, Ru**, Harbin Engineering University, China  
**Chaudhari, Gajanan**, Shri Shivaji Science College, India  
**Chavali, Murthy**, N.I. Center for Higher Education, (N.I. University), India  
**Chen, Jiming**, Zhejiang University, China  
**Chen, Rongshun**, National Tsing Hua University, Taiwan  
**Cheng, Kuo-Sheng**, National Cheng Kung University, Taiwan  
**Chiang, Jeffrey (Cheng-Ta)**, Industrial Technol. Research Institute, Taiwan  
**Chiriac, Horia**, National Institute of Research and Development, Romania  
**Chowdhuri, Arijit**, University of Delhi, India  
**Chung, Wen-Yaw**, Chung Yuan Christian University, Taiwan  
**Corres, Jesus**, Universidad Publica de Navarra, Spain  
**Cortes, Camilo A.**, Universidad Nacional de Colombia, Colombia  
**Courtois, Christian**, Universite de Valenciennes, France  
**Cusano, Andrea**, University of Sannio, Italy  
**D'Amico, Arnaldo**, Università di Tor Vergata, Italy  
**De Stefano, Luca**, Institute for Microelectronics and Microsystem, Italy  
**Deshmukh, Kiran**, Shri Shivaji Mahavidyalaya, Barshi, India  
**Dickert, Franz L.**, Vienna University, Austria  
**Dieguez, Angel**, University of Barcelona, Spain  
**Dighavkar, C. G.**, M.G. Vidyamandir's L. V.H. College, India  
**Dimitropoulos, Panos**, University of Thessaly, Greece  
**Ding, Jianning**, Jiangsu Polytechnic University, China  
**Djordjevich, Alexandar**, City University of Hong Kong, Hong Kong  
**Donato, Nicola**, University of Messina, Italy  
**Donato, Patricio**, Universidad de Mar del Plata, Argentina  
**Dong, Feng**, Tianjin University, China  
**Drlicja, Predrag**, Instersema Sensoric SA, Switzerland  
**Dubey, Venketesh**, Bournemouth University, UK  
**Enderle, Stefan**, Univ. of Ulm and KTB Mechatronics GmbH, Germany  
**Erdem, Gursan K. Arzum**, Ege University, Turkey  
**Erkmen, Aydan M.**, Middle East Technical University, Turkey  
**Estelle, Patrice**, Insa Rennes, France  
**Estrada, Horacio**, University of North Carolina, USA  
**Faiz, Adil**, INSA Lyon, France  
**Fericean, Sorin**, Balluff GmbH, Germany  
**Fernandes, Joana M.**, University of Porto, Portugal  
**Francioso, Luca**, CNR-IMM Institute for Microelectronics and Microsystems, Italy  
**Francis, Laurent**, University Catholique de Louvain, Belgium  
**Fu, Weiling**, South-Western Hospital, Chongqing, China  
**Gaura, Elena**, Coventry University, UK  
**Geng, Yanfeng**, China University of Petroleum, China  
**Gole, James**, Georgia Institute of Technology, USA  
**Gong, Hao**, National University of Singapore, Singapore  
**Gonzalez de la Rosa, Juan Jose**, University of Cadiz, Spain  
**Granell, Annette**, Goteborg University, Sweden  
**Graff, Mason**, The University of Texas at Arlington, USA  
**Guan, Shan**, Eastman Kodak, USA  
**Guillet, Bruno**, University of Caen, France  
**Guo, Zhen**, New Jersey Institute of Technology, USA  
**Gupta, Narendra Kumar**, Napier University, UK  
**Hadjiloucas, Sillas**, The University of Reading, UK  
**Haider, Mohammad R.**, Sonoma State University, USA  
**Hashsham, Syed**, Michigan State University, USA  
**Hasni, Abdelhafid**, Bechar University, Algeria  
**Hernandez, Alvaro**, University of Alcalá, Spain  
**Hernandez, Wilmar**, Universidad Politecnica de Madrid, Spain  
**Homentcovschi, Dorel**, SUNY Binghamton, USA  
**Horstman, Tom**, U.S. Automation Group, LLC, USA  
**Hsiai, Tzung (John)**, University of Southern California, USA  
**Huang, Jeng-Sheng**, Chung Yuan Christian University, Taiwan  
**Huang, Star**, National Tsing Hua University, Taiwan  
**Huang, Wei**, PSG Design Center, USA  
**Hui, David**, University of New Orleans, USA  
**Jaffrezic-Renault, Nicole**, Ecole Centrale de Lyon, France  
**James, Daniel**, Griffith University, Australia  
**Janting, Jakob**, DELTA Danish Electronics, Denmark  
**Jiang, Liudi**, University of Southampton, UK  
**Jiang, Wei**, University of Virginia, USA  
**Jiao, Zheng**, Shanghai University, China  
**John, Joachim**, IMEC, Belgium  
**Kalach, Andrew**, Voronezh Institute of Ministry of Interior, Russia  
**Kang, Moonho**, Sunmoon University, Korea South  
**Kaniasas, Eugenijus**, Vienna University of Technology, Austria  
**Katake, Anup**, Texas A&M University, USA  
**Kausel, Wilfried**, University of Music, Vienna, Austria  
**Kavasoglu, Nese**, Mugla University, Turkey  
**Ke, Cathy**, Tyndall National Institute, Ireland  
**Khelfaoui, Rachid**, Université de Bechar, Algeria  
**Khan, Asif**, Aligarh Muslim University, Aligarh, India  
**Kim, Min Young**, Kyungpook National University, Korea South  
**Ko, Sang Choon**, Electronics. and Telecom. Research Inst., Korea South  
**Kotulska, Malgorzata**, Wroclaw University of Technology, Poland  
**Kockar, Hakan**, Balikesir University, Turkey  
**Kong, Ing**, RMIT University, Australia  
**Kratz, Henrik**, Uppsala University, Sweden

**Krishnamoorthy, Ganesh**, University of Texas at Austin, USA  
**Kumar, Arun**, University of Delaware, Newark, USA  
**Kumar, Subodh**, National Physical Laboratory, India  
**Kung, Chih-Hsien**, Chang-Jung Christian University, Taiwan  
**Lacnjevac, Caslav**, University of Belgrade, Serbia  
**Lay-Ekuakille, Aime**, University of Lecce, Italy  
**Lee, Jang Myung**, Pusan National University, Korea South  
**Lee, Jun Su**, Amkor Technology, Inc. South Korea  
**Lei, Hua**, National Starch and Chemical Company, USA  
**Li, Fengyuan (Thomas)**, Purdue University, USA  
**Li, Genxi**, Nanjing University, China  
**Li, Hui**, Shanghai Jiaotong University, China  
**Li, Sihua**, Agiltron, Inc., USA  
**Li, Xian-Fang**, Central South University, China  
**Li, Yuefa**, Wayne State University, USA  
**Liang, Yuanchang**, University of Washington, USA  
**Liawruangrath, Saisunee**, Chiang Mai University, Thailand  
**Liew, Kim Meow**, City University of Hong Kong, Hong Kong  
**Lin, Hermann**, National Kaohsiung University, Taiwan  
**Lin, Paul**, Cleveland State University, USA  
**Linderholm, Pontus**, EPFL - Microsystems Laboratory, Switzerland  
**Liu, Aihua**, University of Oklahoma, USA  
**Liu Changgeng**, Louisiana State University, USA  
**Liu, Cheng-Hsien**, National Tsing Hua University, Taiwan  
**Liu, Songqin**, Southeast University, China  
**Lodeiro, Carlos**, University of Vigo, Spain  
**Lorenzo, Maria Encarnacio**, Universidad Autonoma de Madrid, Spain  
**Lukaszewicz, Jerzy Pawel**, Nicholas Copernicus University, Poland  
**Ma, Zhanfang**, Northeast Normal University, China  
**Majstorovic, Vidosav**, University of Belgrade, Serbia  
**Malyshev, V.V.**, National Research Centre 'Kurchatov Institute', Russia  
**Marquez, Alfredo**, Centro de Investigacion en Materiales Avanzados, Mexico  
**Matay, Ladislav**, Slovak Academy of Sciences, Slovakia  
**Mathur, Prafull**, National Physical Laboratory, India  
**Maurya, D.K.**, Institute of Materials Research and Engineering, Singapore  
**Mekid, Samir**, University of Manchester, UK  
**Melnyk, Ivan**, Photon Control Inc., Canada  
**Mendes, Paulo**, University of Minho, Portugal  
**Mennell, Julie**, Northumbria University, UK  
**Mi, Bin**, Boston Scientific Corporation, USA  
**Minas, Graca**, University of Minho, Portugal  
**Mishra, Vivekanand**, National Institute of Technology, India  
**Moghavvemi, Mahmoud**, University of Malaya, Malaysia  
**Mohammadi, Mohammad-Reza**, University of Cambridge, UK  
**Molina Flores, Esteban**, Benemérita Universidad Autónoma de Puebla, Mexico  
**Moradi, Majid**, University of Kerman, Iran  
**Morello, Rosario**, University "Mediterranea" of Reggio Calabria, Italy  
**Mounir, Ben Ali**, University of Sousse, Tunisia  
**Mrad, Nezih**, Defence R&D, Canada  
**Mulla, Imtiaz Sirajuddin**, National Chemical Laboratory, Pune, India  
**Nabok, Aleksey**, Sheffield Hallam University, UK  
**Neelamegam, Periasamy**, Sastra Deemed University, India  
**Neshkova, Milka**, Bulgarian Academy of Sciences, Bulgaria  
**Oberhammer, Joachim**, Royal Institute of Technology, Sweden  
**Ould Lahoucine, Cherif**, University of Guelma, Algeria  
**Pamidighanta, Sayanu**, Bharat Electronics Limited (BEL), India  
**Pan, Jisheng**, Institute of Materials Research & Engineering, Singapore  
**Park, Joon-Shik**, Korea Electronics Technology Institute, Korea South  
**Passaro, Vittorio M. N.**, Politecnico di Bari, Italy  
**Penza, Michele**, ENEA C.R., Italy  
**Pereira, Jose Miguel**, Instituto Politecnico de Setebal, Portugal  
**Petsev, Dimiter**, University of New Mexico, USA  
**Pogacnik, Lea**, University of Ljubljana, Slovenia  
**Post, Michael**, National Research Council, Canada  
**Prance, Robert**, University of Sussex, UK  
**Prasad, Ambika**, Gulbarga University, India  
**Prateepasen, Asa**, Kingmoungut's University of Technology, Thailand  
**Pugno, Nicola M.**, Politecnico di Torino, Italy  
**Pullini, Daniele**, Centro Ricerche FIAT, Italy  
**Pumera, Martin**, National Institute for Materials Science, Japan  
**Radhakrishnan, S.**, National Chemical Laboratory, Pune, India  
**Rajanna, K.**, Indian Institute of Science, India  
**Ramadan, Qasem**, Institute of Microelectronics, Singapore  
**Rao, Basuthkar**, Tata Inst. of Fundamental Research, India  
**Raouf, Kosai**, Joseph Fourier University of Grenoble, France  
**Rastogi Shiva, K.**, University of Idaho, USA  
**Reig, Candid**, University of Valencia, Spain  
**Restivo, Maria Teresa**, University of Porto, Portugal  
**Robert, Michel**, University Henri Poincare, France  
**Rezazadeh, Ghader**, Urmia University, Iran  
**Royo, Santiago**, Universitat Politècnica de Catalunya, Spain  
**Rodriguez, Angel**, Universitat Politècnica de Catalunya, Spain  
**Rothberg, Steve**, Loughborough University, UK  
**Sadana, Ajit**, University of Mississippi, USA  
**Sadeghian Marnani, Hamed**, TU Delft, The Netherlands  
**Sapozhnikova, Ksenia**, D.I.Mendeleyev Institute for Metrology, Russia  
**Sandacci, Serghei**, Sensor Technology Ltd., UK  
**Saxena, Vibha**, Bbhba Atomic Research Centre, Mumbai, India  
**Schneider, John K.**, Ultra-Scan Corporation, USA  
**Sengupta, Deepak**, Advance Bio-Photonics, India  
**Seif, Selemeni**, Alabama A & M University, USA  
**Seifter, Achim**, Los Alamos National Laboratory, USA  
**Shah, Kriyang**, La Trobe University, Australia  
**Sankarraaj, Anand**, Detector Electronics Corp., USA  
**Silva Giroa, Pedro**, Technical University of Lisbon, Portugal  
**Singh, V. R.**, National Physical Laboratory, India  
**Slomovitz, Daniel**, UTE, Uruguay  
**Smith, Martin**, Open University, UK  
**Soleymanpour, Ahmad**, University of Toledo, USA  
**Somani, Prakash R.**, Centre for Materials for Electronics Technol., India  
**Sridharan, M.**, Sastra University, India  
**Srinivas, Talabattula**, Indian Institute of Science, Bangalore, India  
**Srivastava, Arvind K.**, NanoSonix Inc., USA  
**Stefan-van Staden, Raluca-Ioana**, University of Pretoria, South Africa  
**Stefanescu, Dan Mihai**, Romanian Measurement Society, Romania  
**Sumriddetchka, Sarun**, National Electronics and Comp. Technol. Center, Thailand  
**Sun, Chengliang**, Polytechnic University, Hong-Kong  
**Sun, Dongming**, Jilin University, China  
**Sun, Junhua**, Beijing University of Aeronautics and Astronautics, China  
**Sun, Zhiqiang**, Central South University, China  
**Suri, C. Raman**, Institute of Microbial Technology, India  
**Syssoev, Victor**, Saratov State Technical University, Russia  
**Szewczyk, Roman**, Industr. Research Inst. for Automation and Measurement, Poland  
**Tan, Ooi Kiang**, Nanyang Technological University, Singapore  
**Tang, Dianping**, Southwest University, China  
**Tang, Jaw-Luen**, National Chung Cheng University, Taiwan  
**Teker, Kasif**, Frostburg State University, USA  
**Thirunavukkarasu, I.**, Manipal University Karnataka, India  
**Thumbavanam Pad, Kartik**, Carnegie Mellon University, USA  
**Tian, Gui Yun**, University of Newcastle, UK  
**Tsiantos, Vassilios**, Technological Educational Institute of Kaval, Greece  
**Tsigara, Anna**, National Hellenic Research Foundation, Greece  
**Twomey, Karen**, University College Cork, Ireland  
**Valente, Antonio**, University, Vila Real, - U.T.A.D., Portugal  
**Vanga, Raghav Rao**, Summit Technology Services, Inc., USA  
**Vaseashta, Ashok**, Marshall University, USA  
**Vazquez, Carmen**, Carlos III University in Madrid, Spain  
**Vieira, Manuela**, Instituto Superior de Engenharia de Lisboa, Portugal  
**Vigna, Benedetto**, STMICROELECTRONICS, Italy  
**Vrba, Radimir**, Brno University of Technology, Czech Republic  
**Wandelt, Barbara**, Technical University of Lodz, Poland  
**Wang, Jiangping**, Xi'an Shiyong University, China  
**Wang, Kedong**, Beihang University, China  
**Wang, Liang**, Pacific Northwest National Laboratory, USA  
**Wang, Mi**, University of Leeds, UK  
**Wang, Shinn-Fwu**, Ching Yun University, Taiwan  
**Wang, Wei-Chih**, University of Washington, USA  
**Wang, Wensheng**, University of Pennsylvania, USA  
**Watson, Steven**, Center for NanoSpace Technologies Inc., USA  
**Weiping, Yan**, Dalian University of Technology, China  
**Wells, Stephen**, Southern Company Services, USA  
**Wolkenberg, Andrzej**, Institute of Electron Technology, Poland  
**Woods, R. Clive**, Louisiana State University, USA  
**Wu, DerHo**, National Pingtung Univ. of Science and Technology, Taiwan  
**Wu, Zhaoyang**, Hunan University, China  
**Xiu Tao, Ge**, Chuzhou University, China  
**Xu, Lisheng**, The Chinese University of Hong Kong, Hong Kong  
**Xu, Sen**, Drexel University, USA  
**Xu, Tao**, University of California, Irvine, USA  
**Yang, Dongfang**, National Research Council, Canada  
**Yang, Shuang-Hua**, Loughborough University, UK  
**Yang, Wuqiang**, The University of Manchester, UK  
**Yang, Xiaoling**, University of Georgia, Athens, GA, USA  
**Yaping Dan**, Harvard University, USA  
**Ymeti, Aurel**, University of Twente, Netherland  
**Yong Zhao**, Northeastern University, China  
**Yu, Haihu**, Wuhan University of Technology, China  
**Yuan, Yong**, Massey University, New Zealand  
**Yufera Garcia, Alberto**, Seville University, Spain  
**Zakaria, Zulkarnay**, University Malaysia Perlis, Malaysia  
**Zagnoni, Michele**, University of Southampton, UK  
**Zamani, Cyrus**, Universitat de Barcelona, Spain  
**Zeni, Luigi**, Second University of Naples, Italy  
**Zhang, Minglong**, Shanghai University, China  
**Zhang, Qintao**, University of California at Berkeley, USA  
**Zhang, Weiping**, Shanghai Jiao Tong University, China  
**Zhang, Wenming**, Shanghai Jiao Tong University, China  
**Zhang, Xueji**, World Precision Instruments, Inc., USA  
**Zhong, Haoxiang**, Henan Normal University, China  
**Zhu, Qing**, Fujifilm Dimatix, Inc., USA  
**Zorzano, Luis**, Universidad de La Rioja, Spain  
**Zourob, Mohammed**, University of Cambridge, UK

# Contents

Volume 141  
Issue 6  
June 2012

www.sensorsportal.com

ISSN 1726-5479

## Editorial

### IFSA Publishing Starts to Publish Hardcover and Paperback Books

*Sergey Y. Yurish, Editor-in-Chief* ..... 1

## Research Articles

### Research in Nanothermometry Part 4. Amorphous Alloys of Thermo-resistive Thermometry

*Bohdan Stadnyk, Svyatoslav Yatsyshyn, Pylyp Skoropad*..... 1

### Research in Nanothermometry. Part 5. Noise Thermometry and Nature of Substance

*Svyatoslav Yatsyshyn, Bohdan Stadnyk, Zinoviy Kolodiy*..... 8

### Design of Linearized Thermistor Connection Circuit Using Modified 555 Timer

*Narayana K. V. L. and Bhujanga Rao A*..... 17

### Design and Development of Microcontroller Based Photoacoustic Spectrometer

*P. Bhaskar, Immanuel J., and Bhagyajyoti*..... 26

### The Design of a New Instrument for Pen-contact Force Information Acquisition During Handwriting

*Jianfei Luo, Baoyuan Wu, Qiushi Lin, Zhongcheng Wu, Fei Shen* ..... 35

### ARM Cortex Processor Based Closed Loop Servo Motor Position Control System

*Madhusudhana Reddy Narayanareddygar, Nagabhushan Raju. K, Chandra Mouli. C., Chandrasekhar Reddy Devanna* ..... 45

### The Hardware Design Technique for Ultrasonic Process Tomography System

*Mohd Hafiz Fazalul Rahiman, Ruzairi Abdul Rahim, Herlina Abdul Rahim and Nor Muzakkir Nor Ayob* ..... 52

### Design, Development and Testing of a Semi Cylindrical Capacitive Sensor for Liquid Flow Rate Measurement in Process Industry

*Sagarika Pal, Sharmi Ganguly* ..... 62

### Synchronization Based SAW Sensor Using Delay Line Coupled Dual Oscillator Phase Dynamics

*Shashank S. Jha and R. D. S. Yadava* ..... 71

### Intelligent Robust Nonlinear Controller for MEMS Angular Rate Sensor

*Mohammad-Reza Moghanni-Bavil-Olyaei, Ahmad Ghanbari, Jafar Keighobadi* ..... 92


### Analysis of the Self-Calibration Process in a Displacement Sensor in Applications of Hip or Knee Implants

*Shiying Hao* ..... 106

<b>Acoustic Detector for Determining the Type and Concentration of a Solution</b> <i>Tariq Younes</i> .....	119
<b>Low Concentration Sodium Chloride Salinity Detection System</b> <i>Hee C. Lim, Hio Giap Ooi, Yew Fong Hor</i> .....	127
<b>ARM Processor Based Embedded System for Examination Question Paper Leakage Protection System</b> <i>Jyothi Pattipati, Chandra Mouli Chakala, Chaitanya Pavan Kanchisamudram, Nagaraja Chiyedu and Nagabhushan Raju Konduru</i> .....	134

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: editor@sensorsportal.com  
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).



**Handbook  
of Laboratory Measurements  
and Instrumentation**


Maria Teresa Restivo  
Fernando Gomes de Almeida  
Maria de Fátima Chouzal  
Joaquim Gabriel Mendes  
António Mendes Lopes

## Handbook of Laboratory Measurements and Instrumentation

---

**Maria Teresa Restivo**  
**Fernando Gomes de Almeida**  
**Maria de Fátima Chouzal**  
**Joaquim Gabriel Mendes**  
**António Mendes Lopes**

The Handbook of Laboratory Measurements and Instrumentation presents experimental and laboratory activities with an approach as close as possible to reality, even offering remote access to experiments, providing to the reader an excellent tool for learning laboratory techniques and methodologies. Book includes dozens videos, animations and simulations following each of chapters. It makes the title very valued and different from existing books on measurements and instrumentation.



**International Frequency Sensor Association Publishing**

**Order online:**  
[http://www.sensorsportal.com/HTML/BOOKSTORE/Handbook\\_of\\_Measurements.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Handbook_of_Measurements.htm)

## Acoustic Detector for Determining the Type and Concentration of a Solution

**Tariq Younes**

Faculty of Engineering Technology, Department of Mechatronics Engineering,  
Al Balqa' Applied University, 15008 Amman 11134 Jordan  
E-mail: tariqmog@bau.edu.jo

*Received: 2012 /Accepted: 18 June 2012 /Published: 29 June 2012*

---

**Abstract:** The problem of determining the type and concentration of a solution is an important issue in food, medical and chemical industries. In this paper, a work effort has been made to explore the possibility of designing acoustic detector to determine the type and concentration of a solution. Signal conditioning and processing was carried out by using LabVIEW (G Language) VIs. Experimental results show that the produced acoustic signal frequency can be used as an informative parameter related with the type and concentration of a solution. Also, linear range of measurement is found of 10 g/100 ml. Furthermore, acceptable results for common industrial applications are drawn with a maximum percentage error of 3 % compared with the conventional approach. As a result, such detector can be integrated with control system in order to perform some control actions.

*Copyright © 2012 IFSA.*

**Keywords:** Standing wave, Acoustic resonance, LabVIEW VI, Concentration of solution.

---

### 1. Introduction

The problem of determining the type and concentration of a solution is still an important issue in solution mining and chemical processing [1]. Since undesirable containment of solute in water may cause noticeable change in environmental parameters which play a great role in human life and industry. For example, the solute content in liquefied food product is an important parameter in determining the value, stability, quality, and processibility of the product. The measurement and control of the amount of solute present is an important concern for food processors.

Another example is the utilization of ionic liquids which are finding widespread use as solvents in

several applications, including biphasic catalysis, liquid–liquid extraction, and organometallic synthesis [2-4]. For those reasons, it is essential to have a fast and efficient method of determining the type of solute in water.

Several techniques and methods are in use, or have been investigated to determine the concentration of solution [5]. Electrical property of a solution is used to measure its concentration. An example is conductometry, which is based on measuring the presence of free ions (conductivity) of electrolyte solutions [6]. Infrared spectrophotometers have been utilized to measure moisture content, particularly in milk. The infrared spectrum of a sample is recorded by passing a beam of infrared through the sample [7]. Nuclear magnetic resonance is a technique, which is used to measure solids/liquids ratio and hence the solids content [8]. Other techniques such as chromatography, mass and photo spectrometers provide reliable measurement of concentration of a solution with high accuracy [9]. Nevertheless, these technologies are still fairly expensive. Selection of the right technique depends on the field of application where the measurement of concentration of solution is required. It depends also on the required accuracy, reliability of measurement, and the operating environment.

Ultrasound is also used for measuring the concentration of simple solutions. In this case, the speed of sound is used to characterize the structure of material. The behavior of traveled sound wave usually depends on the type of the medium i.e. it travels more rapidly through solids than liquids [10]. It was shown that the speed of sound in a fluid changes with concentration (solids content) of a given material, and ultrasound was utilized to measure the concentration of solution with good precision [11].

Acoustic Emission (AE) has been successfully applied in many fields of material sciences [12]. For example, AE is a very attractive non intrusive technique for monitoring crystallization processes [13].

Acoustic methods based on creating an acoustic standing wave within a waveguide are also used to measure the concentration of substance in liquids and gases [14]. Computerized acoustic detectors [14, 15] were developed to measure concentration of gases and vapors. Such detectors were an integral part of gas chromatograph.

Acoustic field was also combined with thermo effect to build a simple analyzer [16] which was used to measure the concentration of water content in kerosene. The signal obtained by this analyzer was presented as a “chromatogram”.

The literature review of existing measurement detectors or analyzers which are used to determine the type and concentration of a solution shows that this issue is still developing. This explains why research and development in this field is a viable continuous process. Determining the type and concentration and of a solution can be realized using different types of analyzers and detectors. The work described in this paper presents the possibility of using an acoustic measurement in order to determine the type and concentration of solution.

## **2 .Overview of the Acoustic Detector**

The block diagram of an Acoustic Detector (AD) is shown in Fig. (1). This detector is used to determine the type of solution and its concentration.

It includes two heads of a stethoscope type 3M Littmann, acoustic receiver AR (microphone type HCM4530), acoustic transmitter AT ( speaker type TM-2A), air tubes, a chamber made of glass, sound card type Creative CT4810 and PC with LabVIEW software.

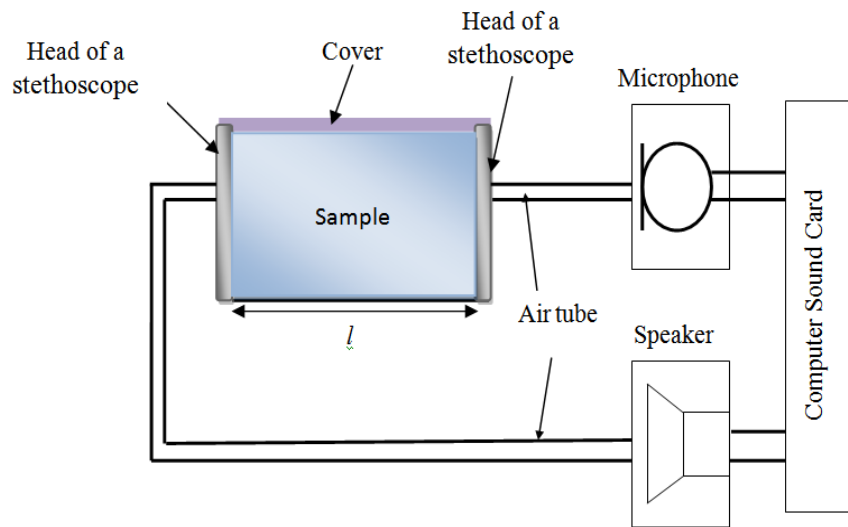


Fig. 1. The block diagram of the Acoustic Detector.

The operating principle of the proposed detector is based on acoustic resonance when a standing wave is created in a chamber filled by a solution. The standing wave may be created using the principle of acoustic resonance, which is usually realized by using a speaker- microphone combination [17]. The sound card of PC is utilized in order to create an acoustic standing wave between the (AT) and (AR) which is transmitted through the sample under test. As a result, the speed of transmitted acoustic signal varies depending on the type of the medium filled in the chamber. This variation of speed is usually characterized by the frequency of created acoustic standing wave, when the distance between the two heads of stethoscope is constant.

### 3. Mathematical Model

In section 2, we have mentioned that the speed of sound varies depending on the medium through which the sound wave passes. If the solution is an aqueous solution of NaCl or KCl, the speed of sound is given by [18]:

$$c = \sqrt{\frac{E}{\rho}} \quad (1)$$

where  $C$  is the speed of sound,  $E$  is the bulk modulus, and  $\rho$  is the Density of media.

In [14, 19], it was shown that for aqueous solution, the speed of sound in a solution can be written as

$$c = \sqrt{\frac{\tilde{E}}{\tilde{\rho}}} \quad (2)$$

where  $\tilde{E} = E_{\text{water}} + E_{\text{solution}}$  and  $\tilde{\rho} = \rho_{\text{water}} + \rho_{\text{solution}}$ .

The frequency of free resonance when a standing wave is generated within a chamber is given as

$$f = \frac{C}{2L}, \quad (3)$$

where  $f$  is the frequency of generated standing wave in free resonance mode,  $L$  is the distance between two heads of stethoscope.

From (2) and (3), the frequency can be written as

$$f = \frac{\sqrt{F}}{2L} = \frac{\sqrt{E}}{2L} \cdot \sqrt{\frac{1}{\rho}} \quad (4)$$

$$f = \frac{\sqrt{E}}{2L} \cdot \sqrt{\frac{1}{\rho}} = K \sqrt{\frac{1}{\rho}} \quad (5)$$

From (5), it is noted that the frequency is a function of density.

#### 4. Signal Conditioning and Processing

Fig. 2 shows the block diagram of LabVIEW program which is used to measure the frequency of the microphone input. To measure the frequency, the signal from the microphone is fed to the MIC input of the sound card of PC. The sound card is configured to generate an acoustic standing wave in free resonance mode. In this case, the output of the AR is fed to the sound card during which the signal is amplified and fed back to the AT. Then, this signal is measured using computer software. The signal acquisition and processing were realized using LabVIEW software [20-21]. In such experimental arrangement, one can measure, store, and log the data to the computer. Also, the use of measured variable for further display and control purposes is obtained.

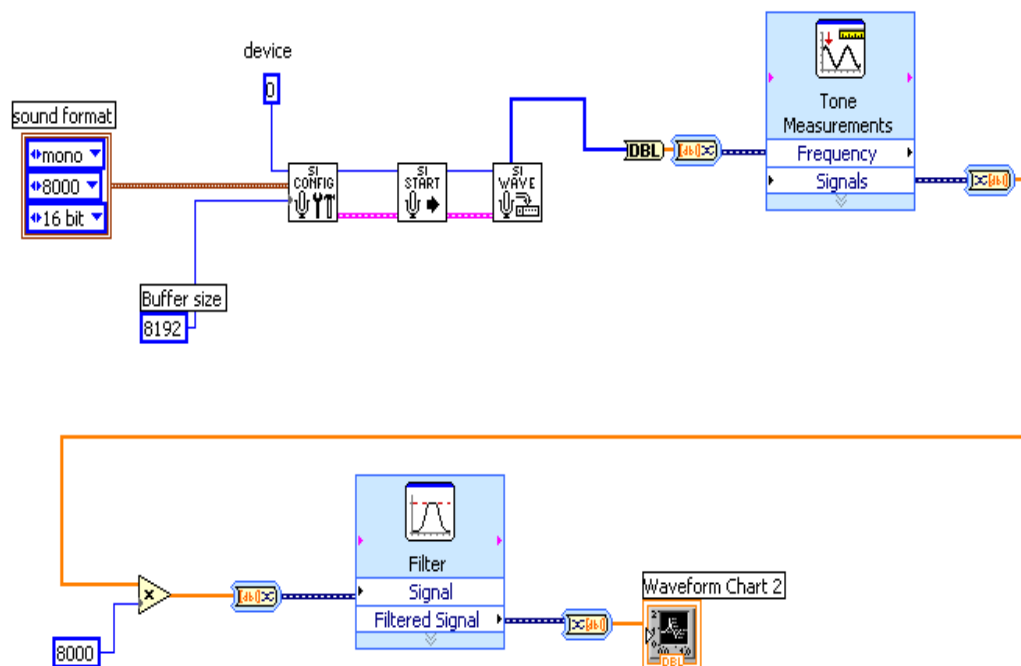


Fig. 2. Block diagram of LabVIEW program.

The detail description for each LabVIEW VIs used to build the block diagram is presented in Appendix 1.


## 5. Experimental Results

Aqueous solutions of sodium chloride and potassium chloride were used as samples under test. The resonance frequency of each medium as a function of concentration was determined and it was compared favorably with the conventional approach [22]. The frequency of sound was determined for aqueous solutions of sodium chloride and potassium chloride over applicable concentration range of 1 – 10 g/100 ml as shown in Table 1.

**Table 1.** Experimental results.

Density of solution [g/ 100ml]	Frequency, [Hz]	
	KCl	NaCl
1	2300	2680
2	2352	2700
3	2380	2780
4	2410	2830
5	2430	2848
6	2475	2890
7	2510	2920
8	2540	2958
9	2590	3010
10	2750	3045

To represent experimental data, the method of data regression is used by utilizing Excel curve fitting. The linear regression model  $y = ax + b$  is used to fit the regression model of the detector for both aqueous solutions of sodium chloride and potassium chloride as is shown in Fig. (3).

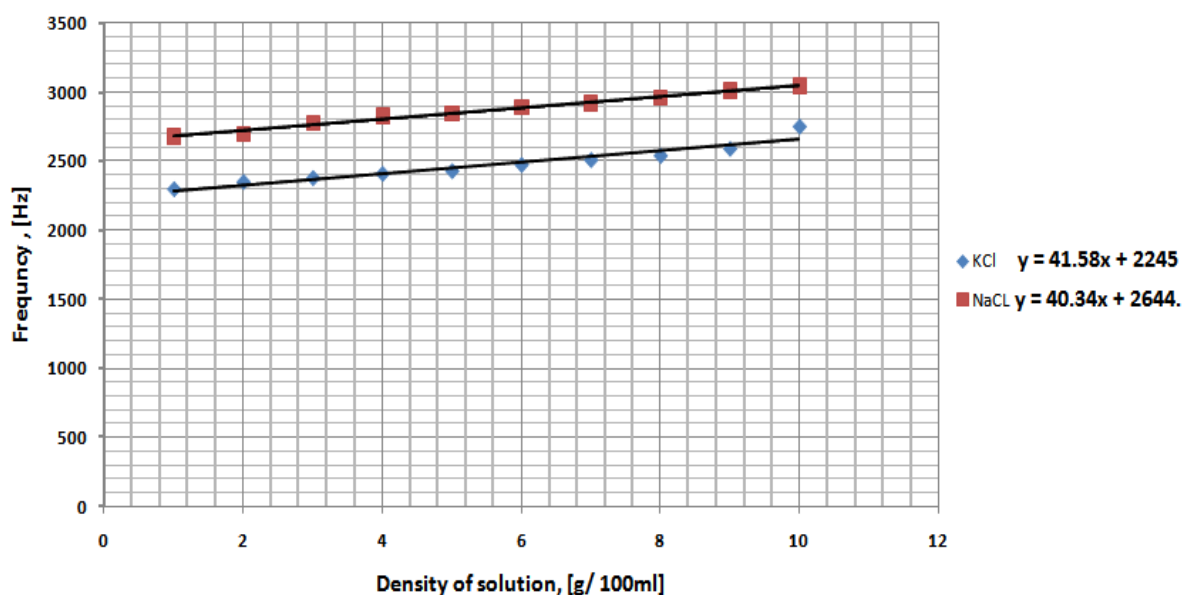

**Fig. 3.** Measured frequency for aqueous solution of potassium chloride and sodium chloride.

From the experimental results and regression model, it is obvious that maximum relative error is equal to 3 %. Interestingly, it is worthy of noting that the environment influences as temperature, humidity and vibration have a minimum negligible effect on detector performance. That is due to that the chamber material is made of any isolating material with any wall thickness.


## 6. Conclusions

In this paper, a simple computerized measurement system was developed to determine the type and concentration of solution. Experimental results showed that it is possible to make use of the standing wave phenomenon for the design of acoustic detector which may be used to determine the concentration and the type of a solution. As a future work, it is possible to design an acoustic analyzer to determine the type and consternation of a solution using the proposed acoustic detector. Using such data acquisition system allows to log the measurement and to use it for further control purposes.

## Appendix 1

### a) Sound Input CONFIGURE VI:


The purpose of this VI is to configure a sound device for sound input operation as shown in Fig. 4, the device is selected through the device number terminal, the selected number is 1 which is associated with the microphone in the LabVIEW, also the sound format terminal is fed by a constant controller.

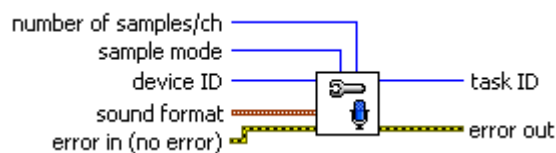

**Fig. 4.** Sound Input CONFIGURE VI.

### b) Sound Input START VI:


This VI prompts the sound input device to begin accumulating incoming data as shown in Fig. 5.



**Fig. 5.** Sound Input START VI.

### c) Sound Input READ VI:


The SI READ VI is used to read data from the sound input device. If data has arrived in the device buffer; it returns the data after buffering. Otherwise, it waits until data arrives .The microphone signal wave graph is fed from the output of this VI. The symbol of the VI is shown in Fig. 6.

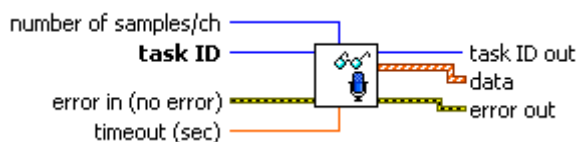

**Fig. 6.** Sound Input READ VI.

d) Tone Measurements VI:

The Tone Measurements VI shown in Fig. 7 is used to measure the frequency of input signal and returns the value through its output terminal. The frequency numeric indicator in the front panel is fed from the output terminal of this VI.



**Fig. 7.** Tone Measurements VI.

## References

- [1]. Sonic Method And Means For Determination Of Solution Concentrations, *USA Patent No.* US3648513.
- [2]. J. Dupont R. F. de Souza, P. A. Z Suarez, *Chem. Rev.*, 102, 2002, p. 3667.
- [3]. P. J. Dyson, *Appl. Organomet. Chem.*, 2002, 16, p. 495.
- [4]. Huddleston, J. G., Willauer, H. W., Swatloski, R. P., Visser, A. E., Rogers, R. D., Room Temperature Ionic Liquids as Novel Media for 'Clean' Liquid-Liquid Extraction, *Chem. Commun.*, 1998, pp. 1765-1766.
- [5]. Bradley R. L., Moisture and Total Solids Analysis. in: Nielsen SS, editor. Introduction to the Chemical Analysis of Foods, 1<sup>st</sup> ed., *Jones and Bartlett.*, Boston, 1994, pp. 93-111.
- [6]. Lyubov P. Safonova and Arkadii M. Kolker, Conductometry of electrolyte solutions, *Russ. Chem. Rev.*, 61, 1992, p. 959.
- [7]. Stuart, B., Infrared Spectroscopy, *Kirk-Othmer Encyclopedia of Chemical Technology*, 2<sup>Ed</sup>, 2002.
- [8]. Basaran T. K., Coupland J. N., McClements D. J., Monitoring molecular diffusion of sucrose in xanthan solutions using velocity measurements, *J. Food Sci.*, 64, 1, 1999, pp. 125-128.
- [9]. Daniel C. Harris, *Quantitative Chemical Analysis*, 8<sup>th</sup> edition, 2010.
- [10]. McClements D. J., Povey J. W., Solid fat content determination using ultrasonic velocity measurements, *Int. J. Food Sci. Technol.*, 22, 6, 1987, pp. 491-499.
- [11]. David P, Voge J., Propagation of waves, *Pergamon Press*, Oxford, 1969, 329 p.
- [12]. Marec, J. Thomas, et R. El Guerjouma, Damage characterization of polymerbased composite materials: Multivariable analysis and wavelet transform for clustering acoust. Emission data, *Mech. Syst. & Signal Proces.*, 22, 2008, pp. 1441-1464.
- [13]. Nesrine Gherras, Eric Serris And Gilles Févottea, Acoustic On-Line Monitoring Of Solution Crystallization Process In Pure And Impure Media, *International Symposium on Industrial Crystallization ISIC 18*, Milano, Italy.
- [14]. Shebel A. Alsabbah & Tariq Mughrabi, Neural Network-Based Waveguide Acoustic Gas Detector, in *Proceeding of the 5<sup>th</sup> IEEE International Symposium on Mechatronics and its Applications (ISM' 08)*, Amman, Jordan, May 27-29, 2008.
- [15]. Tariq Younes, Ilyasov L. V., Acoustic detector of gases and vapors, *Patent No.* 33822, 2003, Russian Federation.

- [16].Tariq Mansour Al Mograbi, Thermoacoustic Analyzer for Water content Detection in Hydrocarbon Emulsion, in *Proc. of the Sensor Systems for Environmental Monitoring Conference*, 14<sup>th</sup> October 2010, Royal Society of Chemistry Burlington House, London.
- [17].Mohammad A. K. Alia and Tariq Al Mograbi, Investigation of An Acoustic Temperature Transducer and its Application for Heater Temperature Measurement, *American Journal of Applied Sciences*, 4, 5, 2007, pp. 294-299.
- [18].Thomas D. Rossing, Handbook of Acoustics, *Springer*, 1<sup>st</sup> Ed, 2007, XXIV, p. 47.
- [19].Green Book, 2<sup>nd</sup> ed., p. 42 PAC, 1996, 68, 957 (Glossary of terms in quantities and units in Clinical Chemistry (IUPAC-IFCC Recommendations 1996)) on page 979.
- [20].Tariq Al Mograbi, Mohammad A. K. Alia, Mohammad Abuzalata, Design of an Acoustic Displacement Transducer, *Sensors & Transducers*, Vol. 112, Issue 1, January 2010, pp. 1-9.
- [21].Johnson, G. W., LabVIEW Graphical Programming. Practical Applications in Instrumentation and Control.
- [22].DelGRosso and E. J. Smura, Materials suitable for sound applicants: I. Ultrasonic velocities and impedance of selected liquids, *MC Graw- Hill, Inc*, USA, 1994; V. A Naval Research Laboratory, rep. 4191, 1953.

2012 Copyright ©, International Frequency Sensor Association (IFSA). All rights reserved.  
(<http://www.sensorsportal.com>)

## Uncooled Infrared Cameras and Detectors Thermography and Vision Markets 2010 – 2015

IFSA offers  
a SPECIAL PRICE

### **MEMS Micro-Bolometers Drive Growth**

*This report provides market data on both camera and detector; IR camera supply chain levels and main technological trends for detector/microbolometer.*

[http://www.sensorsportal.com/HTML/Detectors\\_for\\_Thermography.htm](http://www.sensorsportal.com/HTML/Detectors_for_Thermography.htm)



## Uncooled Infrared Imaging Market: Commercial & Military applications

### **Market & Technology Report to 2016**

Promoted  
by  
**IFSA**

*This new 2011 IR report , is an updated and in depth analysis of commercial markets covered in the 2010 report in addition we have included a new analysis of the military markets.*

[http://www.sensorsportal.com/HTML/Detectors\\_for\\_Thermography.htm](http://www.sensorsportal.com/HTML/Detectors_for_Thermography.htm)



The 3rd International Conference on Sensor Device Technologies and Applications



## SENSORDEVICES 2012

19 - 24 August 2012 - Rome, Italy

Deadline for papers: 5 April 2012



**Tracks:** Sensor devices - Ultrasonic and Piezosensors - Photonics - Infrared - Geosensors - Sensor device technologies - Sensors signal conditioning and interfacing circuits - Medical devices and sensors applications - Sensors domain-oriented devices, technologies, and applications - Sensor-based localization and tracking technologies

<http://www.aria.org/conferences2012/SENSORDEVICES12.html>

The 6th International Conference on Sensor Technologies and Applications



## SENSORCOMM 2012

19 - 24 August 2012 - Rome, Italy

Deadline for papers: 5 April 2012



**Tracks:** Architectures, protocols and algorithms of sensor networks - Energy, management and control of sensor networks - Resource allocation, services, QoS and fault tolerance in sensor networks - Performance, simulation and modelling of sensor networks - Security and monitoring of sensor networks - Sensor circuits and sensor devices - Radio issues in wireless sensor networks - Software, applications and programming of sensor networks - Data allocation and information in sensor networks - Deployments and implementations of sensor networks - Under water sensors and systems - Energy optimization in wireless sensor networks

<http://www.aria.org/conferences2012/SENSORCOMM12.html>

The 5th International Conference on Advances in Circuits, Electronics and Micro-electronics



## CENICS 2012

19 - 24 August 2012 - Rome, Italy

Deadline for papers: 5 April 2012



**Tracks:** Semiconductors and applications - Design, models and languages - Signal processing circuits - Arithmetic computational circuits - Microelectronics - Electronics technologies - Special circuits - Consumer electronics - Application-oriented electronics

<http://www.aria.org/conferences2012/CENICS12.html>

## Guide for Contributors

---

### Aims and Scope

*Sensors & Transducers Journal* (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because of it is a peer reviewed international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per year by International Frequency Sensor Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc. Since 2011 the journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in Elsevier products.

### Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

### Submission of papers

Articles should be written in English. Authors are invited to submit by e-mail [editor@sensorsportal.com](mailto:editor@sensorsportal.com) 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

### Advertising Information

Advertising orders and enquires may be sent to [sales@sensorsportal.com](mailto:sales@sensorsportal.com) Please download also our media kit: [http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2012.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2012.pdf)

***Digital Sensors and Sensor Systems: Practical Design*** will greatly benefit undergraduate and at PhD students, engineers, scientists and researchers in both industry and academia. It is especially suited as a reference guide for practitioners, working for Original Equipment Manufacturers (OEM) electronics market (electronics/hardware), sensor industry, and using commercial-off-the-shelf components, as well as anyone facing new challenges in technologies, and those involved in the design and creation of new digital sensors and sensor systems, including smart and/or intelligent sensors for physical or chemical, electrical or non-electrical quantities.



*"It is an outstanding and most completed practical guide about how to deal with frequency, period, duty-cycle, time interval, pulse width modulated, phase-shift and pulse number output sensors and transducers and quickly create various low-cost digital sensors and sensor systems ..."* (from a review)

Order online:

[http://www.sensorsportal.com/HTML/BOOKSTORE/Digital\\_Sensors.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Digital_Sensors.htm)



[www.sensorsportal.com](http://www.sensorsportal.com)